




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification⁴ : C25F 5/00</p>	<p>A1</p>	<p>(11) International Publication Number: WO 86/ 03230 (43) International Publication Date: 5 June 1986 (05.06.86)</p>
<p>(21) International Application Number: PCT/US85/02265 (22) International Filing Date: 15 November 1985 (15.11.85) (31) Priority Application Number: 672,777 (32) Priority Date: 19 November 1984 (19.11.84) (33) Priority Country: US</p> <p>(71) Applicant: CHEVRON RESEARCH COMPANY [US/US]; P.O. Box 7141, San Francisco, CA 94120-7141 (US). (72) Inventors: HUBRED, Gale, L. ; 1960 Tulare Avenue, Richmond, CA 94805 (US). DUBROVSKY, Michael ; 1140 Cornell Avenue, Albany, CA 94706 (US). SCHROEDER, Albert, H. ; #6 West Chanslor court, Richmond, CA 94801 (US).</p>		<p>(74) Agents: BUCHANAN, J., A., Jr. et al.; Chevron Research Company, P.O. Box 7141, San Francisco, CA 94120-7141 (US). (81) Designated States: DE (European patent), FR (European patent), GB (European patent), JP. Published <i>With international search report.</i></p>

(54) Title: ELECTROLYTIC REDUCTION OF COBALTIC AMINE

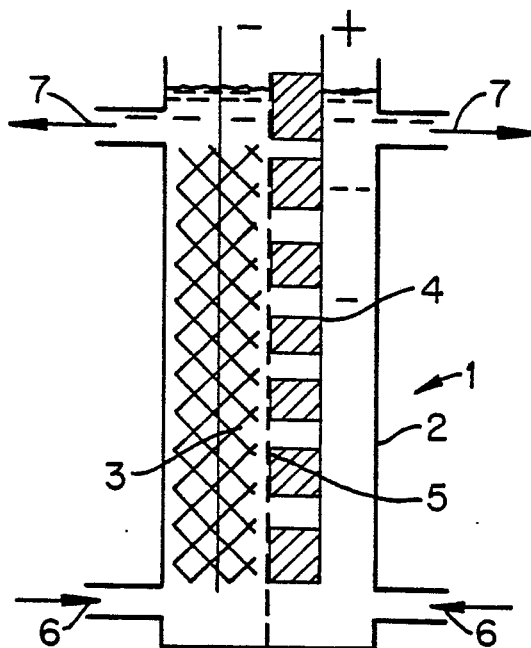

(57) Abstract

A process for the reduction of Co^{+3} to Co^{+2} in an aqueous ammoniacal solution in the presence of a porous cathode. Prior to this reduction, the aqueous ammoniacal solution is passed over activated carbon to remove organic contaminants from the aqueous ammoniacal solution.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GA	Gabon	MR	Mauritania
AU	Australia	GB	United Kingdom	MW	Malawi
BB	Barbados	HU	Hungary	NL	Netherlands
BE	Belgium	IT	Italy	NO	Norway
BG	Bulgaria	JP	Japan	RO	Romania
BR	Brazil	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	LI	Liechtenstein	SN	Senegal
CH	Switzerland	LK	Sri Lanka	SU	Soviet Union
CM	Cameroon	LU	Luxembourg	TD	Chad
DE	Germany, Federal Republic of	MC	Monaco	TG	Togo
DK	Denmark	MG	Madagascar	US	United States of America
FI	Finland	ML	Mali		
FR	France				

-1-

ELECTROLYTIC REDUCTION OF COBALDIC AMINE

TECHNICAL FIELD

05 This invention relates to an electrolytic
process for the reduction of Co^{+3} to Co^{+2} in an aqueous
ammoniacal solution. More particularly, it relates to the
reduction of Co^{+3} to Co^{+2} in the presence of a porous
cathode.

BACKGROUND OF THE INVENTION

10 It is known to use ammoniacal-ammonium salt
solutions for the recovery of cobalt from oxide ores, as
well as from spent hydroprocessing catalyst. Exemplary of
this type of art is U.S. Patent No. 3,929,468 which dis-
15 closes a selective reduction, oxidizing ammonia leach
process from oxide ores, and U.S. Patent Nos. 3,567,433;
4,442,074; and 4,432,949 which disclose the oxidative
roasting and leaching of spent hydroprocessing catalyst
with aqueous ammonia and ammonia salt solutions. The
20 cobalt after it is extracted from the oxide ore or spent
catalyst is in the +3 oxidation state.

It is also known in the prior art to extract
cobaltic ion from an ammoniacal leach solution using
(1) an x-hydroxy oxime such as described in U.S. Patent
Nos. 3,276,863 and 3,929,468 and (2) a beta-diketone as
25 described in U.S. Patent 4,258,016.

Additionally, the conversion of cobaltic ion to
cobaltous ion by contacting the trivalent cobalt with
cobalt metal is generally known as illustrated by D. N.
30 Nelsen, R. E. Siemens, and S. C. Roads, "Solvent Extrac-
tion of Cobalt from Laterite - Ammoniacal Leach Liquors",
U.S. Bureau of Mines, RI 8419.

Since most of the ammoniacal leaching operations
for cobalt extraction are carried out under oxidizing
35 conditions, the cobalt is in the cobaltic (III) rather
than the cobaltous (II) amine form. As a result, solvent
extraction operation for cobalt removal with extractants
such as hydroxy-oximes and beta-diketones requires a
reduction step that will reduce the cobaltic III amine
40 species. Economic evaluation indicates that use of cobalt
metal to reduce to Co^{+3} to Co^{+2} is cost prohibitive

-2-

because of the high cobalt inventory associated with this process and therefore other ways to reduce cobaltic (III) amine must be found.

While U.S. Patent No. 3,929,468 indicates that cobalt may be reduced from its trivalent state to its divalent state electrolytically, no other details are given for carrying out such a process.

The present invention provides an electrochemical process which is a simple and an economically convenient process for carrying out this reduction step.

SUMMARY OF THE INVENTION

In accordance with the present invention, there has been discovered an electrolytic process for the reduction of Co^{+3} to Co^{+2} in an aqueous ammoniacal solution in an electrolytic cell, comprising an anode compartment, a cathode compartment and a permeable membrane in contact with the anode and located between the anode and cathode compartments and wherein said cathode compartment contains a porous electrode having a porosity in the range of from about 30 to 60 percent comprising introducing the aqueous ammoniacal cobaltic (III) solution into the cathode compartment of the electrolytic cell, providing an aqueous electrolyte in the anode compartment, applying direct current to the anode and cathode to produce cobaltous (II) ions in the cathode compartment while substantially preventing migration of cobaltous (II) anions between the cathode and anode compartments by maintaining a permeable barrier between the anode and the porous cathode, removing produced gas from the anode compartment and removing the electrolyte containing cobaltous (II) ions from the cathode compartment. Prior to passing the aqueous ammoniacal solution through the electrolytic cell, the solution is passed over activated carbon to remove from the aqueous ammoniacal solution organic contaminants that could interfere with the electroreduction process.

40

BRIEF DESCRIPTION OF THE DRAWINGS

05 FIG. 1 is a schematic representation of an electrolytic cell used in the process of the present invention.

FIG. 2 shows the changes in the solution potential in the course of the electroreduction.

10 FIG. 3 shows the corresponding cobalt extraction values as obtained by a solvent extraction step using LIX 51 extractant applied to the electroreduced solution.

DETAILED DESCRIPTION OF THE INVENTION

The present invention provides an electrolytic method for reducing Co^{+3} to Co^{+2} in aqueous ammoniacal solutions which contain small amounts of Co^{+3} , for example, from 0.1 to 10 grams per liter.

15 In the method of the present invention, the aqueous ammoniacal, ammonium salt solution is passed through the electrolytic cell having a porous cathode and the reduction of Co^{+3} to Co^{+2} takes place at the porous cathode.


20 Prior to passing the aqueous ammoniacal solution through the electrolytic cell, the solution is passed over activated carbon to remove from the aqueous ammoniacal solution organic contaminants that could interfere with the electroreduction process.

25 The cell 1, which may be used for carrying out the present invention, is shown in FIG. 1 and comprises a cell container or body 2, a porous cathode 3, an anode 4, and a permeable membrane 5 to separate the anode and cathode compartments of the electrolytic cell 1. The anode is in contact with the permeable membrane. The cathode may or may not be in contact with the permeable membrane, however, it is preferable that the cathode does make contact with the membrane. The cell body 2 includes an opening 6 and 7, for admitting or removing solution. The cathode compartment of the electrolytic cell contains a catholyte solution which initially contains the cobaltic (III) anion solution as further described hereinafter. The anode compartment of the electrolytic

30
35
40


cell contains an anolyte solution, as further described hereinafter. The anode 4 and the cathode 3 are connected
 05 to a suitable source of direct current power source at their terminals. Heating or cooling means may also be provided to maintain the anolyte and the catholyte at the desired operating temperatures.

The method of the present invention includes
 10 passing the catholyte solution containing cobaltic (III) amine through a porous cathode cell (and thus through the porous cathode) while the cathode is under sufficient electrical potential to reduce the cobaltic (III) amine to
 15 cobaltous (II) amine. The electroreduction of the cobaltic amine from ammoniacal solution may be described by the following equation:



In the course of the electroreduction process, two side reactions can be expected to occur at the
 20 cathode.

Cobaltous Reduction



Water Reduction



The equilibrium potential for both of the latter side reaction is so close that they probably occur simultaneously. Based on the large differences in the equilibrium potentials between the cobaltic reduction and the side reactions, the cobaltic reduction can be considered
 30 as the main reaction. The side reactions are expected to occur under conditions in which cobaltic concentration has decreased to the extent that the transfer of cobaltic species to the electrode is rate limiting. These conditions are expected to occur at the end of the electro-
 35 reduction step and typically when the cobaltic concentration is below 100 ppm. The conventional electrolysis of water producing O₂ gas occurs at the anode.

The electrolytic cell may be operated at a
 40 constant current mode of from about 10 to 200 amperes/ft² and preferably from 10 to 50 amperes/ft², and at cell

voltages ranging from about 3 to 8 and preferably from about 4 to 5 volts.

05 The temperature of the catholyte may be from about 20°C to about 50°C and preferably from about 20°C to 30°C. The temperature of the anolyte may fall within the same range as given for the catholyte and preferably is within about 5°C of the catholyte
10 temperature.

 The anode 4 may be comprised of any electrically conductive, stable material. The anode preferably has a low over voltage and is resistant to corrosion and/or decomposition. Representative of anode materials are
15 lead, a platinum group metal, titanium coated with a platinum group metal, and carbonaceous materials such as carbon or graphite. As used herein, the term "platinum group metals" include all the metals of the platinum group, namely, ruthenium, rhodium, palladium, osmium,
20 iridium, and platinum. Furthermore, the oxide of the platinum metals or mixtures of two or more such oxides could be used as coating on the titanium metal. Anode materials which were found especially well suited include RuO₂/TiO₂ on a Ti substrate or IrO₂/TiO₂ on a Ti
25 substrate, which anodes are both commercially available.

 The cathode 3 is comprised of a porous electrode material through which the catholyte passes through. Porous electrodes employed in the electrolytic cell of the present invention may be any suitable
30 electrodes having a porosity in the range of from about 30 to about 60 percent. The porosity is defined as the ratio of the void to the total volume of the electrodes. Representative materials which may be used as cathode materials include sintered metals, sponge or gauze, as well as carbonaceous materials. The porous cathode materials, for
35 example, may be made from platinum or steel, or of materials which may be coated with an electroconductive metal. In one embodiment, the porous electrodes are fabricated from a fine mesh or a perforated sheet or plate
40 having a porosity of about 30 percent. A preferred

embodiment of the porous electrode is a three-dimensional electrode such as a reticulate electrode. These electrodes have increased surface area and particularly increased internal surface area. Their porosities are in the range of from about 30 to about 60 percent. The thickness of the cathode may vary depending upon such things as cathode material, cathode porosity, and the solution flow rates.

Various membranes which contact the anode and may optionally and preferably contact the cathode may be used in this invention. Such membranes are well-known in the electrolysis art and include porous glass frits, spun or woven asbestos, porous reinforced polymers, automotive battery-type separators (Daramic, supplied by Grace Corporation), and ion permselective membranes.

Typically, the ion permselective membrane, which may be anionic or cationic, is an ion-exchange membrane or sheet which is substantially impermeable to the aqueous electrolyte. These ion-exchange membranes are well-known per se and include both membranes where ion-exchange groups or materials are impregnated in or distributed throughout a polymeric matrix or binder, as well as those where such groups are associated only with the outer surface of a membrane backing or reinforcing fabric. Continuous ion-exchange membranes, in which the entire membrane structure has ion-exchange characteristics and which may be formed by molding or casting a partially polymerized ion-exchange resin into sheet form, may also be used.

The electrolytic conversion of Co^{+3} to Co^{+2} may be done in a batch operation wherein the anolyte and catholyte are recirculated from their respective reservoir through inlet 6 located near the bottom of the cell and allowed to overflow through outlet 7 near the top of the cell back to the reservoir until the desired depletion level is achieved.

The process may also be carried out under continuous flow conditions using a cascade system of cells

in which the solution is cascaded through a reservoir, through the cascade of cells, each having an inlet located
05 depleted solution being collected in a separate reservoir.

It is also possible that, during the operation of the process of the present invention, cobalt metal may be formed on the cathode. This cobalt metal deposit can be fully stripped from the electrodes after the current
10 has been terminated by passing fresh cobaltic amine solution through the cathode compartment. Generally, this dissolution period is a relatively short duration, e.g., a few hours or less.

Also, since the cobaltous amine product obtained
15 according to the process of this invention may be oxidized by air back to cobaltic amine, it is preferable that the process forms under an inert atmospheric blanket such as by the use of nitrogen or at least isolated from air.

The catholyte, i.e., the electrolyte in the
20 cathode compartment, is an aqueous solution containing both $\text{NH}_3(\text{aq})$ hereinafter ammonia, and $\text{NH}_4^+(\text{aq})$ hereinafter ammonium. Ammonia is present in sufficient amount such that Co^{+3} and Co^{+2} are both soluble. Preferably, the concentration of ammonia should be from about 1M to 2M and
25 the concentration of ammonium should preferably be in the range of from about 1M to 2M and most preferably equal to the ammonia concentration. Preferred ammonium salts include ammonium sulfate and ammonium carbonate. The pH of the aqueous catholyte should be from about 8 to 12 and
30 preferably from 8.5 to 11. The concentration of Co^{+3} in the catholyte may range from a saturated solution to about 100 ppm and preferably from about 10,000 to 100 ppm.

The anolyte, i.e., the electrolyte in the anode compartment, may be any aqueous solution of a compatible
35 electrolyte material. Typically, the anolyte will be an ammoniacal solution similar to that used in the cathode compartment, as well as aqueous solutions containing other salts such as sodium sulfate, sodium carbonate and the like. Typically, the concentration of salt solutions

should be close to saturation and preferably ranges from about 1 to 2 molar in the anolyte solution.

05 As noted from U.S. Patent Nos. 4,434,141;
4,432,953; 4,152,396; and 4,258,016, which references are
incorporated herein by reference, after the Co^{+3} has been
reduced to Co^{+2} , the Co^{+2} may be extracted from the
10 ammoniacal solution by the use of fluorinated beta-
diketones or alpha-hydroxy oximes. The fluorinated
beta-diketones described in U.S. Patent No. 4,152,396 and
the hydroxy oximes described in U.S. Patent
Nos. 4,434,141; 3,855,090; 3,907,966; and 3,853,725, which
15 patents are hereby incorporated by reference into this
application, are preferred. A particularly preferred
beta-diketone is one sold by Henkel Corporation under the
trade name LIX 51 and a particularly preferred hydroxy
oxime is one also sold by Henkel Corporation under the
trade name LIX 64.

20 The cobalt may be stripped from the organic
extractants by several of any alternatively known prior
art methods. One conventional stripping technique
frequently used is stripping the cobalt values with
sulfuric acid to produce the cobalt sulfate in the aqueous
25 phase. The aqueous solutions containing the stripped
cobalt can be further processed to produce pure metal or
alternatively the salt can be used directly to form a new
catalyst. The cobalt can be electrowon or directly
reduced by hydrogen gas. The aqueous solutions can be
30 used directly as a metal source for impregnating or
co-mulling new catalysts.

 The end point at which the Co^{+3} has been reduced
to Co^{+2} and is ready for solvent extraction is found by
measuring the Eh of the catholyte solution. For a suc-
35 cessful solvent extraction, the catholyte solution has to
be brought by electroreduction to a potential of -50 mv to
-100 mv versus SHE. Typical changes in the solution
potential in the course of electroreduction are shown in
FIG. 2, and the corresponding cobalt extraction values as
40 obtained by subsequent solvent extraction step using

LIX 51 applied to the electroreduced solution are shown in FIG. 3.

05 The present invention is further illustrated by the following examples.

EXAMPLES

Example 1

10 The cell used was of a rectangular side by side type and was constructed of Lucite similar to that shown in FIG. 1. The anode and cathode compartment both had inside dimensions of 400 X 60 X 20 mm. The porous cathode consisted of seven demester pads made of 304 stainless steel mesh and packed together. The cathode had a porosity of 45 percent. A current feeder was positioned on the part of the cathode compartment most remote from the anode and consisted from 304 stainless steel. The anode and cathode compartment were separated by a diaphragm measuring 520 X 150 mm. The anode used was a dimensionally stable anode (DSA) in the form of coated titanium mesh and measured 600 X 60 mm. It was located adjacent and in contact to the diaphragm. Current and total cell voltage were recorded on strip chart recorders. Catholyte and anolyte were supplied to the cell from separate systems consisting of reservoirs and pumps. The diaphragm used in these experiments was "Daramic" supplied by W. R. Grace and typically used as an automotive battery separator. This porous material showed a low electrical resistance (0.8 rcm^2 in 1 molar sodium chloride at 18°C) and due to a very small pore size of 0.1 micron, showed negligible permeability to electrolyte solutions at the pressure differential encountered in this experiment.

25 Four liters of ammoniacal solutions were obtained from pilot plant leach of a spent hydroprocessing catalyst. The solution had the following composition: 35 CO^{+3} , 840 ppm; Ni 66.8 ppm, V 268 ppm; Mo 537 ppm; 2M ammonia, 1M ammonium carbonate, pH 9.8. The anode solution used was 1M sodium sulfate, pH 9.8. The temperature of the solution was 25°C. Both anolyte and catholyte solutions were pumped at 9.25 gallons per minute through 40

01

-10-

the appropriate compartments. A current of 6.5 amps (equivalent to 2.5 amperes per sq. feet of cell cross sectional area) was applied at a cell voltage of 2.65 volts. The electrolysis was carried out for 70 minutes. At the end of the run, the solutions were contacted with LIX-51, a fluorinated beta-diketone supplied Henkel Corporation, and 98.8 percent of the cobalt in solution was extracted and the raffinate from the solvent extraction contained 10 ppm CO^{+3} . The overall current efficiency of the cell was 18 percent (i.e., 82 percent of the current was used by the hydrogen reduction reaction), the energy consumption was 3 kwh/lb. cobalt. No cobalt metal was deposited on the porous cathodes in the course of the run.

Example 2

The cell arrangement was as in Example 1. Four liters of cathode solution were prepared from Fisher reagent material and consisted of 2M ammonia, 1M ammonium carbonate and 1.19 g/l of cobalt (0.96 g/l of CO^{+3} and 0.23 g/l CO^{+2}) at a pH 9.8. The anolyte consisted of 1M sodium sulfate at pH 9.5. Both anolyte and catholyte were pumped at 9.5 gallons per minute through the appropriate compartments. Solution temperature was 23°C and a current of 6.6 amps was applied (equivalent to 25.5 amperes per square feet of cells' cross sectional area) at 2.7 volts. The electrolysis was carried out for 45 minutes. After 5 minutes the cobaltic concentration was reduced to 0.6 g per liter and the cobaltous concentration increased to 0.53 g per liter. After 45 minutes the cobaltic concentration was reduced to 0.01 g per liter, the cobaltous concentration was 0.30 g per liter and a substantial amount of the cobalt deposited on the cathode. About 73.6 percent of the current was used for hydrogen evaluation. The cobalt deposited on the porous cathode was subsequently stripped with 8 liters of "fresh" cobaltic amine solution. The "fresh solution" had the same composition as that of the starting solution. The stripping was carried out for 45 minutes by pumping the "fresh" solution

-11-

through the porous electrode. Cobaltic amine concentration at the end of the run decreased to below 05 0.01 g/l while that of cobaltous amine reached 1.81 g/liter.

These results show that the porous electrode cell is operative even under conditions by which cobalt metal deposits with the electrode and that this metal can 10 be easily removed.

15

20

25

30

35

40

WHAT IS CLAIMED IS:

- 05 1. An electrolytic process for the reduction of
Co⁺³ to Co⁺² in an aqueous ammoniacal solution in an
electrolytic cell, comprising an anode compartment, a
cathode compartment and a permeable membrane in contact
with the anode and located between the anode and cathode
10 compartments and wherein said cathode compartment contains
a porous electrode having a porosity in the range of from
about 30 to 60 percent comprising introducing the aqueous
ammoniacal cobaltic (III) solution into the cathode com-
partment of the electrolytic cell, providing an aqueous
15 electrolyte in the anode compartment, applying direct
current to the anode and cathode to produce cobaltous (II)
ions in the cathode compartment while substantially pre-
venting migration of cobaltous anions between the cathode
and anode compartments by maintaining a permeable membrane
20 between the anode and the porous cathode, removing
produced gas from the anode compartment and removing the
electrolyte containing cobaltous ions from the cathode
compartment.
- 25 2. The process of Claim 1 which comprises
conducting the electrolytic process at a temperature
ranging from 20°C to 50°C.
3. The process of Claim 1 wherein the cathode is a
30 stainless steel mesh.
4. The process of Claim 1 wherein the electrolyte
in the anode compartment is an aqueous solution of sodium
sulfate.
35
5. The process of Claim 1 wherein the electrolyte
in the anode compartment is an aqueous ammoniacal
solution.

6. The process of Claim 1 wherein the electrolyte in the cathode compartment is an aqueous ammonia-ammonium sulfate solution or ammonia-ammonium carbonate solution.
7. The process of Claim 1 wherein the aqueous electrolyte has a pH of from 8.5 to 10.
8. The process of Claim 1 wherein the Eh of the aqueous electrolyte in the cathode compartment is reduced to the range of from -50 mv to -100 mv versus SHE.
9. The process of Claim 1 wherein no cobalt metal is deposited on the porous electrode.
10. The process of Claim 1 which comprises treating the cathode with an aqueous ammoniacal cobaltic (III) solution for a time sufficient to dissolve any cobalt which may have deposited on said cathode.
11. The process of Claim 1 wherein the cathode is in contact with the permeable membrane.
12. The process of Claim 1 wherein the aqueous ammoniacal cobaltic (III) solution is passed over activated carbon prior to introducing said solution into said cathode compartment of the electrolytic cell.

30

35

40

FIG. 1.

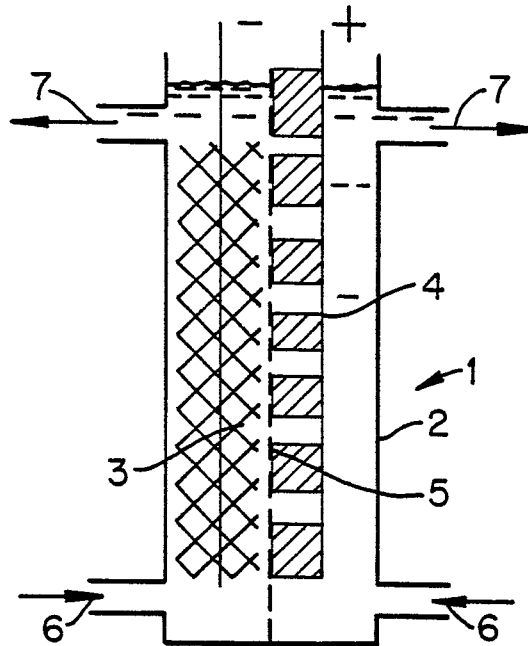


FIG. 2.

CHANGES IN THE OXIDATION POTENTIAL OF THE SOLUTION DURING ELECTROREDUCTION


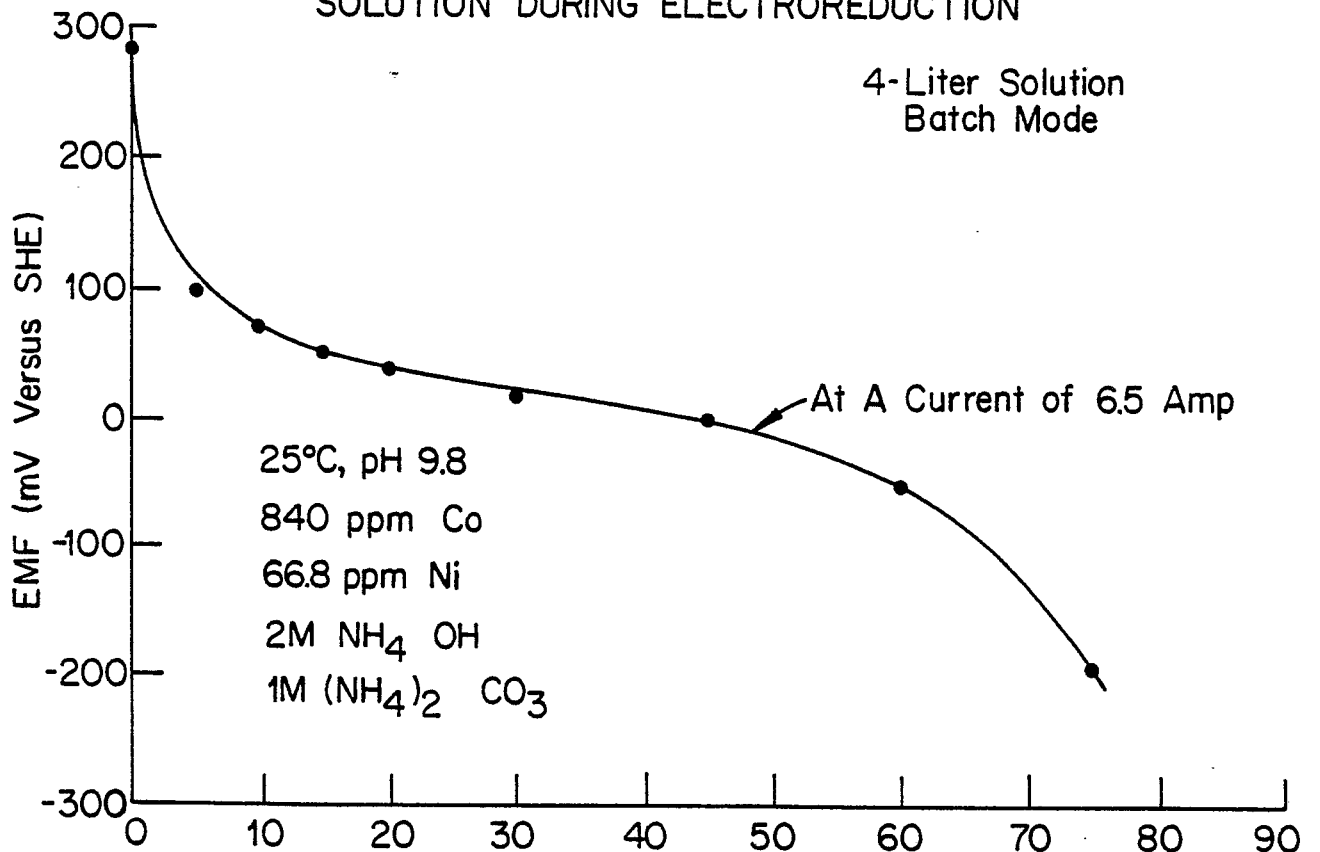


FIG. 3.

**SOLVENT EXTRACTION WITH LIX51 OF
COBALT FROM ELECTROREDUCED SOLUTIONS**

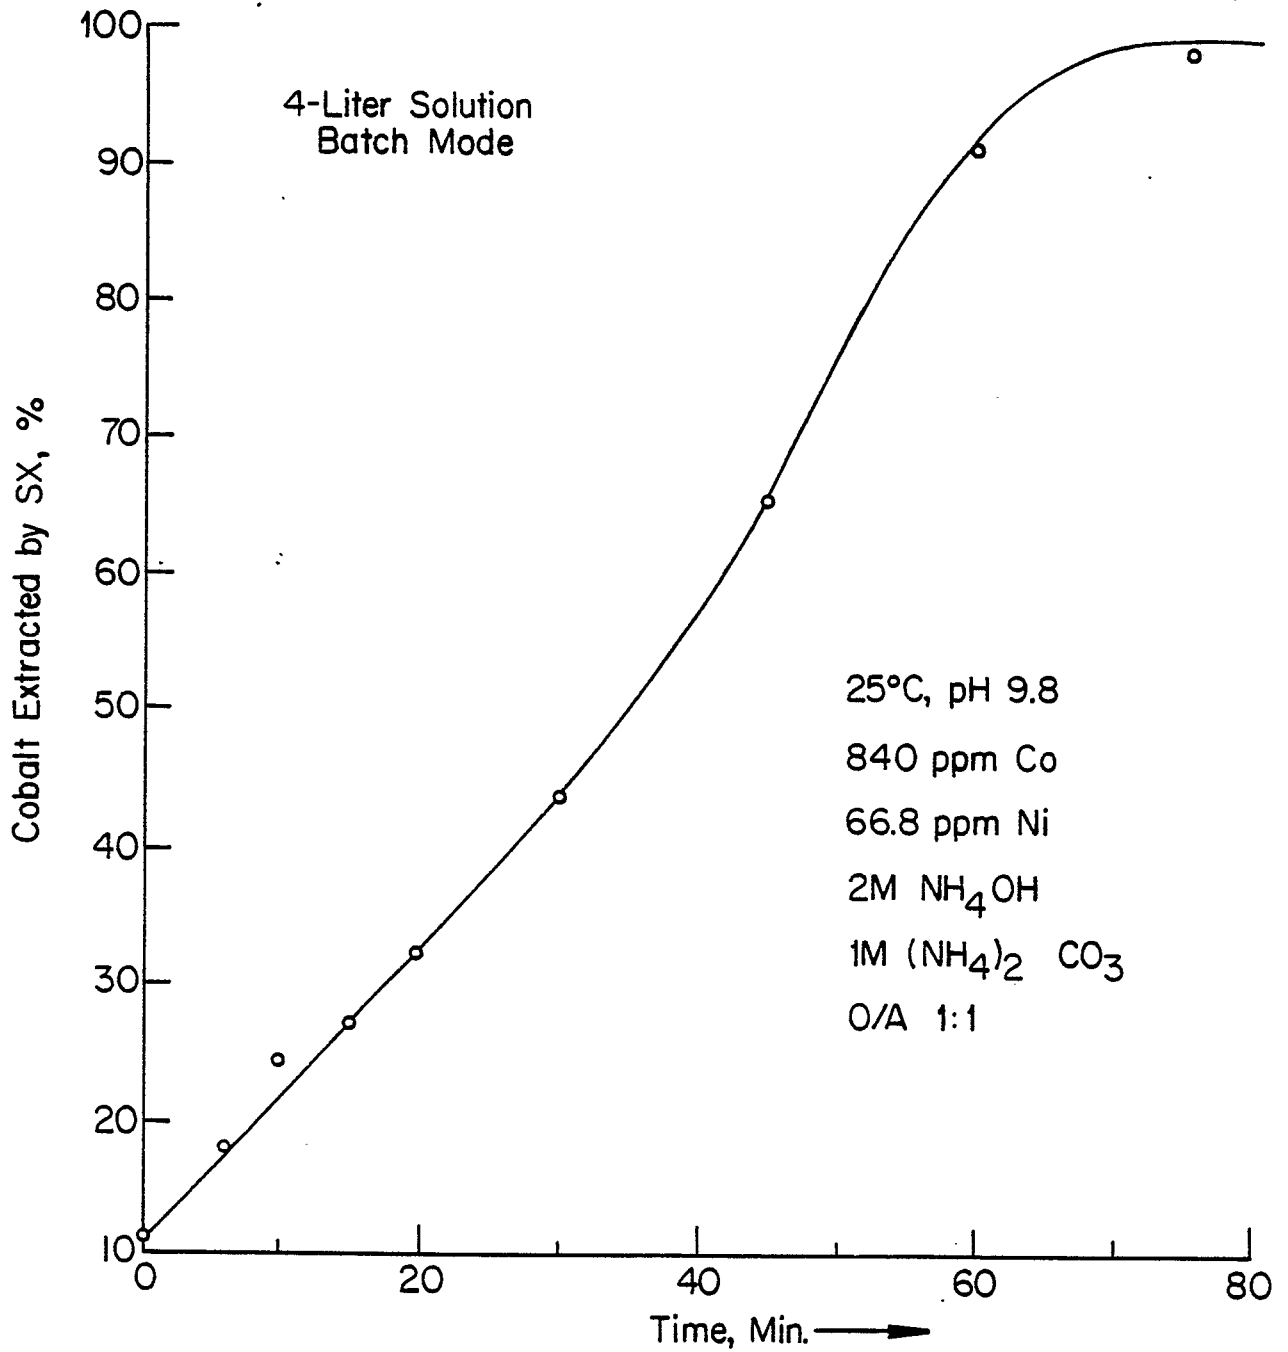

INTERNATIONAL SEARCH REPORT

International Application No PCT/US85/02265

I. CLASSIFICATION OF SUBJECT MATTER (if several classification symbols apply, indicate all) ³		
According to International Patent Classification (IPC) or to both National Classification and IPC		
INT C1 ⁴ C25F 5/00		
U.S. C1 204/130		
II. FIELDS SEARCHED		
Minimum Documentation Searched ⁴		
Classification System	Classification Symbols	
U.S.	204/130	204/112
Documentation Searched other than Minimum Documentation to the Extent that such Documents are Included in the Fields Searched ⁵		
III. DOCUMENTS CONSIDERED TO BE RELEVANT ¹⁴		
Category [*]	Citation of Document, ¹⁶ with indication, where appropriate, of the relevant passages ¹⁷	Relevant to Claim No. ¹⁸
A	U.S. A., 4,256,557 PUBLISHED SUBOROFF ET AL, 17 MARCH 1981	1-12
A	U.S. A., 4,006,067 PUBLISHED GUSSAK 01 FEBRUARY 1977	1-12
A	U.S..A., 4,464,348 PUBLISHED BURBA, III 07 AUGUST 1984	1-12
<p>* Special categories of cited documents: ¹⁵</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.</p> <p>"&" document member of the same patent family</p>		
IV. CERTIFICATION		
Date of the Actual Completion of the International Search ²		Date of Mailing of this International Search Report ²
27 JANUARY 1986		07 FEB 1986
International Searching Authority ¹ ISA/US		Signature of Authorized Officer ²⁰ RICHARD L. ANDREWS <i>Richard L. Andrews</i>