



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification⁶ : B27K 7/00</p>	<p>A1</p>	<p>(11) International Publication Number: WO 99/41050</p> <p>(43) International Publication Date: 19 August 1999 (19.08.99)</p>
<p>(21) International Application Number: PCT/IT98/00133</p> <p>(22) International Filing Date: 26 May 1998 (26.05.98)</p> <p>(30) Priority Data: SS98U000002 16 February 1998 (16.02.98) IT</p> <p>(71)(72) Applicant and Inventor: GRINDI, Anna [IT/IT]; Via Mazzini, 24, I-07023 Calangius (IT).</p> <p>(74) Agents: LEONE, Mario et al.; Società Italiana Brevetti S.p.A., Piazza di Pietra, 39, I-00186 Roma (IT).</p>	<p>(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, GW, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).</p> <p>Published <i>With international search report.</i></p>	
<p>(54) Title: PROCESS FOR TREATING LINENIZED CORK SHEETS</p> <p>(57) Abstract</p> <p>A process for treating linenized cork sheets, employing at least one emollient agent comprising surfactants, allows the obtainment of crease-resisting sheets that can be folded like fabric and comprises the steps of diluting said at least one emollient agent with water, in a predetermined proportion water/emollient agent, obtaining an emollient mixture; preparing an absorbing layer sheet, to be soaked with liquid, and inducing the absorption of said emollient mixture in said layer; putting in contact said soaked layer (1) with a linenized cork sheet (2) at its linenized surface (3), keeping this contact for more than 24 hours.</p>		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakistan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

PROCESS FOR TREATING LINENIZED CORK SHEETS

DESCRIPTION

The present invention refers to a process for treating linenized cork sheets, improving its mechanical and tactile features.

5 As it is well known, cork is obtained from the bark of some trees, in particular the cork oak, without uprooting them. It has some interesting properties such as impermeability, imputrescibility, remarkable elasticity and it is also insulating.

10 For this reason, as well as for its being easy to manufacture, cork can be used in several fields. One of the most common is its reduction in thin sheets that adhere to an adhesive cloth, obtaining linenized cork sheets that can be employed, for example, as wallpaper, upholstery or for suitcases etc.

15 This kind of sheets, which are some tenths of millimeter thick, when folded gets creased, losing most of its pleasant appearance. Furthermore, cork is somehow paper-like rough to the feel.

20 These drawbacks, making cork features more similar to those of paper than to those of fabric, prevent its use in the textile or in the leather fields to replace animal or imitation leather, for example in the manufacturing of shoes, bags or wallets, where a crease-resisting and velvetlike to the feel material is required.

25 Some methods to soften cork, reducing its surface roughness by employing glycerol superficially applied thereto, are known. However, such systems cannot manufacture linenized cork sheets behaving substantially like fabric or leather.

The technical problem at the basis of the present invention is to provide a treating process to avoid the drawbacks cited with reference to the state of the art.

30 Such problem is solved by a process for treating linenized cork sheets employing at least one emollient agent comprising surfactants, including the steps of :

- * diluting said at least one emollient agent with water, in a predetermined proportion water/emollient agent, obtaining a diluted emollient mixture;
- * providing a sheet as absorbing layer, apt to be soaked with liquid, and inducing the absorption of said emollient mixture in said layer; and
- 35 * putting said soaked layer in contact with a linenized cork sheet at its linenized surface, keeping this contact for a period of time having a length greater than 24 hours.

The main advantage of the process according to the present invention lies in the obtainment of crease-resisting linenized cork sheets that can be folded without showing marks or permanent creases. Furthermore, these sheets in their non linenized surface, are velvetlike and pleasant to the feel.

5 For such features, the cork sheets thereby obtained can be employed in dressmaking and leather, as well as in upholstery and wall coating, keeping also the qualities of cork in general intact.

The present invention will be described herebelow according to a present embodiment thereof, given as a non-limiting and outlining example. Reference will be made to the figures in the annexed drawings, wherein:

- 10
- * figure 1 shows a perspective view of a detail of a linenized cork sheet in a step of the process according to the present invention; and
 - * figure 2 shows a front perspective view of a linenized cork sheet in another step of said process.

15 The present treating process is bound to prepare linenized cork sheets to be employed in the common applications for said kind of sheets, i.e. as upholstery or fabric for dressmaking, or also as a leather replacement for the manufacturing of shoes, bags, suitcases, gloves etc., as well as wall paper or similar coatings.

20 The features making cork suitable for these uses lie in its particular cell structure, which has a hexagonal-base prismatic cells, overlapping in lines and generating preferential planes of exfoliation.

Each one of these cells traps a certain amount of air conferring to cork its typical softness and elasticity. Furthermore, cork is waterproof and imputrescible, and for this reason is widespreadly used, for example for bottle corks and crown caps, as well as for upholstery and insulation coating.

25 From the raw cork, selected by people skilled in the art, thin leaves of cork are obtained through veneer cutting machines, being some tenths of millimeter thick, having an extremely reduced porosity and a high compactness, elasticity and resistance to tensile stress.

30 Through a gluing process, which is carried out by pressing at a temperature of 80°C, these leaves are coupled to a supporting material, made of cloth with natural or synthetic yarns, conferring a remarkable resistance to tensile stress to the semimachined product that is the above cited linenized cork sheet.

35 The process according to the invention, for treating the linenized sheets obtained thereby, includes a first step wherein an emollient agent

comprising surfactants is provided.

Such an emollient agent can be for example obtained by mixing a hair conditioner and a fabric softener in an appropriate proportion, because in particular the latter contains the desired quantity of surfactants. Preferably, these surfactants are cationic surfactants and said cationic surfactants are present in the emollient agent in a percentage of no more than 2%.

A proportion serving the purposes ranges from 5:1 to 1:1 and it is preferably equal to about 3:1.

The emollient agent of the present process comprises preferably substances having a chemical affinity with cork, in particular glycerol and emollient lipids.

Preferably, said emollient lipids are natural lipids having an animal or vegetal origin, and comprise, advantageously but not exclusively, vison oil, cocoa oil and aloe extract.

The above mentioned surfactants agents are preferably of the emollient and/or softening type (E type and Sp type).

The above described emollient is diluted with water, preferably with demineralized water having a hardness not greater than 0,5°F.

The dilution, through which an emollient mixture is obtained, occurs with a predetermined water/emollient agent proportion, to give to the mixture the needed emollient properties for linenized cork sheets.

Preferably said proportion ranges from 12:1 to 8:1, in particular equal to about 10:1, however it can vary with the use of concentrated emollient agents, where the proportion of volume between normal emollient agent, as available in retailing shops, and concentrated emollient agent is considered to be about 4:1.

Then, the treating process according to the invention includes a step wherein an absorbing layer sheet, apt to be soaked with liquid and flexible to be put in contact with the linenized sheet that is to be treated. For this reason, the layer has adequate dimensions as to cover an entire sheet that is to be treated.

An absorbing layer serving this purpose is for example a fabric sheet, preferably a thick weft cotton cloth, of the type commonly used as dishcloth.

Obviously, a layer can be obtained by the approaching and/or the overlapping of several fabric sheets.

In the process, the absorption of the emollient mixture in the absorbing layer is induced by immersion in a bath realized with said mixture.

For the absorption of the mixture, and in particular of the emollient agent in the layer to be adequate, the immersion period has a length greater than 1 hour, preferably equal to about 2 hours.

5 Successively the absorbing layer 1 (figure 1), soaked with emollient mixture, is put in contact with the linenized cork sheet 2 at its linenized surface 3, i.e. on that surface of the cork leaves forming the sheet 2, wherein the cloth is glued.

10 According to the process of the present invention, the free surface 4 of the layer 1, i.e. the surface opposite to the surface 5 put in contact with the linenized surface 3 of the sheet 2, is at least partially isolated by limiting the circulation of the atmospheric air thereto.

The isolation can occur by covering said surface 4 by a further layer which is at least partially air-and-water proof.

15 Preferably, the isolation of the free surface 4 of the layer 1 is complete, limiting the circulation of air throughout the surface 4 of the layer 1, and keeping exposed to the atmospheric air only the edges 7 of the layer 1.

20 In parallel with the isolation, the non linenized surface 8 of the cork sheet 2 is advantageously put in contact with an absorbing layer, analogous to the previous one, soaked with emollient mixture.

25 An advantageous system to isolate the free surface 4 and to treat at the same time the non linenized surface 8 in a single operation, is that of rolling up the linenized sheet 2 and the layer forming a roll 8 (figure 2). The winding direction of the roll is such as to keep the layer 1 completely covered, while its edges 7 are exposed at the top and at the bottom of the roll, as well as inside and outside the spire.

According to the present process, the layer 1 is to be kept in contact with the linenized cork sheet 2 for a period of time having a length greater than 24 hours.

30 In the same manner, also the non linenized surface is treated with the soaked layer for the same amount of time and following the same procedure.

Advantageously this period of time has such a length to allow the substantial drying of the absorbing layer by the evaporation of the emollient mixture.

35 In this regard, the roll 9 (figure 2) is vertically placed on top of a support 10 allowing the free circulation of the air and kept in this position in an environment having a relative humidity lower than 50% and at a

temperature comprised between 18° and 23°C.

During the drying, with the progressive increase of concentration of the emollient substances, they are superficially absorbed by the linenized and non linenized surfaces of the cork sheet, while the action of the surfactants increases the penetration and the softening efficiency of the emollient substances.

At the end of the drying, the roll can be unwound, with successive removal of the layer 1 than can be successively used again.

The linenized cork sheet obtained thereby can be substantially used as a fabric or a thin leather, e.g. like alcantara or chamois.

It is soft and velvetlike to the feel on the non linenized surface, and can be folded without crumpling or creasing. Such sheet can be obtained from any kind of cork and any kind of fabric or layer used as supporting cloth.

Depending on the situation, the sheet can be used as coating, wallpaper, upholstery or the like, as fabric, for the manufacturing of even complex and elaborated dresses, as leather, for the manufacturing of leather goods.

Thanks to the intrinsic resistance of the material, , the sheet obtained thereby can undergo any type of textile process typical of fabrics and can even be cleaned in washing machines.

The above described treating process can be subject to variations comprised in the scope of the present invention.

In particular it is possible to employ further covering systems to isolate the free surface of the layer and to keep it in surface contact with the linenized surface, using a further soaked layer to be put in contact with the non linenized surface of the cork sheet.

This measure allows the treating of the linenized and of the non linenized surface with different emollient agents and additives.

Furthermore the evaporation of the emollient mixture can occur in a natural or in a forced way, by directing an air flow generated for instance by fans, against the roll. It is furthermore possible to condition the microclimate of the environment wherein the rolls under treating are stocked.

Another way to slow the evaporation of the emollient mixture is to place the linenized sheet and the layer/s in a highly humid environment.

The treating process according to the invention will be described herebelow according to a present embodiment thereof, given as a non-limiting and outlining example.

EXAMPLE

A linenized cork sheet, being 1.5 m high and 8 m long, underwent the treating process according to the invention.

5 In said sheet, the cork leaves and the supporting cloth are 0.15 mm thick each one. Before the process such sheet has physical features similar to those of linenized paper, therefore being subject to creasing if folded.

10 A hair conditioner and a not concentrated fabric softener, both available in any retailing shop, in a 3:1 proportion are mixed, obtaining an emollient agent containing glycerol, vison oil, cocoa oil, mallow extract, aloe extract, pot-marigold extract and essential oils of officinal herbs, cationic surfactants in a percentage of no more than 2%.

This emollient agent is diluted with demineralized water in a dilution proportion of 10:1 (10 liters of water for 1 liter of emollient agent).

15 The emollient mixture thereby obtained is dipped in a bath wherein a cotton cloth, whose dimensions corresponds to those of the cork sheet to be treated, is immersed.

The cotton cloth is kept in immersion for 2 hours, and after made it adhere to the linenized surface of the cork sheet. The whole is then rolled up forming a 1.5 meter tall roll which is placed vertically (figure 2) on a support
20 allowing the passage of the air.

The roll is kept in a climatized environment, with a humidity lower than 50% and a temperature comprised between 18°C and 21°C.

25 After three days, the fabric sheet used as layer, is completely dry and can be used again, while the cork sheet is fabric- or leather like: velvetlike on the non linenized surface and virtually crease-resisting even if folded several times.

The sheet was put in the washing machine and successively dried several times, and it maintained its features substantially unchanged.

30 With this sheet, and with others obtained following the same procedures, it was possible to manufacture clothing, such as even complicated dresses, and leather goods, wherein fabric and leather were mostly replaced by linenized cork sheets according to the present invention.

35 In order to satisfy particular requirements and contingencies, a person skilled in the art will be able to carry out numerous further modifications and variations, without departing thereby from the protective scope of the invention as defined by the following claims.

CLAIMS

1. Process for treating lined cork sheets employing at least one emollient agent comprising surfactants, including the steps of:

- * diluting said at least one emollient agent with water, in a predetermined proportion water/emollient agent, obtaining a diluted emollient mixture;
- * preparing a sheet as absorbing layer, apt to be soaked with liquid, and inducing the absorption, of said emollient mixture in said layer; and
- * putting said soaked absorbing layer (1) in contact with a lined cork sheet (2) at its lined surface (3), keeping this contact for a period of time having a length greater than 24 hours.

2. Process according to claim 1, wherein the water employed is demineralized water having a hardness not greater than 0,5 °F.

3. Process according to claim 1, wherein said absorbing layer is a fabric sheet.

4. Process according to claim 3, wherein said fabric sheet is realized in thick weft cotton cloth.

5. Process according to claim 3, wherein said absorption is induced by the immersion of the fabric sheet in a bath of said emollient mixture, with a immersion period having a length greater than 1 hour long.

6. Process according to claim 5, wherein said immersion period has a length of about 2 hours.

7. Process according to claim 1, wherein said contact is kept for a period of time having such a length to allow the substantial drying of the absorbing layer by the evaporation of the emollient mixture.

8. Process according to claim 7, wherein, during the drying, the free surface (4) of the soaked absorbing layer (1), opposite to its surface (5) put in contact with the lined surface (3) of the lined cork sheet (2), is at least partially isolated, limiting the circulation of the atmospheric air on said free surface (4).

9. Process according to claim 8, wherein said free surface (4) is completely isolated, keeping the edges (7) of said soaked absorbing layer (1) exposed to the atmospheric air.

10. Process according to any of the previous claims, wherein the non lined surface (8) of the lined cork sheet (2), opposite to said lined surface (3), is as well put in contact with an absorbing layer (1) soaked with said emollient mixture.

11. Process according to claims 9 and 10, wherein said free

surface (4) is isolated by rolling up the linenized cork sheet (2) and the soaked absorbing layer (1), forming thereby a roll (9) and putting said non linenized surface (8) in contact with the soaked absorbing layer (1) at said free surface (3) which is therefore isolated.

5 **12.** Process according to claim 11, wherein said roll (9) is kept in a substantially vertical position, until the absorbing layer (1) is completely dry.

13. Process according to claim 11, wherein the roll (9) is kept in an environment having a relative humidity lower than 50% and a temperature comprised between 16 and 23°C.

10 **14.** Process according to any of the claims from 1 to 13, wherein said surfactants comprise cationic surfactants.

15. Process according to claim 14, wherein said cationic surfactants are present in said at least one emollient agent in a percentage of no more than 2%.

15 **16.** Process according to any of the claims from 1 to 15, wherein said at least one emollient agent comprises glycerol.

17. Process according to claim 16, wherein said at least one emollient agent comprises emollient lipids.

20 **18.** Process according to claim 17, wherein said emollient lipids are natural lipids of vegetal and/or animal origin.

19. Process according to claim 18, wherein said natural lipids comprise vison oil.

20. Process according to claim 18, wherein said natural lipids comprise cocoa oil.



25 **21.** Process according to claim 18, wherein said natural lipids comprise aloe extract.

22. Process according to any of the claims from 14 to 21, wherein said surfactants comprise emollients and/or softening surfactants.

30 **23.** Linenized cork sheet obtained by a treating process according to any of the previous claims.

24. Use of one or more linenized cork sheets, obtained by a treating process according to any of the claims from 1 to 22, as coating and/or wallpaper.

35 **25.** Use of one or more linenized cork sheets, obtained by a treating process according to any of the claims from 1 to 22, in the manufacturing of clothing and/or leather goods.

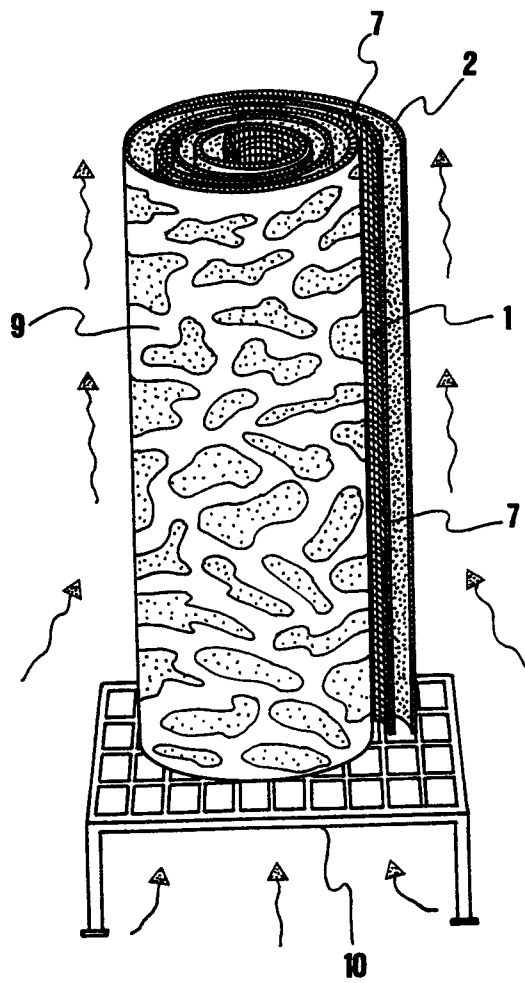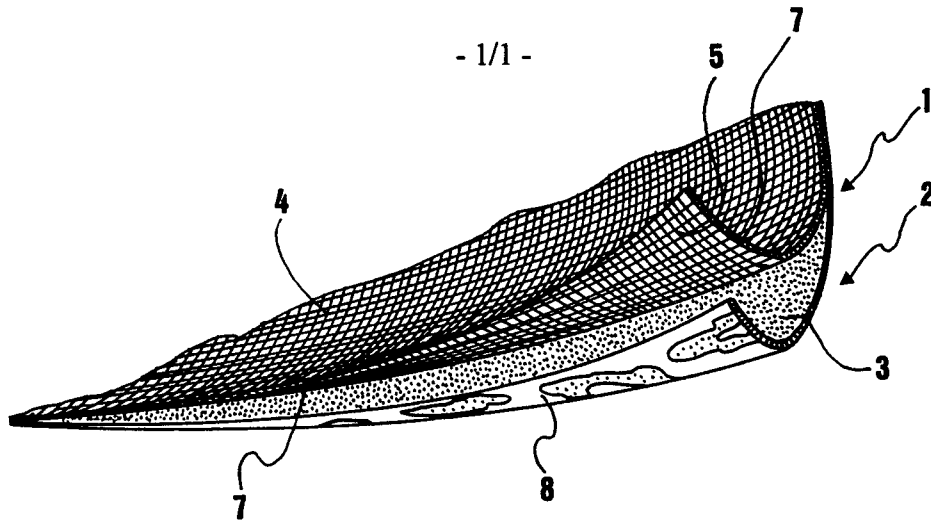

INTERNATIONAL SEARCH REPORT

International Application No

PCT/IT 98/00133

A. CLASSIFICATION OF SUBJECT MATTER IPC 6 B27K7/00		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols) IPC 6 B27K D06N		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practical, search terms used)		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	DATABASE WPI Section Ch, Week 8444 Derwent Publications Ltd., London, GB; Class A93, AN 84-272752 XP002081904 & JP 59 167208 A (MATSUSHITA ELECTRIC WORKS LTD), 20 September 1984 see abstract ---	1
A	US 1 608 243 A (A.L. SHAVOIR) 23 November 1926 ---	
A	DE 42 44 250 A (TESCH GUENTER) 30 June 1994 -----	
<input type="checkbox"/> Further documents are listed in the continuation of box C. <input checked="" type="checkbox"/> Patent family members are listed in annex.		
° Special categories of cited documents :		
"A" document defining the general state of the art which is not considered to be of particular relevance	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention	
"E" earlier document but published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone	
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.	
"O" document referring to an oral disclosure, use, exhibition or other means	"&" document member of the same patent family	
"P" document published prior to the international filing date but later than the priority date claimed		
Date of the actual completion of the international search <p style="text-align: center; font-size: 1.2em;">23 October 1998</p>	Date of mailing of the international search report <p style="text-align: center; font-size: 1.2em;">09/11/1998</p>	
Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016	Authorized officer <p style="text-align: center; font-size: 1.2em;">Dalkafouki, A</p>	

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/IT 98/00133

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 1608243 A	23-11-1926	NONE	
<hr/>			
DE 4244250 A	30-06-1994	AT 162567 T	15-02-1998
		DE 59308045 D	26-02-1998
		WO 9415013 A	07-07-1994
		EP 0628104 A	14-12-1994
<hr/>			