

## DOCUMENT MADE AVAILABLE UNDER THE PATENT COOPERATION TREATY (PCT)

International application number:	<b>PCT/US2011/037647</b>
International filing date:	<b>24 May 2011 (24.05.2011)</b>
Document type:	<b>Certified copy of priority document</b>
Document details:	Country/Office: <b>US</b>
	Number: <b>61/352,617</b>
	Filing date: <b>08 June 2010 (08.06.2010)</b>
Date of receipt at the International Bureau:	<b>03 June 2011 (03.06.2011)</b>

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a),(b) or (b-bis)

371758

**THE UNITED STATES OF AMERICA**

**TO ALL TO WHOM THESE PRESENTS SHALL COME:**

**UNITED STATES DEPARTMENT OF COMMERCE**

**United States Patent and Trademark Office**

*June 02, 2011*

**THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM THE RECORDS OF THE UNITED STATES PATENT AND TRADEMARK OFFICE OF THOSE PAPERS OF THE BELOW IDENTIFIED PATENT APPLICATION THAT MET THE REQUIREMENTS TO BE GRANTED A FILING DATE.**

**APPLICATION NUMBER: 61/352,617**

**FILING DATE: June 08, 2010**

**RELATED PCT APPLICATION NUMBER: PCT/US11/37647**

**THE COUNTRY CODE AND NUMBER OF YOUR PRIORITY APPLICATION, TO BE USED FOR FILING ABROAD UNDER THE PARIS CONVENTION, IS US61/352,617**



Certified by

*David J. Kappas*

Under Secretary of Commerce  
for Intellectual Property  
and Director of the United States  
Patent and Trademark Office

DC11081 PSP1

ABSTRACT

**[0044]** The present invention relates to a hydraulic fluid composition comprising (A) at least one polydiorganosiloxane; (B) a chlorendate diester; and (C) a lubricant compound which is an antimony or lead compound of a dialkyldithiocarbamate or

5 dialkylphosphorodithioate.

## Electronic Acknowledgement Receipt

<b>EFS ID:</b>	7770696
<b>Application Number:</b>	61352617
<b>International Application Number:</b>	
<b>Confirmation Number:</b>	2494
<b>Title of Invention:</b>	Silicone Hydraulic Fluids
<b>First Named Inventor/Applicant Name:</b>	GARY ALLEN MCINTYRE
<b>Customer Number:</b>	00137
<b>Filer:</b>	Patricia Marie Scaduto/Kelly Smith
<b>Filer Authorized By:</b>	Patricia Marie Scaduto
<b>Attorney Docket Number:</b>	DC11081PSP1
<b>Receipt Date:</b>	08-JUN-2010
<b>Filing Date:</b>	
<b>Time Stamp:</b>	16:18:44
<b>Application Type:</b>	Provisional

### Payment information:

Submitted with Payment	yes
Payment Type	Deposit Account
Payment was successfully received in RAM	\$220
RAM confirmation Number	2927
Deposit Account	041520
Authorized User	

The Director of the USPTO is hereby authorized to charge indicated fees and credit any overpayment as follows:

Charge any Additional Fees required under 37 C.F.R. Section 1.16 (National application filing, search, and examination fees)

Charge any Additional Fees required under 37 C.F.R. Section 1.17 (Patent application and reexamination processing fees)

Charge any Additional Fees required under 37 C.F.R. Section 1.19 (Document supply fees)

Charge any Additional Fees required under 37 C.F.R. Section 1.20 (Post Issuance fees)

Charge any Additional Fees required under 37 C.F.R. Section 1.21 (Miscellaneous fees and charges)

**File Listing:**

Document Number	Document Description	File Name	File Size(Bytes)/ Message Digest	Multi Part /.zip	Pages (if appl.)
1	Transmittal of New Application	US20100608_PSP_Cover_Sheet.pdf	41077 301a8fd404bbda55bf39a5cf748bdfd7801e71b	no	2

**Warnings:**

**Information:**

2		US20100608_PSP1_Appl.pdf	91291 08be66dadbaacf928751c9af590eecaaddaefca	yes	16
---	--	--------------------------	--	-----	----

**Multipart Description/PDF files in .zip description**

Document Description	Start	End
Specification	1	11
Claims	12	15
Abstract	16	16

**Warnings:**

**Information:**

3	Fee Worksheet (PTO-875)	fee-info.pdf	29260 0f01e19074ea3b83d11b6e504203304defe39a32c	no	2
---	-------------------------	--------------	--	----	---

**Warnings:**

**Information:**

<b>Total Files Size (in bytes):</b>			161628
-------------------------------------	--	--	--------

**This Acknowledgement Receipt evidences receipt on the noted date by the USPTO of the indicated documents, characterized by the applicant, and including page counts, where applicable. It serves as evidence of receipt similar to a Post Card, as described in MPEP 503.**

**New Applications Under 35 U.S.C. 111**

**If a new application is being filed and the application includes the necessary components for a filing date (see 37 CFR 1.53(b)-(d) and MPEP 506), a Filing Receipt (37 CFR 1.54) will be issued in due course and the date shown on this Acknowledgement Receipt will establish the filing date of the application.**

**National Stage of an International Application under 35 U.S.C. 371**

**If a timely submission to enter the national stage of an international application is compliant with the conditions of 35 U.S.C. 371 and other applicable requirements a Form PCT/DO/EO/903 indicating acceptance of the application as a national stage submission under 35 U.S.C. 371 will be issued in addition to the Filing Receipt, in due course.**

**New International Application Filed with the USPTO as a Receiving Office**

**If a new international application is being filed and the international application includes the necessary components for an international filing date (see PCT Article 11 and MPEP 1810), a Notification of the International Application Number and of the International Filing Date (Form PCT/RO/105) will be issued in due course, subject to prescriptions concerning national security, and the date shown on this Acknowledgement Receipt will establish the international filing date of the application.**

## Silicone Hydraulic Fluids

### CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] None.

### 5 BACKGROUND OF THE INVENTION

[0002] The present invention relates to a hydraulic fluid composition comprising (A) at least one polydiorganosiloxane; (B) a chlorendate diester; and (C) a lubricant compound which is an antimony or lead compound of a dialkyldithiocarbamate or dialkylphosphorodithioate.

10 [0003] Hydraulic systems, in which power is transferred from one place to another, are used extensively in industrial equipment, farm equipment, transportation equipment, and the like. Illustrative of such equipment are lifters, jacks, elevators, mills, presses, and braking, power steering and suspension systems for vehicles.

[0004] High pressures and temperatures, which are frequently present in hydraulic systems, place high demands on the thermal and oxidative stability of the fluid used as the hydraulic medium. In addition, the lubricity of the hydraulic fluid is especially important with hydraulic systems wherein a pump is used to pressurize or move the hydraulic fluid from one place to another.

15 [0005] Polydiorganosiloxanes have been recognized as having exceptional thermal and oxidative stability, compatibility with seal materials, and high viscosity indices, said properties making them potentially useful as hydraulic fluids. Unfortunately, the generally low surface tension of polydiorganosiloxanes tends to cause them to have marginal lubricity on metals. As a result, additives improving the lubricity of polydiorganosiloxanes have been sought.

20 [0006] Although the use of certain silicone materials in hydraulic fluid compositions have been widely accepted, there still exists a need for a silicone hydraulic fluid composition which has better stability to settling at room temperature and at lower and higher temperatures. There is also a need for a hydraulic fluid having improved performance over a wider temperature range and higher oxidation stability.

30

BRIEF SUMMARY OF THE INVENTION

[0007] The present invention relates to a hydraulic fluid composition comprising (A) at least one polydiorganosiloxane; (B) a chlorendate diester; and (C) a lubricant compound which is an antimony or lead compound of a dialkyldithiocarbamate or dialkylphosphorodithioate.

[0008] The present invention further relates to a hydraulic fluid composition comprising (A) at least two polydiorganosiloxanes; (B) a chlorendate diester; and (C) a lubricant compound which is an antimony or lead compound of a dialkyldithiocarbamate or dialkylphosphorodithioate.

[0009] In yet another aspect of the present invention, a method is provided for transmitting power from one place to another place using the polydiorganosiloxane hydraulic fluid compositions of this invention.

[0010] It is an object of the present invention to provide improved polydiorganosiloxane hydraulic fluid compositions. Another object is to provide polydiorganosiloxane hydraulic fluid compositions having good lubricating properties. A further object is to provide a hydraulic fluid which has settling stability over a wide range of temperature. Another object is to provide an improved process for transmitting power from one place to another place via a hydraulic fluid.

DETAILED DESCRIPTION OF THE INVENTION


[0011] The present invention relates to a composition comprising

(A) 2 to 99 parts of at least one polydiorganosiloxane selected from (A1) 0 to 99 parts of a polydiorganosiloxane having a formula  $R'R_2Si-O(Me_2SiO)_wSiR_2R'$  and a viscosity of  $1.00 \times 10^{-6}$  m<sup>2</sup>/second to  $1.00 \times 10^{-4}$  m<sup>2</sup>/second at 25° C and (A2) 0 to 99 parts having a formula  $R'R_2Si-O(Me_2SiO)_x(MeR^aSiO)_ySiR_2R'$  and a viscosity of  $1.00 \times 10^{-5}$  m<sup>2</sup>/second to  $1.00 \times 10^{-4}$  m<sup>2</sup>/second at 25° C, wherein Me represents the methyl radical, each R represents a monovalent radical selected from hydrocarbon radicals containing from 1 to 6 carbon atoms, and halogenated hydrocarbon radicals containing from 1 to 6 carbon atoms, each R' represents a radical selected from R radicals, the hydride radical, and the hydroxy radical, w



has an average value from 1 to 70, x has an average value from 5 to 50, and y has an average value from 0.5 to 6;

(B) 0.9 to 60 parts by weight of a chlorendate diester having the formula  $R''O_2CQCO_2R''$ , wherein  $-O_2C-QCO_2-$  represents the chlorendate residue,

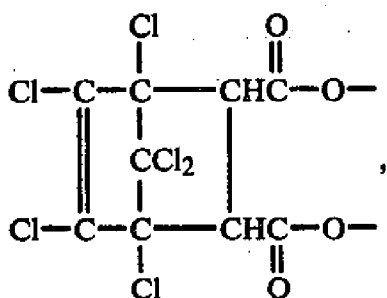

5 and each  $R''$  represents a radical selected from alkyl radicals containing from 4 to 10 carbon atoms and the tetrahydrofurfuryl radical; and

(C) 0.1 to 38 parts by weight of a lubricant compound selected from N,N-dialkyldithiocarbamates of lead and antimony and dialkylphosphorodithioates of lead and antimony, the total parts of (A) plus (B) plus (C) being 100 parts by weight.

10


**[0012]** In another embodiment, the present invention is a composition comprising

(A) 2 to 99 parts of at least two polydiorganosiloxanes selected from (A1) 1 to 99 parts of a polydiorganosiloxane having a formula  $R'R_2Si-O(Me_2SiO)_wSiR_2R'$  and a viscosity of  $1.00 \times 10^{-6}$  m<sup>2</sup>/second to  $1.00 \times 10^{-4}$  m<sup>2</sup>/second at 25° C and (A2) 1 to 99 parts of a polydiorganosiloxane having a formula  $R'R_2Si-O(Me_2SiO)_x(MeR^aSiO)_ySiR_2R'$ , wherein Me represents the methyl radical, each R represents a monovalent radical selected from hydrocarbon radicals containing from 1 to 6 carbon atoms, and halogenated hydrocarbon radicals containing from 1 to 6 carbon atoms, each  $R'$  represents a radical selected from R radicals, the hydride radical, and the hydroxy radical, w has an average value from 1 to 70, x has an average value from 5 to 50, and y has an average value from 0.5 to 6;

15

20

(B) 0.9 to 60 parts by weight of a chlorendate diester having the formula  $R''O_2CQCO_2R''$ , wherein  $-O_2C-QCO_2-$  represents the chlorendate residue,

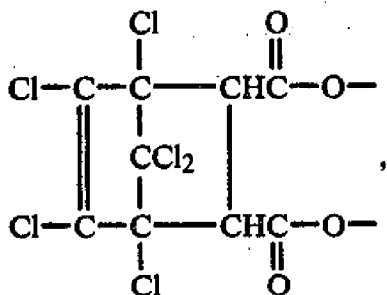

and each R'' represents a radical selected from alkyl radicals containing from 4 to 10 carbon atoms, and the tetrahydrofurfuryl radical; and

- 5 (C) 0.1 to 38 parts by weight of a lubricant compound selected from N,N-dialkyldithiocarbamates of lead and antimony and dialkylphosphorodithioates of lead and antimony, the total parts of (A) plus (B) plus (C) being 100 parts by weight.

[0013] The at least one polydiorganosiloxane, component (A) in the compositions of the present invention is selected from (A1) a polydiorganosiloxane having a formula  $R'R_2Si-O(Me_2SiO)_zSiR_2R'$  and (A2) a polydiorganosiloxane having a formula  $R'R_2Si-O(Me_2SiO)_x(MeR^aSiO)_ySiR_2R'$ , wherein Me represents the methyl radical, each R represents a monovalent radical selected from hydrocarbon radicals containing from 1 to 6 carbon atoms, and halogenated hydrocarbon radicals containing from 1 to 6 carbon atoms, each R' represents a radical selected from R radicals, the hydride radical, and the hydroxy radical, R<sup>a</sup> represents an aryl hydrocarbon radical having from 6 to 10 carbon atoms, w has an average value from 1 to 70, x has an average value from 5 to 50, and y has an average value from 0.5 to 6.

[0014] Examples of suitable R hydrocarbon radicals containing from 1 to 6 carbon atoms include methyl, ethyl, propyl, isobutyl, pentyl, isopentyl, neopentyl, hexyl, vinyl, and allyl. Halogenated hydrocarbon radicals consist of hydrocarbon radicals as hereinabove delineated in which one or more of the hydrogen atoms has been replaced by a halogen atom, such as fluorine, chlorine, or bromine. Examples of halogenated hydrocarbon radicals include chloromethyl, 3 chloropropyl, and 3,3,3 trifluoropropyl. Alternatively, each R is a hydrocarbon radical containing 1 to 4 carbon atoms. Alternatively, each R is methyl .

[0015] R' represents a radical selected from R radicals, the hydride radical, and the hydroxy radical. The R radicals are as described above. Alternatively, each R' is an R radical. Alternatively, each R' is methyl.

5 [0016] Examples of suitable R<sup>a</sup> hydrocarbon radicals containing from 6 to 10 carbon atoms are phenyl, tolyl, mesityl, and naphthyl. Alternatively, each R<sup>a</sup> is phenyl.

[0017] Subscript w of Component (A1) has an average value from 1 to 70, alternatively 3 to 42, alternatively 5 to 35.

10

[0018] Subscript x of Component (A2) has an average value from 5 to 50, alternatively 11 to 43, alternatively 11 to 37.

15 [0019] Subscript y of Component (A2) has an average value from 0.5 to 6, alternatively 3 to 5, alternatively 3 to 4.

[0020] The viscosity of polydiorganosiloxane component (A1) is from  $1.00 \times 10^{-6}$  m<sup>2</sup>/second to  $1.00 \times 10^{-4}$  m<sup>2</sup>/second (1 to 100 centistokes) at 25° C. Alternatively, the viscosity of polydiorganosiloxane component (A1) is from  $2.00 \times 10^{-6}$  m<sup>2</sup>/second to  $5.00 \times 10^{-5}$  m<sup>2</sup>/second at 25° C (2 to 50 centistokes). Alternatively, the viscosity of polydiorganosiloxane component (A1) is from  $5.00 \times 10^{-6}$  m<sup>2</sup>/second to  $3.00 \times 10^{-5}$  m<sup>2</sup>/second at 25° C. (5 to 30 centistokes).

25 [0021] The viscosity of polydiorganosiloxane component (A2) is from  $1.00 \times 10^{-5}$  m<sup>2</sup>/second to  $1.00 \times 10^{-4}$  m<sup>2</sup>/second (10 to 100 centistokes) at 25° C. Alternatively, the viscosity of polydiorganosiloxane component (A2) is from  $2.00 \times 10^{-5}$  m<sup>2</sup>/second to  $7.50 \times 10^{-5}$  m<sup>2</sup>/second at 25° C. (20 to 75 centistokes). Alternatively, the viscosity of polydiorganosiloxane component (A2) is from  $2.00 \times 10^{-5}$  m<sup>2</sup>/second to  $5.00 \times 10^{-5}$  m<sup>2</sup>/second at 25° C. (20 to 50 centistokes)

30


5 [0022] Component (A) may be present in the composition in amounts from 2 to 99 parts based on 100 parts of components (A) plus (B) plus (C). Alternatively, Component (A) is present in amounts from 10 to 97 parts on the same basis. Alternatively, Component (A) is present in amounts from 20 to 96 parts on the same basis. Alternatively, Component (A) is present in amounts from 30 to 95 parts on the same basis. Whether Component (A) is at least one or at least two polydiorganosiloxanes, total parts Component (A) equals parts by weight Component (A1) plus parts by weight Component (A2).

10 [0023] Component (A1) may be present in the composition in amounts from 0 to 99 parts based on 100 parts of components (A) plus (B) plus (C). Alternatively, Component (A1) is present in amounts from 1 to 99 parts on the same basis. Alternatively, Component (A1) is present in amounts from 10 to 67 parts on the same basis. Alternatively, Component (A1) is present in amounts from 20 to 50 parts on the same basis. Alternatively, Component (A1) is present in amounts from 30 to 45 parts on the basis.

15 [0024] Component (A2) may be present in the composition in amounts from 0 to 99 parts based on 100 parts of components (A) plus (B) plus (C). Alternatively, Component (A2) is present in amounts from 1 to 99 parts on the same basis. Alternatively, Component (A2) is present in amounts from 30 to 87 parts on the same basis. Alternatively, Component (A2) is present in amounts from 35 to 76 parts on the same basis. Alternatively, Component (A2) is present in amounts from 50 to 65 parts on the basis.

20 [0025] Suitable methods for synthesis of polydiorganosiloxanes for use as component (A1) and/or (A2) in the compositions of the present invention are well known. Illustrative of  
25 suitable synthetic methods is the cohydrolysis and subsequent condensation of appropriately selected diorganodialkoxysilanes or diorganodichlorosilanes, along with desired amounts of  $R'R_2SiX$  species, wherein  $R'$  and  $R$  are as defined above and  $X$  represents a hydrolyzable group, such as a halo group, such as chloro, fluoro or bromo; or an alkoxy group, such as methoxy, or ethoxy. Another suitable synthetic method is the acid or base catalyzed  
30 equilibration of diorganocyclosiloxanes and an  $R'R_2SiX$  species as defined above.

[0026] The chlorendate diester, component (B) in the compositions of the present invention, has the formula  $R''O_2CQCO_2R''$ , wherein  $-O_2C-QCO_2-$  represents the chlorendate residue:

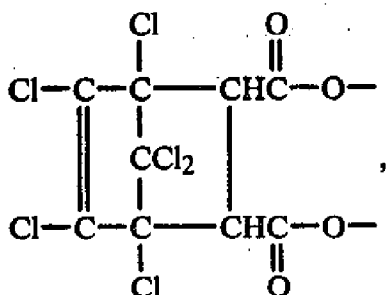


5 and wherein each  $R''$  is independently selected from alkyl radicals containing from 4 to 10 carbon atoms, and the tetrahydrofurfuryl radical. Examples of said alkyl radicals are butyl, pentyl, hexyl, heptyl, octyl, 2-ethylhexyl, nonyl, decyl, and the like. Alternatively, each  $R''$  is butyl or 2-ethylhexyl.

10 [0027] Chlorendate diesters are well-known materials; many are commercially available. The preferred chlorendate diesters are commercially available from, for example, Norquay Technology Chester PA.

15 [0028] Component (B) may be present in the composition in amounts from 0.9 to 60 parts based on 100 parts of components (A) plus (B) plus (C). Alternatively, Component (B) is present in amounts from 3 to 40 parts on the same basis. Alternatively, Component (B) is present in amounts from 3.7 to 30 parts on the same basis. Alternatively, Component (A) is present in amounts from 4.5 to 10 parts on the same basis.

20 [0029] Component (C) in the compositions of the present invention, is selected from the lead and antimony compounds of N,N-dialkyldithiocarbamates and the lead and antimony compounds of dialkyl phosphorodithioates. These compounds have the general formulae:

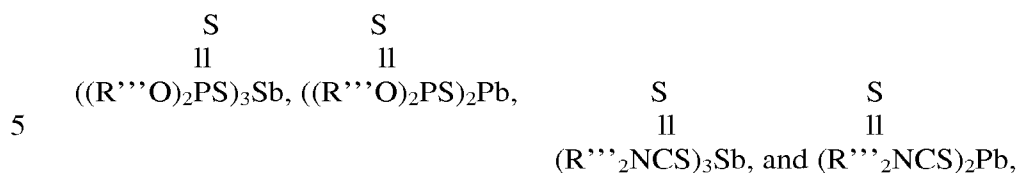

wherein each R''' is independently selected from alkyl radicals having from 3 to 10 carbon atoms. Examples of alkyl radicals having from 3 to 10 carbon atoms include propyl, butyl, 2-ethylhexyl, pentyl, hexyl, heptyl, nonyl, decyl, and the like. Alternatively, each R''' is propyl or 2-ethylhexyl. Alternatively, each R''' is propyl.

**[0030]** The compounds that are used as component (C) in the compositions of the present invention are well-known materials in the lubricant art; many are commercially available. The preferred lubricant compounds are commercially available from, for example, the Vanderbilt Company of Norwalk, CT.

**[0031]** Component (C) may be present in the composition in amounts from 0.1 to 38 parts based on 100 parts of components (A) plus (B) plus (C). Alternatively, Component (C) is present in amounts from 0.2 to 20 parts on the same basis. Alternatively, Component (B) is present in amounts from 0.3 to 15 parts on the same basis. Alternatively, Component (A) is present in amounts from 0.5 to 10 parts on the same basis.

**[0032]** Although the present composition can include other ingredients, in certain embodiments a block copolymer consisting of, on average, at least one block of polydimethylsiloxane covalently bonded through one of its terminal units to a terminal unit of at least one block of polybutadiene or hydrogenated polybutadiene may not be present.

**[0033]** The polydiorganosiloxane hydraulic fluid of the present invention are prepared by mixing appropriately selected quantities of components (A), (B), and (C) together. Mixing can be accomplished by heating said components together, such as heating said components together at a temperature of about 70°C, and holding said components together at that

temperature for a period of time from about 1 minute to about 30 minutes in duration.

Alternatively, mixing can be accomplished by agitation of said components together. For example, said components can be mixed together by means of a high shear mixer, such as an Eppenbach.RTM. mixer. Of course, mixing can be accomplished by heating and agitating.

5 Agitation, with or without heating, is a preferred method for preparation of the polydiorganosiloxane hydraulic fluids of the present invention.

[0034] Small amounts of non-essential components, such as colorants, spray flammability resistance additives, fire retardants, and the viscosity control additives can be added to the  
10 polydiorganosiloxane hydraulic fluid compositions of the present invention. Examples of such non-essential additives include dyes, to make the hydraulic fluid more readily identifiable, and highly brominated compounds to reduce flammability.

[0035] The polydiorganosiloxane hydraulic fluid compositions of the present invention are  
15 stable hydraulic fluids of excellent lubricity. Accordingly, it is a further object of this invention to provide, in a process of transmitting power from one place to another place, the improvement which comprises using as the hydraulic fluid the composition comprising components (A), (B), and (C) as described above. Said process of transmitting power from one place to another place via a hydraulic fluid is accomplished through use of a hydraulic  
20 system.

[0036] While hydraulic systems vary from highly complex control systems to simple presses, they can be characterized as comprising 6 main elements in fluid communication: (1) an hydraulic fluid; (2) a reservoir in which to store said fluid; (3) means to generate pressure  
25 in said fluid, such as a pump or the like; (4) piping, to transmit the generated pressure through said fluid; (5) means to convert said pressure into power at a place removed from the place at which the pressure was generated, such as an hydraulic motor, actuator, cylinder, ram, jack, or the like; and (6) pressure control means, such as control valves, relief valves and the like.

30 [0037] In order to utilize the hydraulic principle, of course, it is necessary for the fluid to be within an enclosed volume able to sustain elevated pressures. Some leakage of fluid is

inevitable, and can be tolerated so long as elevated pressures can be sustained.

[0038] The polydiorganosiloxane hydraulic fluid compositions of the present invention can be used as the hydraulic fluid in a system for transmitting power from one place to another place as hereinabove described. Advantageously, the hydraulic fluid compositions of the present invention can be used as the hydraulic fluid in hydraulic systems wherein the fluid is exposed to extremes of temperature and high pressure.

[0039] The following examples are disclosed to further describe, and teach how to practice, the present invention. These examples are not to be construed as limiting the present invention, which is properly delineated by the appended claims. All parts and percentages are by weight unless otherwise stated. Viscosity values were measured in centistokes at 25°C., and converted to  $m^2$ /second by multiplying by  $1.00 \times 10^{-6} m^2$ /second/centistoke, and rounding the result of said multiplication to three significant figures.

[0040] Test Procedures

[0041] Viscosity was determined by the general procedure set forth in ASTM D-445.

[0042] Lubricity: Lubricity was determined by the general procedure set forth in ASTM D-4172. Standard 1.27 cm (1/2 inch) AISI-E-52100 chrome alloy steel balls were thoroughly cleaned and placed in a Roxana Four Ball Tester with the appropriate amount of fluid to be tested. Testing conditions were: 1200 r.p.m., 40 kg load, 75°C. Testing was one hour in duration. Results of this testing are reported herein as average scar diameter, determined by microscopic examination of the balls at the conclusion of testing. Results are reported in mm, and are reproducible within a range of approximately +/- 0.1%.

#### EXAMPLE 1

[0043] A hydraulic fluid of the present invention was prepared by thoroughly mixing 56 parts of dimethyl, phenylmethyl, trimethyl-terminated siloxane having a viscosity of  $5.00 \times 10^{-5} m^2$ /second measured at 25°C, 37 parts dimethyl, trimethylsiloxy-terminated siloxane having



DC11081 PSP1

a viscosity of  $1.00 \times 10^{-5}$  m<sup>2</sup>/second measured at 25°C, 5.7 parts di-2-ethylhexyl chlorendate (DEHC) and 0.65 parts antimony tris(o,o-dipropylphosphorodithioate). A low shear mixing apparatus such as a KitchenAide Mixer was utilized until the mixture acquired a uniform appearance and no settling was noted. The mixture exhibited an almost clear appearance.

- 5 Components and amounts as well as viscosity and average wear scar diameters are displayed in Table 1.


TABLE I						
Composition, parts						
Example	Di-methyl silicone	Phenyl-methyl silicone	DEHC	Dithiophosphate	Viscosity, m <sup>2</sup> /sec, ASTM D-445	Average scar diameter, mm ASTM D 4172
1	37	56	5.7	0.65	$2.7 \times 10^{-5}$	1.36

That which is claimed is:

1. A composition comprising

5 (A) 2 to 99 parts of at least one polydiorganosiloxane selected from (A1) 0 to 99 parts of a polydiorganosiloxane having a formula  $R'R_2Si-O(Me_2SiO)_wSiR_2R'$  and a viscosity of  $1.00 \times 10^{-6} \text{ m}^2/\text{second}$  to  $1.00 \times 10^{-4} \text{ m}^2/\text{second}$  at  $25^\circ \text{C}$  and (A2) 0 to 99 parts having a formula  $R'R_2Si-O(Me_2SiO)_x(MeR^aSiO)_ySiR_2R'$  and a viscosity of  $1.00 \times 10^{-5} \text{ m}^2/\text{second}$  to  $1.00 \times 10^{-4} \text{ m}^2/\text{second}$  at  $25^\circ \text{C}$ , wherein Me represents the methyl radical, each R represents a monovalent radical selected from hydrocarbon radicals containing from 1 to 6 carbon atoms, and halogenated hydrocarbon radicals containing from 1 to 6 carbon atoms, each R' represents a radical selected from R radicals, the hydride radical, and the hydroxy radical, w has an average value from 1 to 70, x has an average value from 5 to 50, and y has an average value from 0.5 to 6;

15 (B) 0.9 to 60 parts by weight of a chlorendate diester having the formula  $R''O_2CQCO_2R''$ , wherein  $-O_2C-QCO_2-$  represents the chlorendate residue,

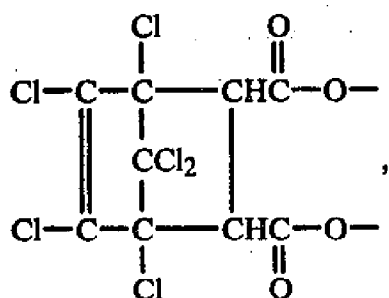

and each R'' represents a radical selected from alkyl radicals containing from 4 to 10 carbon atoms and the tetrahydrofurfuryl radical; and


20 (C) 0.1 to 38 parts by weight of a lubricant compound selected from N,N-dialkyldithiocarbamates of lead and antimony and dialkylphosphorodithioates of lead and antimony, the total parts of (A) plus (B) plus (C) being 100 parts by weight.

2. A composition comprising

25 (A) 2 to 99 parts of at least two polydiorganosiloxanes selected from (A1) 1 to 99 parts of a polydiorganosiloxane having a formula  $R'R_2Si-O(Me_2SiO)_wSiR_2R'$  and a viscosity of  $1.00 \times 10^{-6} \text{ m}^2/\text{second}$  to  $1.00 \times 10^{-4} \text{ m}^2/\text{second}$  at  $25^\circ \text{C}$  and (A2) 1 to 99 parts of a

polydiorganosiloxane having a formula  $R'R_2Si-O(Me_2SiO)_x(MeR^aSiO)_ySiR_2R'$ , wherein Me represents the methyl radical, each R represents a monovalent radical selected from hydrocarbon radicals containing from 1 to 6 carbon atoms, and halogenated hydrocarbon radicals containing from 1 to 6 carbon atoms, each R' represents a radical selected from R radicals, the hydride radical, and the hydroxy radical, w has an average value from 1 to 70, x has an average value from 5 to 50, and y has an average value from 0.5 to 6;

(B) 0.9 to 60 parts by weight of a chlorendate diester having the formula  $R''O_2CQCO_2R''$ , wherein  $-O_2C-QCO_2-$  represents the chlorendate residue,

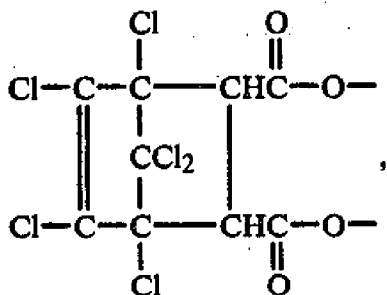

and each R'' represents a radical selected from alkyl radicals containing from 4 to 10 carbon atoms, and the tetrahydrofurfuryl radical; and


(C) 0.1 to 38 parts by weight of a lubricant compound selected from N,N-dialkyldithiocarbamates of lead and antimony and dialkylphosphorodithioates of lead and antimony, the total parts of (A) plus (B) plus (C) being 100 parts by weight.

3. The composition of Claim 1 or 2 where R is methyl, R' is methyl, R<sup>a</sup> is phenyl, R'' is 2-ethylhexyl, R''' is propyl, w has an average value from 3 to 35, x has an average value of from 11 to 37, y has an average value of 3 to 4, 30 to 40 parts of Component (A1) having a viscosity of  $5.00 \times 10^{-6}$  m<sup>2</sup>/second to  $3.00 \times 10^{-5}$  m<sup>2</sup>/second at 25° C, 50 to 60 parts of Component (A2) having a viscosity of  $2.00 \times 10^{-5}$  m<sup>2</sup>/second to  $5.00 \times 10^{-5}$  m<sup>2</sup>/second at 25° C, 4.5 to 10 parts of Component (B), 0.5 to 10 parts of Component (C) where component (C) is a dipropylphosphorodithioate.

4. In a process of transmitting power from one place to another place via a hydraulic fluid, the improvement which comprises using as the hydraulic fluid a composition comprising

(A) 2 to 99 parts of at least one polydiorganosiloxane selected from (A1) 0 to 99 parts of a polydiorganosiloxane having a formula  $R'R_2Si-O(Me_2SiO)_wSiR_2R'$  and a viscosity of  $1.00 \times 10^{-6}$  m<sup>2</sup>/second to  $1.00 \times 10^{-4}$  m<sup>2</sup>/second at 25° C and (A2) 0 to 99 parts having a formula  $R'R_2Si-O(Me_2SiO)_x(MeR^aSiO)_ySiR_2R'$  and a viscosity of  $1.00 \times 10^{-5}$  m<sup>2</sup>/second to  $1.00 \times 10^{-4}$  m<sup>2</sup>/second at 25° C, wherein Me represents the methyl radical, each R represents a monovalent radical selected from hydrocarbon radicals containing from 1 to 6 carbon atoms, and halogenated hydrocarbon radicals containing from 1 to 6 carbon atoms, each R' represents a radical selected from R radicals, the hydride radical, and the hydroxy radical, w has an average value from 1 to 70, x has an average value from 5 to 50, and y has an average value from 0.5 to 6;

(B) 0.9 to 60 parts by weight of a chlorendate diester having the formula  $R''O_2CQCO_2R''$ , wherein  $-O_2C-QCO_2-$  represents the chlorendate residue,

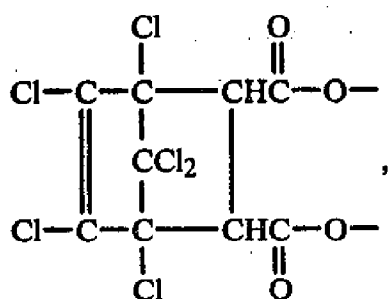

and each R'' represents a radical selected from alkyl radicals containing from 4 to 10 carbon atoms and the tetrahydrofurfuryl radical; and


(C) 0.1 to 38 parts by weight of a lubricant compound selected from N,N-dialkyldithiocarbamates of lead and antimony and dialkylphosphorodithioates of lead and antimony, the total parts of (A) plus (B) plus (C) being 100 parts by weight.

5. In a process of transmitting power from one place to another place via a hydraulic fluid, the improvement which comprises using as the hydraulic fluid a composition comprising

(A) 2 to 99 parts of at least two polydiorganosiloxanes selected from (A1) 1 to 99 parts of a polydiorganosiloxane having a formula  $R'R_2Si-O(Me_2SiO)_wSiR_2R'$  and a viscosity of  $1.00 \times 10^{-6}$  m<sup>2</sup>/second to  $1.00 \times 10^{-4}$  m<sup>2</sup>/second at 25° C and (A2) 1 to 99 parts of a

polydiorganosiloxane having a formula  $R'R_2Si-O(Me_2SiO)_x(MeR^aSiO)_ySiR_2R'$ , wherein Me represents the methyl radical, each R represents a monovalent radical selected from hydrocarbon radicals containing from 1 to 6 carbon atoms, and halogenated hydrocarbon radicals containing from 1 to 6 carbon atoms, each R' represents a radical selected from R radicals, the hydride radical, and the hydroxy radical, w has an average value from 1 to 70, x has an average value from 5 to 50, and y has an average value from 0.5 to 6;

(B) 0.9 to 60 parts by weight of a chlorendate diester having the formula  $R''O_2CQCO_2R''$ , wherein  $-O_2C-QCO_2-$  represents the chlorendate residue,

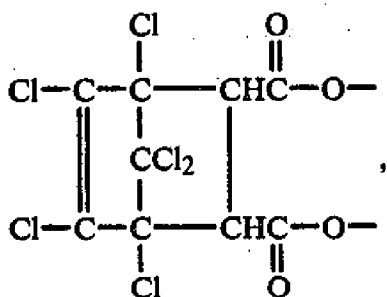

and each R'' represents a radical selected from alkyl radicals containing from 4 to 10 carbon atoms, and the tetrahydrofurfuryl radical; and

(C) 0.1 to 38 parts by weight of a lubricant compound selected from N,N-dialkyldithiocarbamates of lead and antimony and dialkylphosphorodithioates of lead and antimony, the total parts of (A) plus (B) plus (C) being 100 parts by weight.

6. The process of Claim 4 or 5 wherein R is methyl, R' is methyl, R<sup>a</sup> is phenyl, R'' is 2-ethylhexyl, R''' is propyl, w has an average value from 3 to 35, x has an average value of from 11 to 37, y has an average value of 3 to 4, 30 to 40 parts of Component (A1) having a viscosity of  $5.00 \times 10^{-6}$  m<sup>2</sup>/second to  $3.00 \times 10^{-5}$  m<sup>2</sup>/second at 25° C, 50 to 60 parts of Component (A2) having a viscosity of  $2.00 \times 10^{-5}$  m<sup>2</sup>/second to  $5.00 \times 10^{-5}$  m<sup>2</sup>/second at 25° C, 4.5 to 10 parts of Component (B), 0.5 to 10 parts of Component (C) where component (C) is a dipropylphosphorodithioate.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

**PROVISIONAL APPLICATION FOR PATENT COVER SHEET – Page 1 of 2**

This is a request for filing a PROVISIONAL APPLICATION FOR PATENT under 37 CFR 1.53(c).

Express Mail Label No. \_\_\_\_\_

INVENTOR(S)		
Given Name (first and middle [if any])	Family Name or Surname	Residence (City and either State or Foreign Country)
GARY ALLEN	MCINTYRE	BRIGHTON, MICHIGAN USA
Additional inventors are being named on the _____ separately numbered sheets attached hereto.		
TITLE OF THE INVENTION (500 characters max):		
Silicone Hydraulic Fluids		
CORRESPONDENCE ADDRESS		
Direct all correspondence to:		
<input checked="" type="checkbox"/> The address corresponding to Customer Number:	<input type="text" value="00137"/>	
<b>OR</b>		
<input type="checkbox"/> Firm or Individual Name		
Address		
City	State	Zip
Country	Telephone	Email
ENCLOSED APPLICATION PARTS (check all that apply)		
<input type="checkbox"/> Application Data Sheet. See 37 CFR 1.76	<input type="checkbox"/> CD(s), Number of CDs _____	
<input type="checkbox"/> Drawing(s) Number of Sheets _____	<input checked="" type="checkbox"/> Other (specify) <u>4 Page(s) claims; 1 Page abstract</u>	
<input checked="" type="checkbox"/> Specification (e.g. description of the invention) Number of Pages <u>11</u>		
Fees Due: Filing Fee of \$220 (\$110 for small entity). If the specification and drawings exceed 100 sheets of paper, an application size fee is also due, which is \$270 (\$135 for small entity) for each additional 50 sheets or fraction thereof. See 35 U.S.C. 41(a)(1)(G) and 37 CFR 1.16(s).		
METHOD OF PAYMENT OF THE FILING FEE AND APPLICATION SIZE FEE FOR THIS PROVISIONAL APPLICATION FOR PATENT		
<input type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27.		
<input type="checkbox"/> A check or money order made payable to the <i>Director of the United States Patent and Trademark Office</i> is enclosed to cover the filing fee and application size fee (if applicable).	<input type="text" value="200.00"/>	
<input type="checkbox"/> Payment by credit card. Form PTO-2038 is attached.	<b>TOTAL FEE AMOUNT (\$)</b>	
<input checked="" type="checkbox"/> The Director is hereby authorized to charge the filing fee and application size fee (if applicable) or credit any overpayment to Deposit Account Number: <u>04-1520</u> .		

**USE ONLY FOR FILING A PROVISIONAL APPLICATION FOR PATENT**

This collection of information is required by 37 CFR 1.51. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.11 and 1.14. This collection is estimated to take 8 hours to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. **SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.**

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.

**PROVISIONAL APPLICATION COVER SHEET**  
**Page 2 of 2**

PTO/SB/16 (12-08)  
Approved for use through 06/30/2010. OMB 0651-0032  
U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

The invention was made by an agency of the United States Government or under a contract with an agency of the United States Government.

No.

Yes, the name of the U.S. Government agency and the Government contract number are: \_\_\_\_\_

**WARNING:**

Petitioner/applicant is cautioned to avoid submitting personal information in documents filed in a patent application that may contribute to identity theft. Personal information such as social security numbers, bank account numbers, or credit card numbers (other than a check or credit card authorization form PTO-2038 submitted for payment purposes) is never required by the USPTO to support a petition or an application. If this type of personal information is included in documents submitted to the USPTO, petitioners/applicants should consider redacting such personal information from the documents before submitting them to the USPTO. Petitioner/applicant is advised that the record of a patent application is available to the public after publication of the application (unless a non-publication request in compliance with 37 CFR 1.213(a) is made in the application) or issuance of a patent. Furthermore, the record from an abandoned application may also be available to the public if the application is referenced in a published application or an issued patent (see 37 CFR 1.14). Checks and credit card authorization forms PTO-2038 submitted for payment purposes are not retained in the application file and therefore are not publicly available.

SIGNATURE /Patricia M. Scaduto/ Date 06/08/2010

TYPED or PRINTED NAME Patricia M. Scaduto REGISTRATION NO. 39,827  
(if appropriate)

TELEPHONE 989-496-6925 Docket Number: DC11081 PSP1