




- (51) International Patent Classification:
H04B 1/10 (2006.01)
- (21) International Application Number:
PCT/IL2015/000025
- (22) International Filing Date:
13 May 2015 (13.05.2015)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
62/001,045 20 May 2014 (20.05.2014) US
- (71) Applicant: SATIFY LTD. [IL/IL]; 12 HaMda St., Rehovot 7670314 (IL).
- (72) Inventor: RAINISH, Doron; 4 Kish Street, Ramat-Gan 5231282 (IL).
- (74) Agent: INGEL, Gil; Alef. Gimel. - Intellectual Property Consulting Ltd., P.O. Box 2079, Rehovot 7612002 (IL).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))



WO 2015/177779 A1

(54) Title: A METHOD FOR REDUCING INTERFERENCE IN A SATELLITE COMMUNICATIONS NETWORK



FIG.3

(57) Abstract: The present invention provides a method for reducing interference to transmissions, occurring due to other transmissions sent from/to neighboring satellites using same frequencies and/or interference that occur due to other communications transmitted along different satellite's beams using the same frequencies, wherein the method comprises the step of replacing full dummy frames that should be transmitted in a TDM continuous satellite forward channel, by dummy frames' headers with or without a pilot sequence. Also, the dummy frames' headers and the pilot sequence if available, may be transmitted at a reduced power.

**A METHOD FOR REDUCING INTERFERENCE IN A SATELLITE
COMMUNICATIONS NETWORK**

Field of the Disclosure

5 The present disclosure relates to the field of communications and in particular to communications being held between satellites and terminals associated therewith in a satellite communications network.

10 **Background of the Disclosure**

 Interference occurring due to transmissions sent from/to neighbor satellites, using the same frequencies as well as interference occurring due to communications transmitted along satellites beams using the same
15 frequencies, tend to degrade the reception performance and to limit the maximal channel throughput.

 Interference to communications exchanged along satellite links is one of the major factors limiting the capacity of satellite communication. Modern satellites
20 include numerous transponders transmitting at different frequencies, different antennas (single beam or multiple beam), and different polarizations per antenna. Thus, a ground receiver of a satellite link is susceptible to interference that may arise, for example, from co-frequency
25 transmissions at the same frequency, same beam but different polarization (co-frequency, co-beam, cross polarization), same frequency but a different beam (co-frequency, adjacent beam), and adjacent frequency channel from the same or from different beams.

30 As the satellite uplink receiver is also susceptible to interference, interference on the uplink may leak into the desired channel as well. Additionally, unwanted interference

originating from an adjacent satellite may also occur as well as interfering signals from terrestrial sources.

Interference events may be caused by rules violations or errors made by operators. However, the effects of these events might be mitigated due to the newly established Carrier ID standard, which enables a satellite operator or regulators to identify and shut down interfering transmissions. Nevertheless, even links that operate in accordance with the operation rules and regulations may still be a source of interference.

Active interference cancellation means are available. Such means typically involve building a dedicated receiver to capture the interfering signal and then cancel it by subtraction from the wanted signal. Obviously, this technique is rather costly while perfect cancellation is never possible. Even when the interfering signal is known (which is the case when dummy frames are transmitted), cancellation requires synchronization and channel estimation of the interference, which might still require installation of additional circuitry.

A large part of the communication traffic transferred via satellites, is continuous in nature. It includes broadcast transmissions, distribution and contribution links, cellular and Internet connection backhaul traffic etc. The fact that the transmissions are continuous makes it possible to manufacture relatively simple receivers, which are not required to re-acquire and re-synchronize to separate transmission bursts. It also enables the receiver to track the various transmission parameters relatively in a straightforward operation. Hence, satellite communications' standards, such as DVB-S2 and DVB-S2X define a continuous transmission mode of operation in the forward link

(transmissions being sent from the satellite(s) towards the terminals), and define that whenever the (hub) transmitter has no data to transmit, "dummy frames" will be transmitted. These dummy frames contain no information, create
5 interference to adjacent beams and satellites, and as a result increase satellite power consumption.

However, not all of the traffic being exchanged, requires the use of strictly continuous links. Interactive communications for example, are bursty by nature, and an
10 assembly of such links forms links of non-constant rate. Depending on the specific statistics of the link, there is always a difference between the allocated bandwidth of a link, which is typically determined by the difference
15 between the peak information rate for transferring the information to the average information rate that can be supported. The dummy frames, used by the DVB-S2 and DVB-S2X standards, are used in order to compensate for this difference.

20 **Summary of the Disclosure**

Therefore, it is an object of the present invention to provide a method for reducing interference occurring due to transmissions sent from/to neighbor satellites using the same frequencies and/or interference occurring due to
25 communications transmitted along satellites beams using the same frequencies.

It is another object of the present invention to provide a method that relies on peak to average information rate difference, e.g. transmission of dummy frames, for
30 reducing interference to the air interface operation.

Other objects of the present invention will become apparent as the description of the invention proceeds.

According to a first embodiment of the disclosure, a method is provided for reducing interference to transmissions that occur due to other transmissions sent from/to neighboring satellites utilizing the same frequencies and/or interference that occur due to other communications transmitted along different satellites beams using the same frequencies, wherein the method comprises the step of replacing full dummy frames that should be transmitted in a TDM continuous satellite forward channel, with dummy frames' headers.

The term "same frequencies" as used herein throughout the specification and claims is used to denote the exact same frequencies, or frequencies that are sufficiently close to the transmission frequencies, thereby causing interference to the communications transmitted at the transmission frequencies.

According to another embodiment, the method provided further comprising a step of inserting at least one pilot sequence at at least one gap formed when a full dummy frame associated with the dummy frame's header and comprises a respective payload, was replaced by a dummy frame's header.

In accordance with another embodiment, dummy frame's header is transmitted at a reduced power. Also, if at least one pilot sequence has been inserted at the at least one gap formed, it will be transmitted at a reduced power.

By yet another embodiment, the method provided further comprising a step of inserting dummy frames at at least one of the satellite's transmission beams, when there is data available for transmission along that at least one beam.

In accordance with another embodiment of this invention, the timing of the dummy frames is optimized so that the system performance is enhanced (e.g. the system

throughput is increased). To this end, in a multi beam system, the transmitting timing of dummy frames, dummy frames headers or dummy frames headers and pilot signals in each beam, is controlled in such a way that the inter-beam interference is minimized (at the cost of some additional delays). That is, dummy frames would be inserted in transmissions conveyed along a beam, even if this beam's queue is not empty, in order to reduce interference to a certain frame or frames being transmitted along another beam or beams. The decision on whether to insert a dummy frame, and thus delaying transmission of a frame, may depend on that frame time sensitivity or other quality of service parameters associated therewith.

According to prior art protocols, dummy frames are transmitted only when there is no data to send. In accordance with another embodiment of the present invention, dummy frames, dummy frame headers or dummy frames headers and pilot signals are inserted at some of the beams (preferably at those that are less occupied with communications), also when there is data to send in order to reduce interference to other beams, at a cost of delaying the data frames.

According to another aspect of the disclosure, there is provided a receiver configured for use in a satellite communications network, wherein the receiver is configured to receive communications wherein full dummy frames that should have been transmitted in a TDM continuous satellite forward channel, were replaced with dummy frames' headers.

In accordance with another embodiment of this aspect of the disclosure, the receiver is further configured to receive communications in which at least one pilot sequence was inserted at at least one gap formed when a full dummy

frame associated with that dummy frame's header and comprises a respective payload, had been replaced with the dummy frame's header.

5 **Brief description of the drawings**

The present invention will be more fully understood from the following detailed description of the embodiments thereof, taken together with the drawings in which:

10 FIG. 1 - illustrates a prior art transmission sequence of communications in a satellite network;

FIG. 2 - demonstrates one embodiment of the solution provided by the present invention whereby only the header of dummy frames are transmitted together with pilot signals, instead of full dummy frame's payload;

15 FIG. 3 - demonstrates another embodiment of the solution provided by the present invention whereby only the header of dummy frames are transmitted instead of the full dummy frames;

20 FIG. 4A - demonstrates a standard complying system (prior art) where no dummy frames are inserted at any of the beams when there is data to send along these beams; and

25 FIG. 4B - illustrates yet another embodiment of the solution provided by the present invention whereby dummy frames are inserted at some of the beams also at times when there is data to send along these beams.

Detailed Description of the Disclosure

30 In the following description, for the purposes of explanation, numerous specific details are set forth in order to provide a better understanding of the present invention by way of examples. It should be apparent,

however, that the present invention may be practiced without these specific details.

DVB-S2/ DVB-S2X standard (EN 302 307, part I and part II)

5 Dummy frames' insertion is a common practice for all modes of operation of the DVB-S2 and DVB-S2X standard, except for broadcasting with constant coding and modulation (CCM). The standard foresees that inserting dummy frames for obtaining a rate matching between the allocated bandwidth
10 (allocated transmission rate) and the actual transmission rate, is necessary. Dummy frames are inserted when data is not available at the input of the transmitter. A dummy frame is a relatively short frame (having a length of between 3330 to 3510 symbols), which comprises a header of 90 or 180
15 symbols, and 3240 pre-determined symbols instead of data. It may also include 72 symbols of pilots, which are also known symbols transmitted within each frame to facilitate synchronization and channel estimation. A typical DVB-S2/S2X frame varies in size between 3240 to 33720 symbols, and
20 includes a header, data and pilot symbols. The frame size depends on the type of modulation selected, while the actual symbol rate is determined by the allocated bandwidth for the link.

25 **Calculation of expected improvement of link performance**

According to an embodiment of the present disclosure, dummy frames are transmitted while using a reduced transmission power.

30 Let us consider now the link associated with the interfering signal. The operational signal to noise plus interference ratio (SINR) of that link, which is required to decode the data, is higher than that required to acquire and

decode the header and extract synchronization and channel parameters needed for the receiver. Thus, reducing the transmission power for transmitting a dummy frame, and even reducing the power for transmitting dummy symbols down to
 5 zero, would have no adverse effect on the performance of that link. Also, it should be appreciated that avoiding transmission of part of the dummy frame and/or reducing the power at which the dummy frames' headers, the pilot sequence (if available) or both, would require a somewhat different
 10 (more complex) receiver for carrying out the present invention than the typical receiver, commonly used nowadays.

Random Links

Let us now consider a case where a link operates in an
 15 environment of L interfering links, each associated with an average to peak information rate of ρ_l ($\rho \leq 1$), $l=1, \dots, L$. Assuming that all links transmit continuously. The SINR experienced by a link is given by:

$$SINR = \frac{S}{N + \sum_{i=1}^L I_i}$$

20 Where S is the received signal power, N is the noise power and I_l is the interference power received from the l^{th} interfering link. The received signal power, S , is in fact a random variable since the channel may undergo fading, so
 25 $SINR_0$, - the operational SINR, is determined by its statistics, which is measured or taken from ITU-R Recommendation No. P.618 entitled "Propagation data and prediction methods required for the design of Earth-space telecommunication systems", 09/2013.

Now, let us consider a case where power reduction for transmitting dummy frames is implemented. In such a case, a fraction ρ_l of the time, link l will be transmitting in full power and cause interference of I_l to the link of interest, while for $1-\rho_l$ of the time it will transmit with reduced power and the interference caused thereby will be reduced to $\alpha I_l, \alpha < 1$. In other words, the power of interference caused by such a link, may be described as multiplied by a stochastic variable with binomial distribution.

$$\tilde{I}_l = X_l I_l$$

$$\Pr(X_l = x) = \begin{cases} \rho_l & x=1 \\ 1-\rho_l & x=\alpha \end{cases}$$

The total interference is thus given by:

$$\sum_{i=1}^L \tilde{I}_i = \sum_{i=1}^L X_i I_i < \sum_{i=1}^L I_i$$

The total interference is a random variable. Its exact statistics may depend on a number of parameters such as the number of interfering signals, their relative strength, the different average to peak ratio per link, and whether they are correlated (namely, if there is a correlation among dummy frames transmission times). However, similarly to the approach taken while considering the signal fluctuations, one can measure or estimate the margin required, when considering also the fact that the interference is reduced.

Controlled Links

In case where all links are controlled by a central entity, (e.g. a scheduler), the stochastic process described hereinabove may be made more deterministic, and in this case, some maximal interference level may be ensured with high probability. For that purpose, the scheduler will

transmit dummy frames (reduced power, header and pilots only) instead of frames which, according to their QoS requirement, can be delayed.

FIG. 1 illustrates a prior art transmission sequence of communications in a satellite network, where full dummy frames are transmitted between communication frames, when data is not available at the ingress of the transmitter. The purpose of inserting these dummy frames is to achieve a rate matching between the allocated bandwidth for transmission and the actual transmission rate.

FIG. 2 illustrates a non-limiting example of a transmission method construed in accordance with the present invention, whereby only the header of dummy frames are transmitted together with pilot signals instead of the full dummy frame's payload. In the example illustrated in this FIG. 2, two pilot signals are inserted during the interval at which the dummy frame's payload would have been transmitted if the prior art protocol illustrated in FIG. 1, were to be followed).

FIG. 3 demonstrates another embodiment of the solution provided by the present invention whereby only the header of dummy frames are transmitted, instead of the full dummy frames.

FIG. 4B illustrates yet another embodiment of the solution provided by the present invention whereby dummy frames are inserted at some of the beams also at times when there is data to send along these beams, as opposed to a standard complying system illustrated at FIG. 4A, wherein no dummy frames are inserted at any of the beams at times when there is data to send along these beams.

The present invention has been described using detailed descriptions of embodiments thereof that are provided by way

of example and are not intended to limit the scope of the invention in any way. The described embodiments comprise different features, not all of which are required in all embodiments of the invention. Some embodiments of the present invention utilize only some of the features or possible combinations of the features.

Variations of embodiments of the present invention that are described and embodiments of the present invention comprising different combinations of features noted in the described embodiments will occur to persons of the art. The scope of the invention is limited only by the following claims.

Claims

1. A method for reducing interference to transmissions, occurring due to other transmissions sent from/to neighboring satellites using same frequencies and/or interference that occur due to other communications transmitted along different satellite's beams using the same frequencies, wherein said method comprises the step of replacing full dummy frames that should be transmitted in a TDM continuous satellite forward channel, by dummy frames' headers.
2. The method according to claim 1, further comprising a step of inserting at least one pilot sequence at at least one gap formed when a full dummy frame associated with said dummy frame's header and comprises a respective payload, was replaced with a dummy frame's header.
3. The method according to claim 1, wherein said dummy frame's header is transmitted at a reduced power.
4. The method according to claim 2, wherein said at least one pilot sequence is transmitted at a reduced power.
5. The method according to claim 1, further comprising a step of inserting dummy frames at at least one of the satellite's transmission beams, when there is data available for transmission along that at least one beam.
6. A receiver configured for use in a satellite communications network, wherein said receiver is operative to receive communications wherein full dummy frames that

should have been transmitted in a TDM continuous satellite forward channel were replaced with dummy frames' headers.

7. The receiver according to claim 6, wherein said
5 receiver is further configured to receive communications in which at least one pilot sequence was inserted at at least one gap formed when a full dummy frame associated with said dummy frame's header and comprises a respective payload, had been replaced with the dummy frame's header.

10

1/1




FIG.1
PRIOR ART






FIG.2



FIG.3

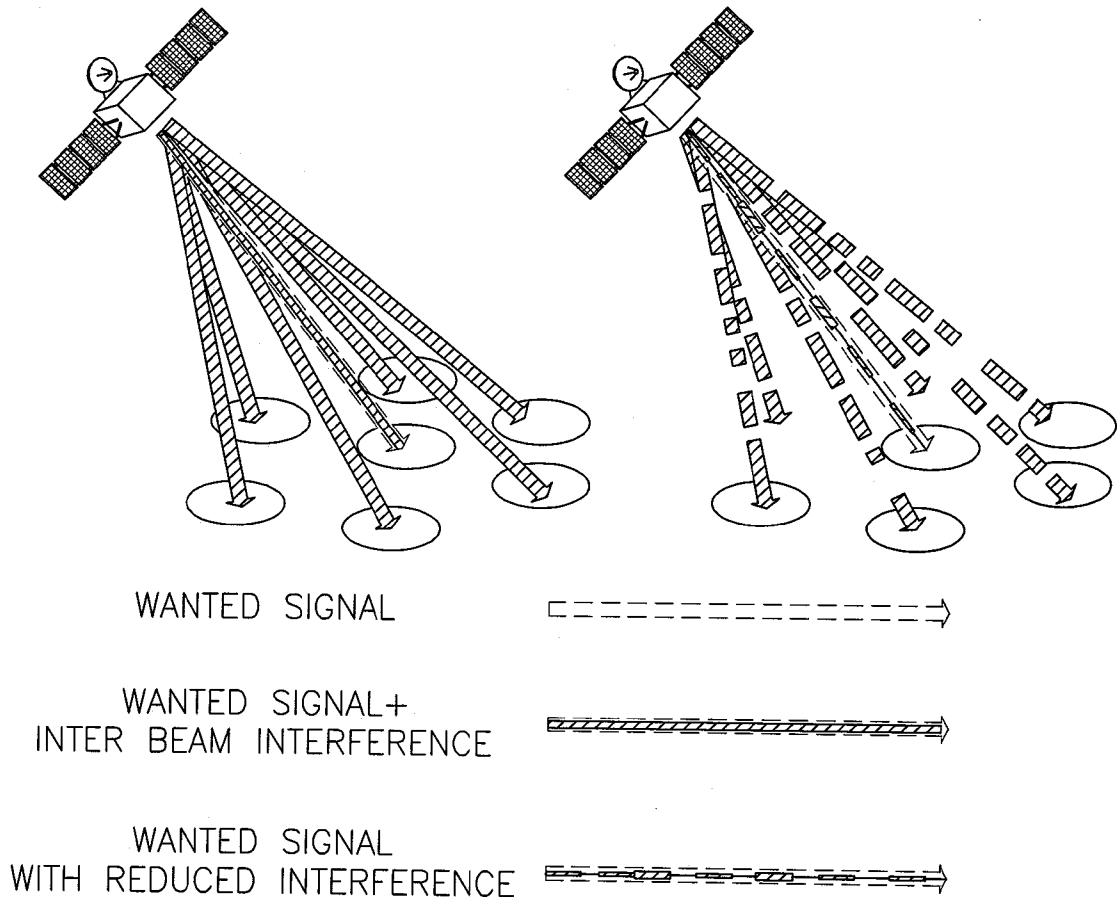

WANTED SIGNAL



WANTED SIGNAL +
INTER BEAM INTERFERENCE



WANTED SIGNAL
WITH REDUCED INTERFERENCE




FIG.4A
PRIOR ART

FIG.4B

INTERNATIONAL SEARCH REPORT

International application No.

PCT/IL2015/000025

A. CLASSIFICATION OF SUBJECT MATTER IPC (2015.01) H04B 1/10		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols) IPC (2015.01) H04B 1/10		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) Databases consulted: THOMSON INNOVATION, Esp@cenet, Google Patents		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO 2013/127688 A2 FRAUNHOFER GES FORSCHUNG 06 Sep 2013 (2013/09/06) The whole reference	1-7
Y	US 6504855 B1 MATSUNAGA OSAMU 07 Jan 2003 (2003/01/07) The whole reference	1-7
<input type="checkbox"/> Further documents are listed in the continuation of Box C. <input checked="" type="checkbox"/> See patent family annex.		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search 30 Aug 2015		Date of mailing of the international search report 30 Aug 2015
Name and mailing address of the ISA: Israel Patent Office Technology Park, Bldg.5, Malcha, Jerusalem, 9695101, Israel Facsimile No. 972-2-5651616		Authorized officer DAVIDI Ariel Telephone No. 972-2-5651727

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/IL2015/000025

Patent document cited search report	Publication date	Patent family member(s)	Publication Date
WO 2013127688 A2	06 Sep 2013	WO 2013127688 A2	06 Sep 2013
		WO 2013127688 A3	24 Oct 2013
		EP 2634923 A1	04 Sep 2013
		EP 2820764 A2	07 Jan 2015
		US 2014369450 A1	18 Dec 2014
<hr/>			
US 6504855 B1	07 Jan 2003	US 6504855 B1	07 Jan 2003
		CN 1236265 A	24 Nov 1999
		EP 0923253 A2	16 Jun 1999
		EP 0923253 A3	02 May 2003
		JP H11177520 A	02 Jul 1999
<hr/>			