

DOCUMENT MADE AVAILABLE UNDER THE PATENT COOPERATION TREATY (PCT)

International application number:	PCT/US2016/019693
International filing date:	26 February 2016 (26.02.2016)
Document type:	Certified copy of priority document
Document details:	Country/Office: US
	Number: 62/129,426
	Filing date: 06 March 2015 (06.03.2015)
Date of receipt at the International Bureau:	07 March 2016 (07.03.2016)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a),(b) or (b-bis)

764960



THE UNITED STATES OF AMERICA

TO ALL TO WHOM THESE PRESENTS SHALL COME:

UNITED STATES DEPARTMENT OF COMMERCE

United States Patent and Trademark Office

March 06, 2016

THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM THE RECORDS OF THE UNITED STATES PATENT AND TRADEMARK OFFICE OF THOSE PAPERS OF THE BELOW IDENTIFIED PATENT APPLICATION THAT MET THE REQUIREMENTS TO BE GRANTED A FILING DATE.

APPLICATION NUMBER: 62/129,426

FILING DATE: *March 06, 2015*

RELATED PCT APPLICATION NUMBER: *PCT/US16/19693*

THE COUNTRY CODE AND NUMBER OF YOUR PRIORITY APPLICATION, TO BE USED FOR FILING ABROAD UNDER THE PARIS CONVENTION, IS *US62/129,426*



Certified by

Under Secretary of Commerce
for Intellectual Property
and Director of the United States
Patent and Trademark Office

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

Application Data Sheet 37 CFR 1.76		Attorney Docket Number	FQI-127P
		Application Number	
Title of Invention	RADIAL FLOW PROCESSOR AND METHOD FOR USING SAME		
The application data sheet is part of the provisional or nonprovisional application for which it is being submitted. The following form contains the bibliographic data arranged in a format specified by the United States Patent and Trademark Office as outlined in 37 CFR 1.76. This document may be completed electronically and submitted to the Office in electronic format using the Electronic Filing System (EFS) or the document may be printed and included in a paper filed application.			

Secrecy Order 37 CFR 5.2

Portions or all of the application associated with this Application Data Sheet may fall under a Secrecy Order pursuant to 37 CFR 5.2 (Paper filers only. Applications that fall under Secrecy Order may not be filed electronically.)

Applicant Information:

Applicant 1					<input type="button" value="Remove"/>
Applicant Authority <input checked="" type="radio"/> Inventor		<input type="radio"/> Legal Representative under 35 U.S.C. 117		<input type="radio"/> Party of Interest under 35 U.S.C. 118	
Prefix	Given Name	Middle Name	Family Name	Suffix	
Mr.	Allison		Sprague		
Residence Information (Select One) <input checked="" type="radio"/> US Residency <input type="radio"/> Non US Residency <input type="radio"/> Active US Military Service					
City		State/Province		Country of Residence i	
Citizenship under 37 CFR 1.41(b) i		CA			
Mailing Address of Applicant:					
Address 1	2460 Second Concession				
Address 2	RR1				
City	Prescott	State/Province	ON		
Postal Code	K0E 1T0	Countryi	CA		
All Inventors Must Be Listed - Additional Inventor Information blocks may be generated within this form by selecting the Add button.					<input type="button" value="Add"/>

Correspondence Information:

Enter either Customer Number or complete the Correspondence Information section below. For further information see 37 CFR 1.33(a).			
<input type="checkbox"/> An Address is being provided for the correspondence information of this application.			
Customer Number	26875		
Email Address	USPTODOCK@whe-law.com	<input type="button" value="Add Email"/>	<input type="button" value="Remove Email"/>

Application Information:

Title of the Invention	RADIAL FLOW PROCESSOR AND METHOD FOR USING SAME		
Attorney Docket Number	FQI-127P	Small Entity Status Claimed	<input checked="" type="checkbox"/>
Application Type	Provisional		
Subject Matter	Utility		
Suggested Class (if any)		Sub Class (if any)	
Suggested Technology Center (if any)	N/A		
Total Number of Drawing Sheets (if any)	3	Suggested Figure for Publication (if any)	

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

Application Data Sheet 37 CFR 1.76	Attorney Docket Number	FQI-127P
	Application Number	
Title of Invention	RADIAL FLOW PROCESSOR AND METHOD FOR USING SAME	

Publication Information:

<input type="checkbox"/>	Request Early Publication (Fee required at time of Request 37 CFR 1.219)
<input type="checkbox"/>	Request Not to Publish. I hereby request that the attached application not be published under 35 U.S.C. 122(b) and certify that the invention disclosed in the attached application has not and will not be the subject of an application filed in another country, or under a multilateral international agreement, that requires publication at eighteen months after filing.

Representative Information:

Representative information should be provided for all practitioners having a power of attorney in the application. Providing this information in the Application Data Sheet does not constitute a power of attorney in the application (see 37 CFR 1.32). Enter either Customer Number or complete the Representative Name section below. If both sections are completed the Customer Number will be used for the Representative Information during processing.

Please Select One:	<input checked="" type="radio"/> Customer Number	<input type="radio"/> US Patent Practitioner	<input type="radio"/> Limited Recognition (37 CFR 11.9)
Customer Number	26875		

Domestic Benefit/National Stage Information:

This section allows for the applicant to either claim benefit under 35 U.S.C. 119(e), 120, 121, or 365(c) or indicate National Stage entry from a PCT application. Providing this information in the application data sheet constitutes the specific reference required by 35 U.S.C. 119(e) or 120, and 37 CFR 1.78(a)(2) or CFR 1.78(a)(4), and need not otherwise be made part of the specification.

Prior Application Status			<input type="button" value="Remove"/>
Application Number	Continuity Type	Prior Application Number	Filing Date (YYYY-MM-DD)

Additional Domestic Benefit/National Stage Data may be generated within this form by selecting the **Add** button.

Foreign Priority Information:

This section allows for the applicant to claim benefit of foreign priority and to identify any prior foreign application for which priority is not claimed. Providing this information in the application data sheet constitutes the claim for priority as required by 35 U.S.C. 119(b) and 37 CFR 1.55(a).

			<input type="button" value="Remove"/>
Application Number	Country ⁱ	Parent Filing Date (YYYY-MM-DD)	Priority Claimed
			<input type="radio"/> Yes <input type="radio"/> No

Additional Foreign Priority Data may be generated within this form by selecting the **Add** button.

Assignee Information:

Providing this information in the application data sheet does not substitute for compliance with any requirement of part 3 of Title 37 of the CFR to have an assignment recorded in the Office.

Assignee 1	<input type="button" value="Remove"/>
------------	---------------------------------------

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

Application Data Sheet 37 CFR 1.76	Attorney Docket Number	FQI-127P
	Application Number	
Title of Invention	RADIAL FLOW PROCESSOR AND METHOD FOR USING SAME	

If the Assignee is an Organization check here. <input checked="" type="checkbox"/>			
Organization Name	Fluid-Quip, Inc.		
Mailing Address Information:			
Address 1	1940 South Yellow Springs Street		
Address 2			
City	Springfield	State/Province	OH
Country	US	Postal Code	45506
Phone Number		Fax Number	
Email Address			
Additional Assignee Data may be generated within this form by selecting the Add button.			<input type="button" value="Add"/>

Signature:

A signature of the applicant or representative is required in accordance with 37 CFR 1.33 and 10.18. Please see 37 CFR 1.4(d) for the form of the signature.					
Signature	/Steven W. Benintendi/		Date (YYYY-MM-DD)	2015-03-06	
First Name	Steven	Last Name	Benintendi	Registration Number	56297

This collection of information is required by 37 CFR 1.76. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 23 minutes to complete, including gathering, preparing, and submitting the completed application data sheet form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. **SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.**

Privacy Act Statement

The Privacy Act of 1974 (P.L. 93-579) requires that you be given certain information in connection with your submission of the attached form related to a patent application or patent. Accordingly, pursuant to the requirements of the Act, please be advised that: (1) the general authority for the collection of this information is 35 U.S.C. 2(b)(2); (2) furnishing of the information solicited is voluntary; and (3) the principal purpose for which the information is used by the U.S. Patent and Trademark Office is to process and/or examine your submission related to a patent application or patent. If you do not furnish the requested information, the U.S. Patent and Trademark Office may not be able to process and/or examine your submission, which may result in termination of proceedings or abandonment of the application or expiration of the patent.

The information provided by you in this form will be subject to the following routine uses:

1. The information on this form will be treated confidentially to the extent allowed under the Freedom of Information Act (5 U.S.C. 552) and the Privacy Act (5 U.S.C. 552a). Records from this system of records may be disclosed to the Department of Justice to determine whether the Freedom of Information Act requires disclosure of these records.
2. A record from this system of records may be disclosed, as a routine use, in the course of presenting evidence to a court, magistrate, or administrative tribunal, including disclosures to opposing counsel in the course of settlement negotiations.
3. A record in this system of records may be disclosed, as a routine use, to a Member of Congress submitting a request involving an individual, to whom the record pertains, when the individual has requested assistance from the Member with respect to the subject matter of the record.
4. A record in this system of records may be disclosed, as a routine use, to a contractor of the Agency having need for the information in order to perform a contract. Recipients of information shall be required to comply with the requirements of the Privacy Act of 1974, as amended, pursuant to 5 U.S.C. 552a(m).
5. A record related to an International Application filed under the Patent Cooperation Treaty in this system of records may be disclosed, as a routine use, to the International Bureau of the World Intellectual Property Organization, pursuant to the Patent Cooperation Treaty.
6. A record in this system of records may be disclosed, as a routine use, to another federal agency for purposes of National Security review (35 U.S.C. 181) and for review pursuant to the Atomic Energy Act (42 U.S.C. 218(c)).
7. A record from this system of records may be disclosed, as a routine use, to the Administrator, General Services, or his/her designee, during an inspection of records conducted by GSA as part of that agency's responsibility to recommend improvements in records management practices and programs, under authority of 44 U.S.C. 2904 and 2906. Such disclosure shall be made in accordance with the GSA regulations governing inspection of records for this purpose, and any other relevant (i.e., GSA or Commerce) directive. Such disclosure shall not be used to make determinations about individuals.
8. A record from this system of records may be disclosed, as a routine use, to the public after either publication of the application pursuant to 35 U.S.C. 122(b) or issuance of a patent pursuant to 35 U.S.C. 151. Further, a record may be disclosed, subject to the limitations of 37 CFR 1.14, as a routine use, to the public if the record was filed in an application which became abandoned or in which the proceedings were terminated and which application is referenced by either a published application, an application open to public inspections or an issued patent.
9. A record from this system of records may be disclosed, as a routine use, to a Federal, State, or local law enforcement agency, if the USPTO becomes aware of a violation or potential violation of law or regulation.

RADIAL FLOW PROCESSOR AND METHOD FOR USING SAME

Technical Field

[0001] The invention relates to a liquid treatment apparatus for treating a liquid medium and, more particularly, to an apparatus and method for enhancing reaction rates for diffusion-controlled chemical reactions.

Background

[0002] Many industrial processes rely on various chemical reactions in a liquid medium to achieve a certain end product. Accordingly, manufacturers and others that perform these industrial processes continually seek improvements to these processes so as to improve their efficiency and provide a cost benefit. By way of example, increasing the collision frequency in chemical reactions occurring in a liquid medium may result in a decrease in processing time, which may lead to an increase in overall production and decrease in operating costs, and/or a decrease in chemical consumption in the liquid medium for achieving the desired result which may also reduce operating costs. Increasing collision frequency via increasing shear rates may also serve to increase surface area of weakly bonded particulate matter and/or flocs. These are only exemplary and, depending on the specific application, many other benefits may be gained by increasing shear rates.

[0003] As an example, two types of industrial applications that may benefit from increased diffusion rates are reactions involving catalysts and enzymes.

[0004] Current static mixers do not sufficiently utilize available energy to optimize shear rates in order to enhance reactions. For example, static mixers sold under the

trademark Kenics do not effectively generate a thin liquid film while maintaining laminar flow and increasing acceleration, such that these mixers do not provide optimized shear rates. Therefore, a need exists for a liquid flow processor which enhances reactions by optimizing shear rates.

Brief Description of the Drawings

[0005] Fig. 1 is a cross sectional view of an exemplary radial flow processor in accordance with the principles of the present invention.

[0006] Fig. 1A is a cross sectional view of the radial flow processor shown in Fig. 1 taken along line 1A—1A.

[0007] Fig. 2 is a cross sectional view of an alternative exemplary radial flow processor in accordance with the principles of the present invention.

[0008] Fig. 3 is a cross sectional view of an alternative exemplary radial flow processor in accordance with the principles of the present invention.

[0009] Fig. 4A is a schematic illustration of a single-pass flow configuration in accordance with the principles of the present invention.

[0010] Fig. 4B is a schematic illustration of a recirculation loop flow configuration in accordance with the principles of the present invention.

Detailed Description

[0011] When a liquid is subjected to shear, the large eddies initially formed subsequently break down into somewhat smaller eddies which in turn break down into

successively smaller eddies in an energy cascade. The rate of kinetic energy dissipation due to shear is directly proportional to the cube of the initial velocity and inversely proportional to a characteristic dimension such as flow channel diameter or film thickness/depth of flow. If U_0 equals the average flow velocity and L_0 equals the characteristic dimension, then the energy dissipation rate may be approximated as $\varepsilon \sim U_0^3/L_0$. Thus, with regards to the characteristic dimension, for a given flow velocity, reducing the characteristic dimension increases the energy dissipation rate, which may then increase the collision frequency.

[0012] For open channel flow over a flat surface, as U_0 becomes greater or as L_0 becomes smaller, the flow regime has a greater tendency to transition from laminar to turbulent. The conditions under which the transition may occur may be calculated utilizing the Froude number. The Froude number is a ratio of the inertial and gravitational forces. If U_0 corresponds to the velocity of the fluid, L_0 corresponds to the depth of the fluid, and G is the acceleration due to gravity, then the Froude number $Fr = \frac{U_0}{\sqrt{GL_0}}$. If the Froude number is substantially less than 1, then the flow tends to be laminar. If the Froude number is substantially greater than 1, then the flow will tend to suddenly transition to turbulent flow. When the flow regime transitions to turbulent flow, the depth of the fluid will tend to suddenly increase. The sudden change in depth is referred to as hydraulic jump. Shear stresses within the fluid are reduced downstream of the jump due to the reduction in net flow velocity resulting from the increase in flow area and because of the increase in film thickness. The length of the transition zone from laminar to turbulent flow will tend to become shorter as the Froude number is increased.

[0013] Note that the Froude number was originally developed for open channel flow where gravity provided the primary resistance to increase in surface elevation which would result from hydraulic jump. Under other flow conditions where the fluid is subjected to rapid change in velocity, the primary acceleration forces may be due more to the rapid change in fluid velocity rather than acceleration due to gravity. Under such conditions, it would become necessary to replace acceleration due to gravity (G) with an expression for the acceleration generated due to the change in velocity. This instantaneous acceleration would be equal to U^2 / R where U is the fluid velocity and R is the instantaneous radius of curvature of the flow path.

[0014] If the open flow channel were to curve “upward” towards the free surface of the fluid, the acceleration resulting from the change in flow direction would be added to G . This tends to increase the resistance to the formation of a hydraulic jump. If U_0 corresponds to the velocity of the fluid and R corresponds to the radius of curvature of the flow path, the rate of acceleration associated with the change in flow path direction would be U_0^2/R . Reducing the radius of curvature would tend to increase the rate of acceleration, which may be increased to match the shear stresses resisting flow (which tend to cause the fluid to pile up on itself and form a hydraulic jump). Moreover, in applications where the flow is not necessarily horizontal and/or when U_0^2/R is significantly greater than G , the initial Froude number may be approximated by

replacing G with U_0^2/R so that $Fr = \frac{U_0}{\sqrt{\frac{U_0^2 L_0}{R}}} = \sqrt{\frac{R}{L_0}}$. Therefore, to maintain a substantially

constant Froude number as the fluid film thickness is reduced, the radius of curvature must be reduced by the same ratio as the film thickness.

[0015] In a 2004 Thesis entitled “Application of Particle Image Velocimetry to the Hydraulic Jump” by Justin M. Lennon, the author described how the Froude number may be utilized to control the formation and location of hydraulic jumps in open channel flows. Referring to table 4.2 and figure 4.6 of the thesis, it would appear that at the velocities he was testing, with a Froude number of approximately 3, the distance from the inlet to the hydraulic jump was approximately 12.5 times the depth of flow. Under these conditions, based upon the Froude number $Fr = 3$, $\sqrt{\frac{R}{L_0}} = 3$ such that $R = 9L_0$ or $L_0 = 0.11R$.

[0016] Note that for this example, if the Froude number were to be greater than 3 at some location upstream of the hydraulic jump, but were to have a value of 3 at the jump, thickness of the film immediately prior to the jump would tend to be greater than if the Froude number were to be held constant at 3 (because of the additional shear energy input within the high Froude number section). Similarly, if the Froude number were to be less than 3 at some point upstream of the hydraulic jump, but were to have a value of 3 at the jump, the distance from the initial point of shear to the hydraulic jump would be increased, and again the thickness of the film immediately prior to the hydraulic jump would be greater than if the Froude number were to be held constant at 3 (because of the additional shear energy input within the longer low Froude number section).

[0017] By maintaining a constant and optimal Froude number as the film thickness is varied, the film thickness may be minimized prior to the formation of a hydraulic jump, and thus the shear energy dissipation rate may be maximized to

optimize the reaction rate. If the depth of flow (represented by L_0) were to be reduced and the flow velocity were to remain constant, to maintain the same Froude number, it would be necessary to reduce the radius of curvature. Thus, a means is required to simultaneously reduce the depth of flow, by maintaining a constant Froude number, while decreasing the radius of curvature.

[0018] Hypothetically, if a round jet of fluid were to impact upon a flat plate, the flow would be forced to flow radially from the center of impact. This would serve to reduce the depth of flow as the “width” of the flow path would increase with diameter. However, this does not provide controlled change in “radius of curvature” of the flow path. In fact, the radius of curvature would be maximum near the point where the depth of flow is maximum rather than where it achieves minimum depth. Similarly, if a round jet were to impact upon the tip of a conical diffuser whose diameter increased in a linear manner away from the tip, the “width” of the flow path would increase linearly with distance from the tip. However, the “radius of curvature” would not decrease in the desired manner to minimize film thickness prior to the formation of a hydraulic jump.

[0019] However, if a round jet were to impact upon the tip of a conical diffuser whose diameter increased more rapidly further from the tip, then the “radius of curvature” of the flow path would tend to be reduced further from the tip and the rate of acceleration would increase. In fact, if, when viewed in cross section, the radius of the conical diffuser were to expand substantially in the form of a quarter ellipse such that the ellipse’s largest radius of curvature would be near the tip and the ellipse’s smallest radius of curvature would be at the base where the flow path transitioned to pure radial

flow, it would be possible to maintain a substantially constant and specific Froude number by adjusting the dimensions of the ellipse.

[0020] Under optimum conditions, the hydraulic jump would occur at the point where the flow path transitions to pure radial flow. Due to variations in fluid characteristics, surface roughness and other factors, the optimum Froude number may vary for differing applications. This in turn may result in different optimal diffuser surface profiles, depending upon the application.

[0021] Therefore, turning now to Fig. 1, a radial flow processor 10 may include an inlet nozzle 12 having a curved wall 14 and an orifice 16. The radial flow processor 10 may further include a conical diffuser 18 arranged in line with the axis of the inlet nozzle 12, such that a fluid jet flowing through the orifice 16 may impact upon the tip 20 of the conical diffuser 18. In addition to the tip 20, the conical diffuser 18 may have a constant diameter portion 22, a base portion 24 and a curved surface 26 extending between the tip 20 and the base portion 24, such that the rate of increase of the diameter of the conical diffuser 18 increases more rapidly than a linear cone further from the tip 20. For example, the conical diffuser 18 may exhibit a substantially quarter-elliptical profile when viewed in cross section. In other words, the shape of the conical diffuser 18 may be substantially defined by a quarter of an ellipse (shown in phantom). In particular, the curvature of the curved surface 26 may be defined by the radius of curvature of the ellipse, which is a function of the major radius, or semi-major axis length a , and the minor radius, or semi-minor axis length b , of the ellipse. Therefore, the dimensions a , b of the ellipse may be selected to adjust the curvature of the curved surface 26 in order to maintain a substantially constant and specific Froude number. Overall, the Froude

number should be within 5% of the desired value, but localized variations should be smaller to avoid surface roughness which would induce excessive turbulence. As previously stated, this may minimize film thickness prior to the formation of a hydraulic jump, and may therefore maximize kinetic energy dissipation rate due to shear to optimize chemical or physical reaction rates.

[0022] The parameters of the required ellipse may be calculated as follows. The radius of the orifice 16 of the inlet nozzle 12 may be designated as r_0 and the initial trial Froude number Fr chosen as 3 (this has proven to be a good starting point for optimization). However, it will be appreciated that any suitable Froude number may be chosen. For example, a Froude number between approximately 2 and 10 may be chosen. Preferably, a Froude number between approximate 3 and 6 may be chosen. The thickness L_0 of the inlet stream at the tip 20 of the conical diffuser 18 equals the inlet jet radius r_0 . Thus, at the tip 20 of the diffuser 18, $L_0 = r_0$. If $Fr = \sqrt{\frac{R}{L_0}}$, and $L_0 = r_0$, by substituting r_0 for L_0 , $Fr = \sqrt{\frac{R}{r_0}}$. Then by squaring both sides of the equation and then multiplying both sides by r_0 , the required radius of curvature R , at the tip 20 of the diffuser 18 becomes $R = r_0 \times Fr^2$. This is also equal to the major radius of curvature R_{max} of the ellipse. The largest radius of curvature of an ellipse $R_{max} = a^2/b$. Setting these equations equal, the minor radius b may be expressed in terms of the major radius a , such that $b = \frac{a^2}{r_0 Fr^2}$.

[0023] As the incoming stream of fluid passes over the curved surface 26 of the conical diffuser 18, moving away from the tip 20, the diameter of the flow path increases

and the film thickness L decreases. At the point where the flow first becomes purely radial, at diffuser radius = b , the film thickness, designated L_b , can be calculated as the area of the inlet jet divided by the circumference at a radius = b , so that $L_b = \frac{\pi r_0^2}{2\pi b} = \frac{r_0^2}{2b}$. To

maintain a substantially constant Froude number, the radius of curvature at b must be

$R_b = L_b \times Fr^2 = \frac{r_0^2}{2b} \times Fr^2$. The minimum radius of curvature of an ellipse $R_{min} = b^2/a$.

Thus, $b^2/a = \frac{r_0^2}{2b} \times Fr^2$. Substituting $\frac{a^2}{r_0 \times Fr^2}$ for b , and simplifying, $a = \sqrt[5]{\frac{(r_0 \times Fr^2)^3 \times r_0^2 \times Fr^2}{2}} =$

$\sqrt[5]{\frac{r_0^5 \times Fr^8}{2}} = r_0 \times \sqrt[5]{\frac{Fr^8}{2}}$. As an example, if $r_0 = 0.125$ centimeters and $Fr = 3$, then $a = 0.631$

centimeters and $b = 0.354$ centimeters.

[0024] It should be appreciated that surface roughness of the conical diffuser 18 should be held to less than 5% of L at a given point to avoid premature transition of the flow regime from laminar to turbulent. Thus, local variations in the radius of curvature R should be held to less than 5% of L at that point, or $0.05 R/Fr^2$.

[0025] It should also be appreciated that the conical diffuser 18 may extend radially past radius = b . In one embodiment, the Froude number may be selected so that a hydraulic jump may occur at radius = b . This may provide the minimum film thickness for a given inlet nozzle diameter and the maximum shear energy dissipation rate.

[0026] It should also be appreciated that the optimal shear energy dissipation rate may vary inversely with inlet nozzle diameter. For example, reducing the inlet

diameter by 50% may permit the shear energy dissipation rate to be doubled while maintaining the same Froude number.

[0027] The conical diffuser 18 may be mounted within the radial flow processor 10 by way of a mounting assembly 27. For example, as shown in Fig. 1, the constant diameter portion 22 of the conical diffuser 18 may be attached to a mounting plate 28, which may be held in place by spokes 30. The spokes 30 may be spaced apart to provide outlet apertures 32, as shown in Fig. 1A. Therefore, fluid exiting the radial flow processor 10 may flow around the mounting plate 28 and between the spokes 30 through outlet apertures 32. In addition or alternatively, apertures may be provided in the mounting plate for allowing fluid to flow therethrough (not shown).

[0028] As shown in Fig. 1, in one embodiment the base portion 24 may include a flat-surfaced bottom side 34 which intersects the constant diameter portion 22 of the diffuser 18 at a substantially right angle. Alternatively, as shown in Fig. 2, where like numerals represent like features, in one embodiment, the base portion 24' may include a curved bottom side 34' having a radius for smoothly transitioning to the constant diameter portion 22'. For example, the bottom side 34' may have a substantially constant radius. The radius may provide fluid flowing from below the base portion 24' with a radial velocity component, and thus may reduce back pressure at diffuser radius = b . This may permit the use of a greater Froude number which in turn may result in a thinner fluid film at diffuser radius = b and a higher kinetic energy dissipation rate.

[0029] In one embodiment, a plurality of conical diffusers 18 may be installed in parallel in a manifold 40 to obtain a desired flow rate while maintaining an optimal

energy dissipation rate, as shown in Fig. 3. In one embodiment, the conical diffusers 18 may each be mounted on a single mounting plate 42, which may be held in place within the manifold 40 by spokes 30.

[0030] In one embodiment, a radial flow processor 10 may be incorporated into a single-pass flow configuration 50, as shown in Fig. 4A. For example, a processing fluid may be drawn from a tank 52 by a pump 54, such as a centrifugal pump. The processing fluid may be pumped into a radial flow processor 10, where the fluid jet may impact upon the tip 20 of a conical diffuser 18. After the fluid passes over the conical diffuser 18, the fluid may exit the radial flow processor 10 via outlet apertures 36. The fluid may then be directed through a discharge or other processor 56, depending on the application.

[0031] In another embodiment, a radial flow processor 10 may be incorporated into a recirculation loop flow configuration 60, as shown in Fig. 4B. For example, a processing fluid may be drawn from a tank 52 by a pump 54, such as a centrifugal pump. The processing fluid may be pumped into a radial flow processor 10, where the fluid jet may impact upon the tip 20 of a conical diffuser 18. After the fluid passes over the conical diffuser 18, the fluid may exit the radial flow processor 10 via outlet apertures 36. The fluid may then be recirculated back to the tank 52, from which it may be again pumped by the pump 54 to the radial flow processor 10 for additional processing.

[0032] While the present invention has been illustrated by a description of various preferred embodiments and while these embodiments have been described in some

detail, it is not the intention of the Applicant to restrict or in any way limit the scope of the appended claims to such detail. Additional advantages and modifications will readily appear to those skilled in the art. Thus, the various features of the invention may be used alone or in numerous combinations depending on the needs and preferences of the user. There may be many variations of the design parameters which may be preferred, and the combination to be used will depend on preferences of the end user (e.g. pump performance parameters). Thus, alternative design parameters and methods of selecting design parameters may be used without departing from the spirit and scope of the present invention.

What is claimed is:

1. A liquid treatment apparatus comprising:
an inlet nozzle including an orifice for directing a fluid jet through the orifice; and
a conical diffuser having a tip, a base portion, and a curved surface
therebetween, wherein the conical diffuser is aligned with the orifice such that the fluid
jet may impact upon the tip, and wherein the curvature of the curved surface is selected
to maintain a constant Froude number.

2. The liquid treatment apparatus of claim 1, wherein a profile of the conical diffuser
when viewed in cross section is defined by a quarter of an ellipse.

3. The liquid treatment apparatus of claim 2, wherein the ellipse is defined by the
following equations:

$$a = r_0 \times \sqrt[5]{\frac{Fr^8}{2}}$$

$$b = \frac{a^2}{r_0 \times Fr^2}$$

where a=the major radius of the ellipse

b=the minor radius of the ellipse

r₀=the radius of the orifice

Fr=the desired Froude number

4. A method of treating a liquid, comprising:
directing a fluid jet through an orifice,
impacting the fluid jet upon the tip of a conical diffuser having a curved surface,
and

maintaining a constant Froude number as the fluid flows toward the base portion of the conical diffuser.

5. The method of claim 4, wherein the curvature of the curved surface is selected to maintain a constant Froude number.

6. The method of claim 5, wherein a profile of the conical diffuser when viewed in cross section is defined by a quarter of an ellipse.

7. The method of claim 6, wherein the ellipse is defined by the following equations:

$$a = r_0 \times \sqrt[5]{\frac{Fr^8}{2}}$$

$$b = \frac{a^2}{r_0 \times Fr^2}$$

where a=the major radius of the ellipse

b=the minor radius of the ellipse

r₀=the radius of the orifice

Fr=the desired Froude number

8. A liquid treatment apparatus as described herein.

9. A method of treating a liquid as described herein.

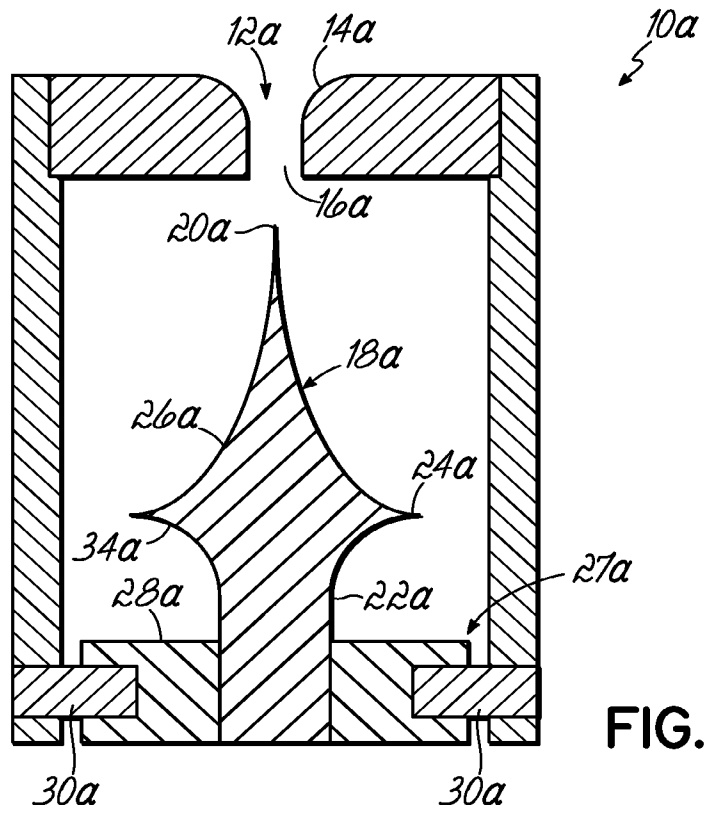


FIG. 2

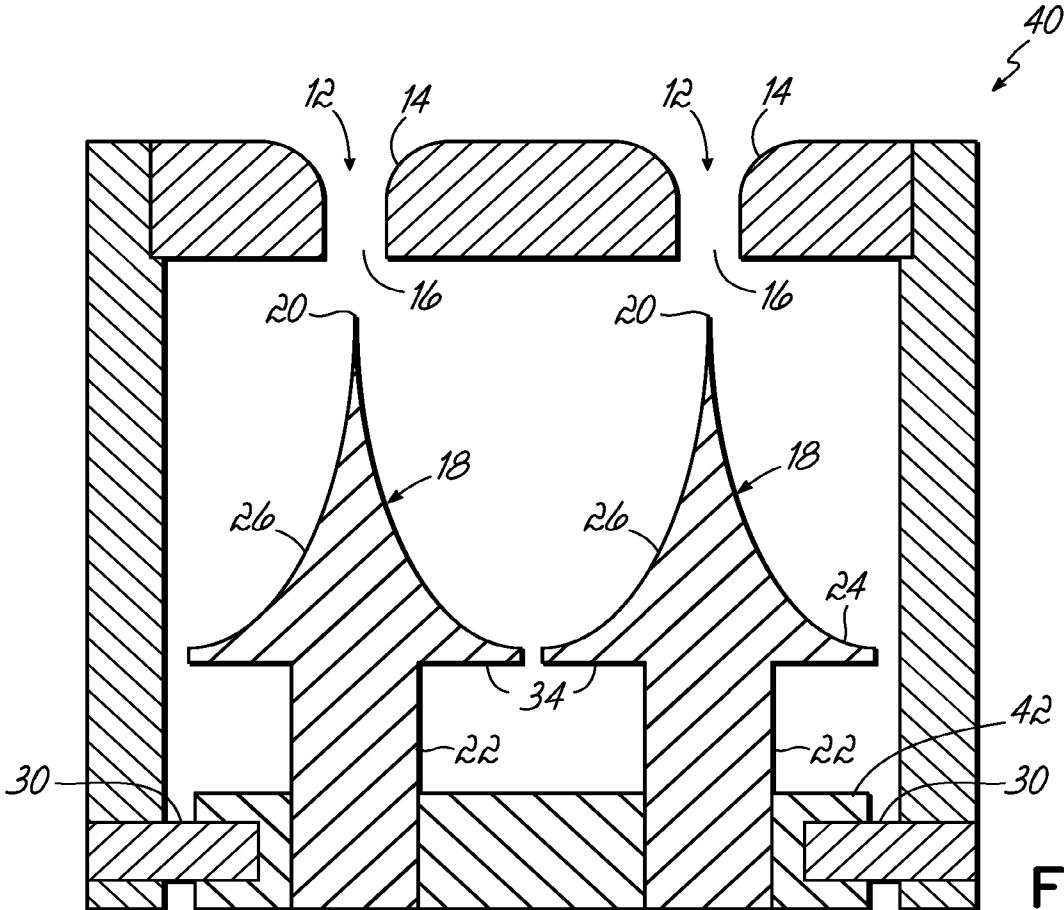


FIG. 3



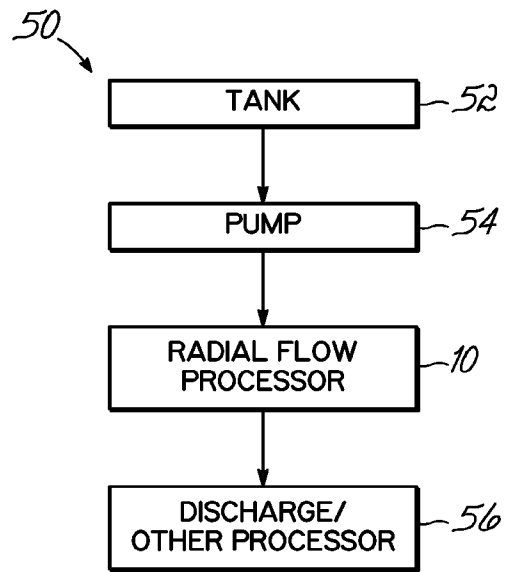


FIG. 4A

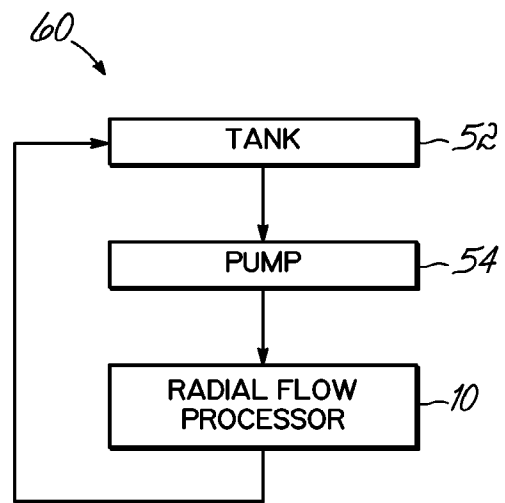


FIG. 4B

Electronic Acknowledgement Receipt

EFS ID:	21698836
Application Number:	62129426
International Application Number:	
Confirmation Number:	4654
Title of Invention:	RADIAL FLOW PROCESSOR AND METHOD FOR USING SAME
First Named Inventor/Applicant Name:	Allison Sprague
Customer Number:	26875
Filer:	Steven W. Benintendi/karyn roades
Filer Authorized By:	Steven W. Benintendi
Attorney Docket Number:	FQI-127P
Receipt Date:	06-MAR-2015
Filing Date:	
Time Stamp:	16:33:18
Application Type:	Provisional

Payment information:

Submitted with Payment	yes
Payment Type	Credit Card
Payment was successfully received in RAM	\$ 130
RAM confirmation Number	3403
Deposit Account	233000
Authorized User	BENINTENDI, STEVEN W

The Director of the USPTO is hereby authorized to charge indicated fees and credit any overpayment as follows:

Charge any Additional Fees required under 37 C.F.R. Section 1.16 (National application filing, search, and examination fees)

Charge any Additional Fees required under 37 C.F.R. Section 1.17 (Patent application and reexamination processing fees)

File Listing:					
Document Number	Document Description	File Name	File Size(Bytes)/ Message Digest	Multi Part /.zip	Pages (if appl.)
1	Application Data Sheet	FQI-127P_ADS.PDF	894846 efe3ee1b82cc117ede4412e8156bcd23fa0085db	no	4
Warnings:					
Information:					
2		FQI-127P_application.PDF	124323 5db39a642fdd5b1a2a3ae08d35db6a03f73b130	yes	14
	Multipart Description/PDF files in .zip description				
	Document Description		Start	End	
	Specification		1	12	
	Claims		13	14	
Warnings:					
Information:					
3	Drawings-only black and white line drawings	Fqi-127P_Drawings.PDF	85082 c37834738000ecf6c070024431e69af9c700c61e	no	3
Warnings:					
Information:					
4	Fee Worksheet (SB06)	fee-info.pdf	29953 61d164b8931ff7cfc63723c5d799fa0647c3718	no	2
Warnings:					
Information:					
Total Files Size (in bytes):			1134204		

This Acknowledgement Receipt evidences receipt on the noted date by the USPTO of the indicated documents, characterized by the applicant, and including page counts, where applicable. It serves as evidence of receipt similar to a Post Card, as described in MPEP 503.

New Applications Under 35 U.S.C. 111

If a new application is being filed and the application includes the necessary components for a filing date (see 37 CFR 1.53(b)-(d) and MPEP 506), a Filing Receipt (37 CFR 1.54) will be issued in due course and the date shown on this Acknowledgement Receipt will establish the filing date of the application.

National Stage of an International Application under 35 U.S.C. 371

If a timely submission to enter the national stage of an international application is compliant with the conditions of 35 U.S.C. 371 and other applicable requirements a Form PCT/DO/EO/903 indicating acceptance of the application as a national stage submission under 35 U.S.C. 371 will be issued in addition to the Filing Receipt, in due course.

New International Application Filed with the USPTO as a Receiving Office

If a new international application is being filed and the international application includes the necessary components for an international filing date (see PCT Article 11 and MPEP 1810), a Notification of the International Application Number and of the International Filing Date (Form PCT/RO/105) will be issued in due course, subject to prescriptions concerning national security, and the date shown on this Acknowledgement Receipt will establish the international filing date of the application.