



- (51) International Patent Classification:  
*B60L 11/18* (2006.01)
- (21) International Application Number:  
PCT/BA2017/000005
- (22) International Filing Date:  
08 September 2017 (08.09.2017)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
BAP173195A 28 June 2017 (28.06.2017) BA
- (72) Inventor; and  
(71) Applicant: MUŠIĆ, Salih [BA/BA]; Voloder 40, 77244 Otoka (BA).
- (74) Agent: ADVOKAT KARABDIĆ Kerim; Hadži Idrizova, 71000 Sarajevo (BA).

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

Declarations under Rule 4.17:  
— of inventorship (Rule 4.17(iv))

(54) Title: WIRELESS TRANSMISSION SYSTEM OF ELECTRICITY FOR ELECTRIC VEHICLES

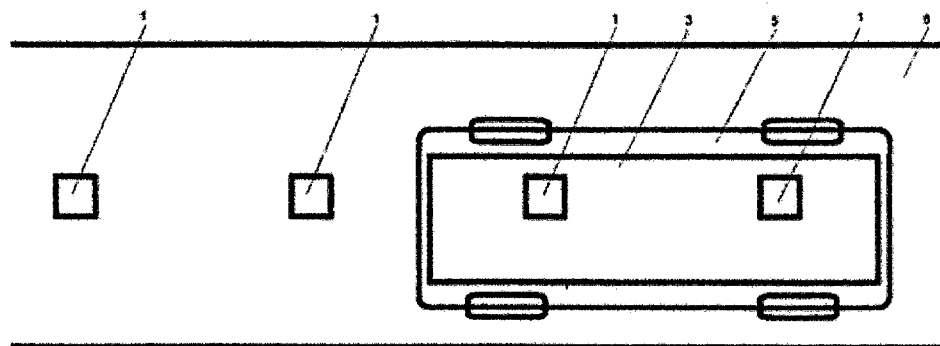


Fig. 3

The basic arrangement of the transmitter (1) and the receiver coil (3) with the vehicle (5) on the road (6).

(57) Abstract: An improved system provides the wireless transmission of electricity and data to consumers temporarily or permanently located or moving in the near of the field designated for the transmission of electricity. Consumers are mostly electric road vehicles. An improved system of the present invention uses coils which are in resonance, but are not of the same dimensions, positioned parallel to each other at small interspacing. The receiving coil, which is incorporated in the vehicle, has a much larger length and width than the transmitter coils, as far as the dimensions of the vehicle allow it. Transmission coils are placed in the line of vehicle movement, in the middle of the pavement, at a distance smaller than, equal to or greater than the length of the vehicle. By measuring the position and movement of the vehicle, the control system determines a favorable moment for switching on and off of individual transmitters, thus achieving an efficient transmission of electricity to the drive system of the vehicle. This system has improved the previous invention according to the patent application BAP132950A.



**Published:**

— *with international search report (Art. 21(3))*

## WIRELESS TRANSMISSION SYSTEM OF ELECTRICITY FOR ELECTRIC VEHICLES

### 1) RELATED APPLICATION DATA

This invention relates to the wireless transmission system of electricity to consumers located or moving in a nearby field designated for the transmission of electricity.

According to the International classification the present invention is classified as: H02J 17/00. Consumers are electric drives and systems in electric vehicles, drives and systems of lifts and other means of transport of living things and materials, and other electrical and electronic systems.

### 2) BACKGROUND OF THE INVENTION

The main problem of electric drive vehicles is the limited range of power required by the amount of energy stored in the vehicle batteries, and the time and place for charge. The prior art technology with all its models shows several basic disadvantages:

- A) Short and limited range / radius of movement,
- B) Insufficient number of charging stations,
- C) Inability to use the vehicle during charging,
- D) The low technological level of the existing solutions using the mechanical corrector of the position of the receiving coil and texture markers,
- E) A large number of transmitters located at a small distance, thus raising installation costs,
- F) Low degree of utilization of the transmission by using single-and single-layer coils.

### 3) FIELD OF THE INVENTION

The wireless transmission of high-frequency electric energy using the transmit and resonant circuit has been known for a long time. Known systems use the same shape and dimensions, the same or greater length of the receiving body as compared to the length of the delivery coil body, and the same width of the delivery and receiving coils of a simple or helical shape. At the moment, there are several types of car battery chargers for electric drive vehicles. The first type is galvanically connected: the vehicle is parked for a long time while charging, and the cable is plugged into the power supply. The second principle allows the battery of a vehicle to be charged wirelessly, but only when it is stationary at a precise location, near the transmitter. The third system is presented in previous invention with application no. BAP132950A, which discloses a solution of using multiple transmitters and one elongated receiving coil. These transmitters are placed in the middle of the traffic lanes, at a distance smaller than the length of the receiving coil body length. The elongated receiving coil is fasten from the underside of the vehicle via the mechanical position corrector. The calibration of the system is made by using texturing markers on the surface of the traffic lanes.

#### 4) SUMMARY OF THE INVENTION

4.1. The technical innovations of present invention increases the radius of electric vehicles, energy efficiency of transmission and safety, and reduces the sensitivity of the system to failures and external influences, the costs for the equipment of the road system, the costs of the vehicle equipment system and simplifies the use and control of electric vehicles.

4.2. The improved wireless transmission system, in relation to the state of the art, enables an efficient electric battery replenishment of the vehicle by increasing its radius of movement and shorter breaks for charging purposes, by introducing technical novelties through the use of more transmitters at a greater distance, and a receiver whose body is extruded and expanded in relation to the active transmitter surface.

4.3. The improved wireless power transmission system, with respect to the state of the art technology, increases the energy transfer efficiency using simple single-layer and helical coils, by introducing technical novelties using spiral and other types of single-layer and multilayer coils.

4.4. An improved wireless transmission, with respect to prior state of the art which utilizes the mechanical position corrector, achieves a reduction of the sensitivity of the system to failures and external influences, by introducing technical novelties through the use of a wide and elongated spiral receiving coil, excludes the use of a mechanical position corrector.

4.5. An improved wireless transmission system, with respect to prior art which utilizes a large number of densely arranged transmitters, achieves a reduction in the cost of equipment of the traffic system, by introducing technical novelties which increases the distance between the transmitters and thus reduces their required number.

4.6. An improved wireless power transfer system according to this invention, with respect to prior art which utilizes a galvanic charge for charging the battery, achieves simplification of the use and control of electric vehicles, by introducing technical novelties from the previous paragraphs.

#### 5) DESCRIPTION OF THE INVENTION

The following text will refer to the details of the embodiment of the invention, whereby one example is illustrated by the accompanying drawings.

5.1. An improved wireless transmission system of the present invention, with respect to the prior art, utilizes a single receiving coil within the vehicle, with several spiral or other winding forms, wrapped single or multi-layered. This coil is installed under the chassis of the vehicle, so there are no other objects between its surface and the pavement.

The surface i.e. the size of this coil should be as large as the dimensions of the vehicle allow, thereby covering the larger surface of the carriageway as much as possible.

5.2. In relation to the prior art of a technique, using a large number of transmitters located directly side by side or with a shorter distance to achieve continuous coverage by the receiving coil, the improved wireless transmission system utilize a large number of transfer coils with several spiral or other winding forms embedded in the road, wrapped single or multi-layered, at a spacing that is shorter, equal to or greater than the length of the receiving coil. Thereby, the achieved continuity of energy transmission according to the previous patent number BAP132950A is lost in some cases, but is compensated by the greater power of the transmitter and with a better quality of the coils.

5.3. The transmission of energy with a high degree of utilization can be achieved at any moment when the greater part or the entire surface of one or more transmitting coils is covered by the surface of the receiver coil. At the moment when one part of the transmitter coil come out out of "shadow" of the receiving coil, based on the determined economic degree, the transmitter will interrupt the emission of the energy.

5.4. Position determination of the receiver in the vehicle motion path will be performed by a control system on the basis of data, that will turn on and off certain transmitters at a certain time interval thereby achieving a high degree of electric power transmission exploitation.

5.5. Thanks to the transmission of electricity, and continuous recharging of the integrated battery, the vehicle would leave the roadside with a recharged battery, which would drastically increase the ultimate range of vehicles on roads that are not adopted for the present type of power transmission.

## 6) DESCRIPTION OF THE POSSIBLE APPLICATIONS OF INVENTION

An improved wireless transmission system of the present invention provides a practical, durable, cost-effective and less sensitive to damages and malfunctions with regard to prior art, and a useful system that can be produced and used economically, including significant improvements in relation to previously known systems.

Further improvement of the present invention without changing its essence and scope is possible.

## 7) LIST OF USED LABELS AND REFERENCES

- 1- The body of the receiving coil
- 2- Windings of the receiving coil
- 3- The body of the transmitter coil
- 4- Windings of the transmitter coil
- 5- Electric vehicle
- 6- Traffic lane

## 8) BRIEF DESCRIPTION OF DRAWINGS

The accompanying drawings included in the description and forming part of the description of the invention are illustrating one of the methods for possible applications of invention, and assisting in explaining the basic principles of the invention:

Figure 1. shows the basic shape of the one-layer transmitter coil with the body (1) and the windings (2).

Figure 2. shows the basic shape of the one-layer receiver coil of the present invention, with the body (3) and the windings (4).

Figure 3. shows the principle arrangement of the bodies of the transmitter (1) and the receiving coil (3) with the vehicle (5) on the road (6).

## PATENT CLAIMS

1. An improved wireless transmission system of electricity and data for electric drive vehicles and systems when moving in a near field, using receiving and transmitting resonant inductive coils, **characterized in that**, said receiving inductive coil is positioned in parallel to the line and the surface of the vehicle movement, in the bottom side of the vehicle, as wider and longer with respect to the vehicle dimension capabilities.
2. An improved wireless transmission system of electricity and data for electric drive vehicles and systems when moving in a near field, **characterized in that**, the receiving coil is made spirally or in some other form, from single-layer or multilayer windings, arranged to fill the most possible or the entire surface of the body.
3. An improved wireless transmission system of electricity and data for electric drive vehicles and systems when moving in a near field, **characterized in that**, parallel to the line of movement, the transmitter coils are placed in the middle of the traffic lane, in a much smaller width with respect to the width of the receiving coil.
4. An improved wireless transmission system of electricity and data for electric drive vehicles and systems when moving in a near field, **characterized in that**, parallel to the line of movement, the transmitter coils are placed in the middle of the traffic lane at a distance smaller than, equal to or greater than the length of the body of the receiving coil.
5. An improved wireless transmission system of electricity and data for electric drive vehicles and systems when moving in a near field, **characterized in that** the receiving coil is positioned in the way to completely cover the surface of at least one transmitter coil with its surface during a vehicle movement and the longest possible time interval, placing both surfaces parallel at the closest possible distance.
6. An improved wireless transmission system of electricity and data for electric drive vehicles and systems when moving in a near field, **characterized in that**, the said system includes measuring the power of high-frequency signals between the transmitter and the receiver, and based on that data enable precise determination of the position, direction, angles and speed of the movement of the receiving coil in relation to the transmitter coils, and hence the position, direction, angles and speed of the vehicle movement.
7. An improved wireless transmission system of electricity and data for electric drive vehicles and systems when moving in a near field, **characterized in that**, the said system improves the efficiency of the transmission of energy by using singlelayer and multilayer spiral or some other coil shapes.
8. An improved wireless transmission system of electricity and data for electric drive vehicles and systems when moving in a near field, **characterized in that**, said system excludes a mechanical carrier and position corrector of the receiving coil.
9. An improved wireless transmission system of electricity and data for electric drive vehicles and systems when moving in a near field, **characterized in that**, traffic control and synchronization of one or more electric vehicles is being achieved through the system and its components.

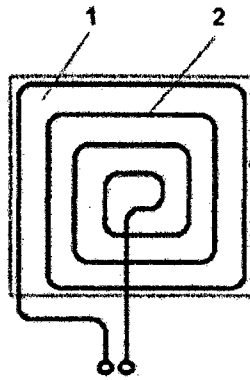


Fig.1

Form of a single-layer coil of the transmitter coil with the body (1) and the winding (2).

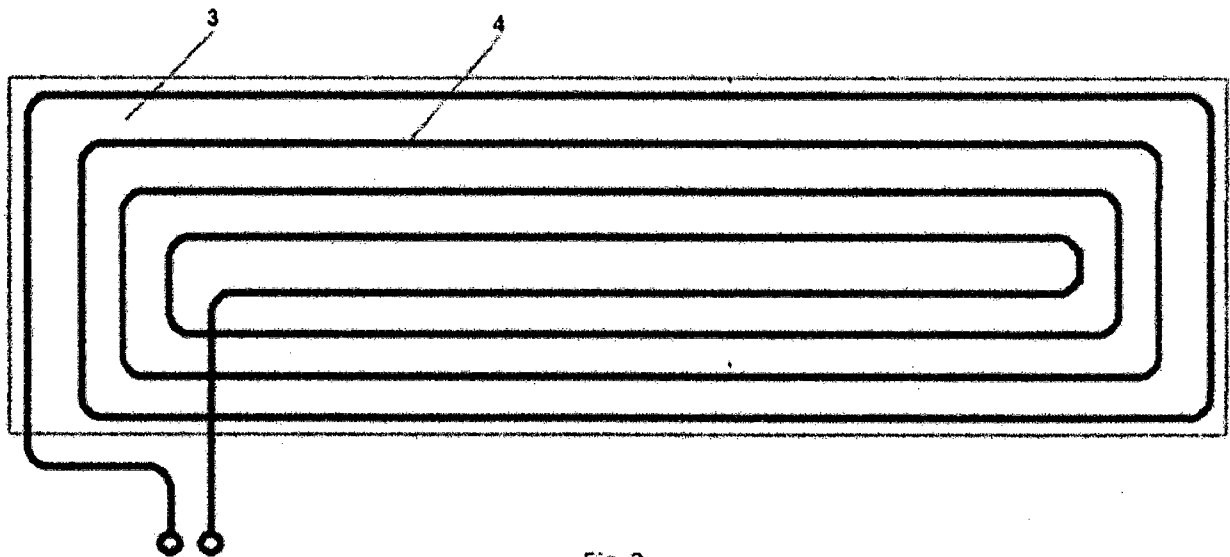


Fig. 2

The basic shape of the one-layer receiver coil of the present invention, with the body (3) and the windings (4).



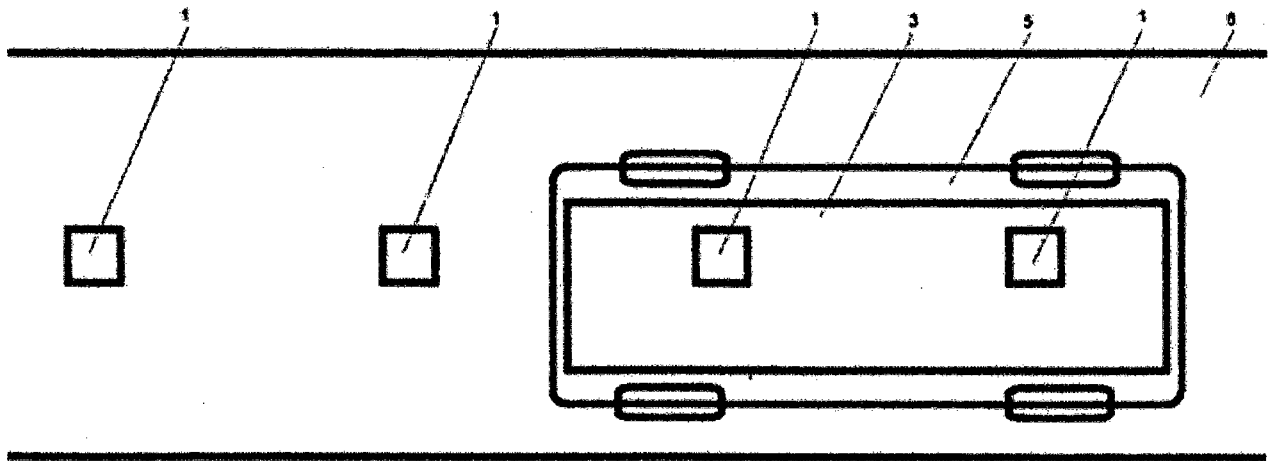


Fig. 3

The basic arrangement of the transmitter (1) and the receiver coil (3) with the vehicle (5) on the road (6).

# INTERNATIONAL SEARCH REPORT

International application No  
PCT/BA2017/000005

**A. CLASSIFICATION OF SUBJECT MATTER**  
INV. B60L11/18  
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
B60L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2009/042214 A1 (GOVERNING DYNAMICS LLC [US]; MASHINSKY ALEX [US]) 2 April 2009 (2009-04-02) abstract paragraphs [0002], [0007] - [0014], [0031] - [0065] figures 1-9	1-9
X	----- WO 2011/059109 A1 (PANASONIC CORP [JP]; KANNO HIROSHI) 19 May 2011 (2011-05-19) abstract paragraphs [0001], [0013] - [0072] figures 1A-7 ----- -/--	1-9

Further documents are listed in the continuation of Box C.

See patent family annex.

\* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier application or patent but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- "&" document member of the same patent family

Date of the actual completion of the international search

13 March 2018

Date of mailing of the international search report

20/03/2018

Name and mailing address of the ISA/  
European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040,  
Fax: (+31-70) 340-3016

Authorized officer  
  
Hagan, Colm

**INTERNATIONAL SEARCH REPORT**

International application No PCT/BA2017/000005
---

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO 2011/059108 A1 (PANASONIC CORP [JP]; KANNO HIROSHI) 19 May 2011 (2011-05-19) abstract paragraphs [0020] - [0075] figures 1A-7 claims 1-21	1-9
Y	----- US 2016/372955 A1 (FACKELMEIER ANDREAS [DE] ET AL) 22 December 2016 (2016-12-22) abstract paragraph [0001] - paragraph [0074] figures 1-7	1-9
A	----- CN 202 632 526 U (LIAONING JIDIAN POLYTECHNIC) 26 December 2012 (2012-12-26) the whole document -----	1-9

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/BA2017/000005

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2009042214 A1	02-04-2009	EP 2195716 A1	16-06-2010
		US 2010231163 A1	16-09-2010
		US 2015028807 A1	29-01-2015
		US 2015035484 A1	05-02-2015
		US 2017136899 A1	18-05-2017
		WO 2009042214 A1	02-04-2009
		-----	
WO 2011059109 A1	19-05-2011	CN 102754299 A	24-10-2012
		EP 2489107 A1	22-08-2012
		JP 5641891 B2	17-12-2014
		JP 5938719 B2	22-06-2016
		JP 2011109903 A	02-06-2011
		JP 2015065804 A	09-04-2015
		US 2011114400 A1	19-05-2011
		WO 2011059109 A1	19-05-2011
-----			
WO 2011059108 A1	19-05-2011	CN 102648560 A	22-08-2012
		CN 105305657 A	03-02-2016
		EP 2465179 A1	20-06-2012
		JP 5909714 B2	27-04-2016
		JP 6179826 B2	16-08-2017
		JP 2011109902 A	02-06-2011
		JP 2016116449 A	23-06-2016
		US 2011114401 A1	19-05-2011
		WO 2011059108 A1	19-05-2011
-----			
US 2016372955 A1	22-12-2016	CN 105340030 A	17-02-2016
		EP 2981980 A1	10-02-2016
		US 2016372955 A1	22-12-2016
		WO 2014206661 A1	31-12-2014
-----			
CN 202632526 U	26-12-2012	NONE	
-----			