




- (51) International Patent Classification:
B62D 5/00 (2006.01)
- (21) International Application Number:
PCT/EP2017/071644
- (22) International Filing Date:
29 August 2017 (29.08.2017)
- (25) Filing Language: English
- (26) Publication Language: English
- (71) Applicants: **THYSSENKRUPP PRESTA AG** [LI/LI];
Essanestraße 10, 9492 Eschen (LI). **THYSSENKRUPP
AG** [DE/DE]; ThyssenKrupp Allee 1, 45143 Essen (DE).
- (72) Inventors: **POLMANS, Kristof**; Strad 6b, 6464 Tarrenz
(AT). **SZEPESY, Imre**; Balázs Bela utca 3. V/57., 1094
Budapest (HU). **SCHACHT, Arne**; An der Nafla 10, 6800
Feldkirch (AT). **DOLD, Markus**; Montjölweg 5, 9475
Sevelen (CH).
- (74) Agent: **LENZING GERBER STUTE PART-
NERSCHAFTSGESELLSCHAFT VON PATENTAN-
WÄLTEN M.B.B.**; Bahnstraße 9, 40212 Düsseldorf (DE).
- (81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP,
KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(54) Title: STEER-BY-WIRE STEERING SYSTEM OF A MOTOR VEHICLE WITH A FEEDBACK ACTUATOR HAVING AN INTEGRATED MRF BEARING

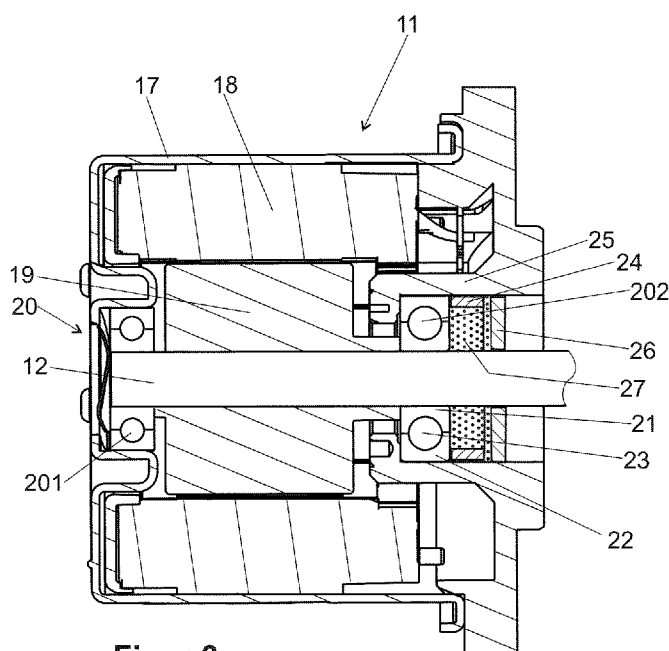

Figur 3

(57) Abstract: The invention relates to a steer-by-wire steering system (1) for a motorized vehicle comprising a feedback actuator (4) to simulate a steering feel to a steering device (5), wherein said feedback actuator (4) has an electric motor (11) with a motor shaft (12) connected to a driver input shaft (6) to be able to transmit a torque, wherein said motor shaft (12) is able to be rotated in at least one rolling bearing (20), characterized in that the rolling elements (23) of the at least one rolling bearing (20) are arranged in a magneto rheological fluid (27) and that the feedback actuator (4) further comprises means (24) to pass a magnetic field through said magnetorheological fluid (27) for stiffening said fluid and restricting movement of said rolling element (23).



(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*

5

10

Steer-by-wire steering system of a motor vehicle with a feedback actuator having an integrated MRF bearing

15

The present invention relates to a steer-by-wire steering system of a motor vehicle according to the preamble of claim 1.

In a steer-by-wire steering system, the vehicle's steering wheel is disengaged from the steering mechanism. Steering movement is achieved by a steering actuator with an electric motor. The steering actuator operates in response to detected values of various steering parameters, such as steering wheel angle and vehicle speed etc. The detected values are communicated electronically to the steering actuator from sensors, whereby the electric motor drives the rack and orients the steerable wheels in the desired direction. The steering actuator could be called steering gear.

Even though the mechanical linkage between the steering wheel and the road wheels has been eliminated, a steer-by-wire steering system is expected to produce the same functions and steering feel as a conventional mechanically linked steering system. The forces generated in moving the road wheels have to be fed back to the steering wheel to provide information for directional control of the vehicle to the driver. The feedback also contributes to a feeling of steering referred to as steering feel. In steer-by-wire steering systems the feedback and steering feel respectively is generated with a feedback actuator connected to the steering wheel.

The patent application DE 10 2015 210 528 A1 discloses a feedback actuator with a damping device including spring elements, which introduces a damping torque into the steering shaft opposite to a steering torque. Drawbacks of this feedback actuator are its large build volume and complex construction.

- 5 It is an object of the present invention to provide an improved feedback actuator in a steer-by-wire steering system of a motor vehicle, which generates a better steering feel while having a space-saving and simple design.

This object is achieved by a steer-by-wire steering system of a motor vehicle
10 having the features of claim 1.

Accordingly, a steer-by-wire steering system for a motorized vehicle comprising a feedback actuator to simulate a steering feel to a steering device is provided, wherein said feedback actuator has an electric motor with a motor shaft connected to a driver input shaft to be able to transmit a torque, wherein
15 said motor shaft is able to be rotated in at least one rolling bearing, and wherein the rolling elements of the at least one rolling bearing are arranged in a magnetorheological fluid and wherein the feedback actuator further comprises means to pass a magnetic field through said magnetorheological fluid for stiffening said fluid and restricting movement of said rolling elements.
20 This magnetorheologic fluid brake element allows for passive force feedback. Feedback actuator motor torque and costs are this way drastically reduced.

Preferably, the means to pass a magnetic field through said magnetorheological fluid includes a ring-shaped coil.

It is advantageous, if the coil is arranged in the at least one rolling bearing
25 housing, wherein the at least one rolling bearing housing is preferably filled with the magnetorheological fluid. The MRF damping device is this way designed as one integrated unit and there is no need for extra packaging space.

In a preferred embodiment, the motor shaft is able to be rotated in an upper
30 bearing and a lower bearing, wherein the upper bearing holds the free end of

the motor shaft and the lower bearing is positioned at the opposite side of the motor's rotor. In that regard, the rolling elements of the lower bearing are preferably arranged in a magnetorheological fluid.

Further the motor shaft can hold a motor pulley as part of a transmission gear, wherein the transmission gear includes a belt connected on one side to the motor pulley and on another side to a pulley arranged on the driver input shaft. Alternatively, the motor shaft can hold a first gear and the drive input shaft can hold a second gear, wherein the first gear meshes the second gear. Preferably, the first gear is a worm and the second gear is a worm wheel.

Alternatively, the motor shaft can be coupled directly to the driver input shaft.

One exemplary embodiment of the present invention is described below with aid of the drawings. In all figures the same reference signs denote the same components or functionally similar components.

Figure 1 shows a steer-by-wire steering system in a schematic illustration,

Figure 2 shows a schematic illustration of a feedback actuator, and

Figure 3 shows a longitudinal cut of an electric motor of the feedback actuator.

Figure 1 is a schematic representation of a steer-by-wire steering system 1 that comprises an actuation control system 2 to actuate road wheels 3 and a feedback actuator 4 to simulate the steering feel of a conventional mechanically linked steering system. A steering device 5, which is in the example a steering wheel, is connected to a driver input shaft 6. Position sensors 7 and torque sensor 8 are operably connected to driver input shaft 6. Position sensors 7 electronically detect the angular position of the driver input shaft 6, while the torque sensor 8 electronically detects and evaluates the torsional force acting on the driver input shaft 6. The angular displacement of the steering wheel 5 is detected, transmitted to the actuation control system 2, processed in the actuation control system 2, and applied to a servo motor 9 to move the steerable road wheels 3 via a rack 101 and pinion 102 system 10.

As shown in figure 2, the feedback actuator 4 includes an electric motor 11 having a motor shaft 12 rotatively driven by the motor 11 and connected to the driver input shaft 6. Since there is no direct mechanical coupling between the actuation control system and the steerable wheels, the driver does not receive any feedback from the road surface through the steering mechanism. Therefore, the feedback actuator 4 generates a reaction torque to the steering wheel 5, based upon a number of steering parameters such as vehicle speed, steering device angle, the steering device angle speed, the steering device turning acceleration, the yaw rate of the vehicle, road surface condition, and further driving parameters of the vehicle.

Formed into or onto the motor shaft 12 is a motor pulley 13 as part of a transmission gear 14. Attached to the motor pulley 13 is a belt 15 driving a pulley 16 connected to the driver input shaft 6.

The electric motor 11 as depicted in figure 3 includes a motor housing 17 incorporating a stator 18. A rotor 19 is configured to rotate together with the motor shaft 12. The motor shaft 12 is allowed to rotate in bearing assemblies 20. The bearing assemblies 20 include an upper bearing 201 and a lower bearing 202, wherein the upper bearing 201 holds the free end of the motor shaft 12 facing away from the transmission gear (not shown) and the lower bearing 202 is positioned at the opposite side of the rotor 19. The lower bearing 202 has an inner bearing ring 21 and outer bearing ring 22 holding the rolling elements 23. At the front side of the outer bearing ring 22 a ring-shaped coil 24 functioning as an electromagnet is arranged. The coil 24 is arranged in the bearing housing 25 with the bearing 202 on one side and a cover 26 on the other side. The bearing housing 25 is filled with a magnetorheological fluid (MRF) 27. The bearing 202 comprises a seal to avoid that the magnetorheological fluid 27 can flow inside the electric motor 11.

When subjected to a magnetic field, the MRF 27 greatly increases its apparent viscosity, to the point of becoming a viscoelastic solid. This way the yield stress of the MRF can be controlled very accurately by varying the magnetic field intensity.

Thus, when a magnetic field is created by running an electric current from a power source, not shown, through the coil 24, the magnetorheological fluid 27 becomes stiffened (higher viscosity), so that a higher torque to rotate the ball bearing 202 and thereby a higher torque to rotate the motor shaft 12 is
5 necessary and the movement of the motor shaft will be braked. Furthermore, the current could be increased and the magnetorheological fluid 27 becomes solidified therebetween, preventing movement of ball bearing 202 and thereby preventing movement of the motor shaft 12. When the power is off and the magnetorheological fluid 27 is a free-flowing liquid, it offers little resistance to
10 the ball bearing's movement.

The bearing according to the present invention makes it possible to continuously control the damping rate by changing the viscosity of the MRF. End position lock of the steering wheel with high torque is possible, as well as curb-push off and curb damage protection. Even in case of electric motor
15 failure damping can be carried out.


Ball bearings are illustrated, but other types of rolling elements could be substituted therefor.

Claims

- 1 A steer-by-wire steering system (1) for a motorized vehicle comprising a
5 feedback actuator (4) to simulate a steering feel to a steering device (5),
wherein said feedback actuator (4) has an electric motor (11) with a
motor shaft (12) connected to a driver input shaft (6) to be able to
transmit a torque, wherein said motor shaft (12) is able to be rotated in
at least one rolling bearing (20), **characterised in that** the rolling
10 elements (23) of the at least one rolling bearing (202) are arranged in a
magnetorheological fluid (27) and that the feedback actuator (4) further
comprises means (24) to pass a magnetic field through said
magnetorheological fluid (27) for stiffening said fluid and restricting
movement of said rolling elements (23).
- 15 2 Steer-by-wire steering system according to claim 1, **characterised in
that** the means to pass a magnetic field through said magnetorheological
fluid (27) includes a ring-shaped coil (24).
- 3 Steer-by-wire steering system according to claim 2, **characterised in
that** the coil (24) is arranged in the at least one rolling bearing housing
20 (25).
- 4 Steer-by-wire steering system according to claim 3, **characterised in
that** the at least one rolling bearing housing (25) is filled with the
magnetorheological fluid (27).
- 5 Steer-by-wire steering system according to one of the preceding claims,
25 **characterised in that** the motor shaft (12) is able to be rotated in an
upper bearing (201) and a lower bearing (202), wherein the upper
bearing (202) holds the free end of the motor shaft (12) and the lower
bearing (202) is positioned at the opposite side of the motor's rotor (19).
- 6 Steer-by-wire steering system according to claim 5, **characterised in
30 that** the rolling elements (23) of the lower bearing (202) are arranged in

a magnetorheological fluid (27).

- 7 Steer-by-wire steering system according to one of the preceding claims,
characterised in that the motor shaft (12) has a motor pulley (13) as
part of a transmission gear (14), wherein attached to the motor pulley
5 (13) is a belt (15) driving a pulley (16) connected to the driver input
shaft (6).

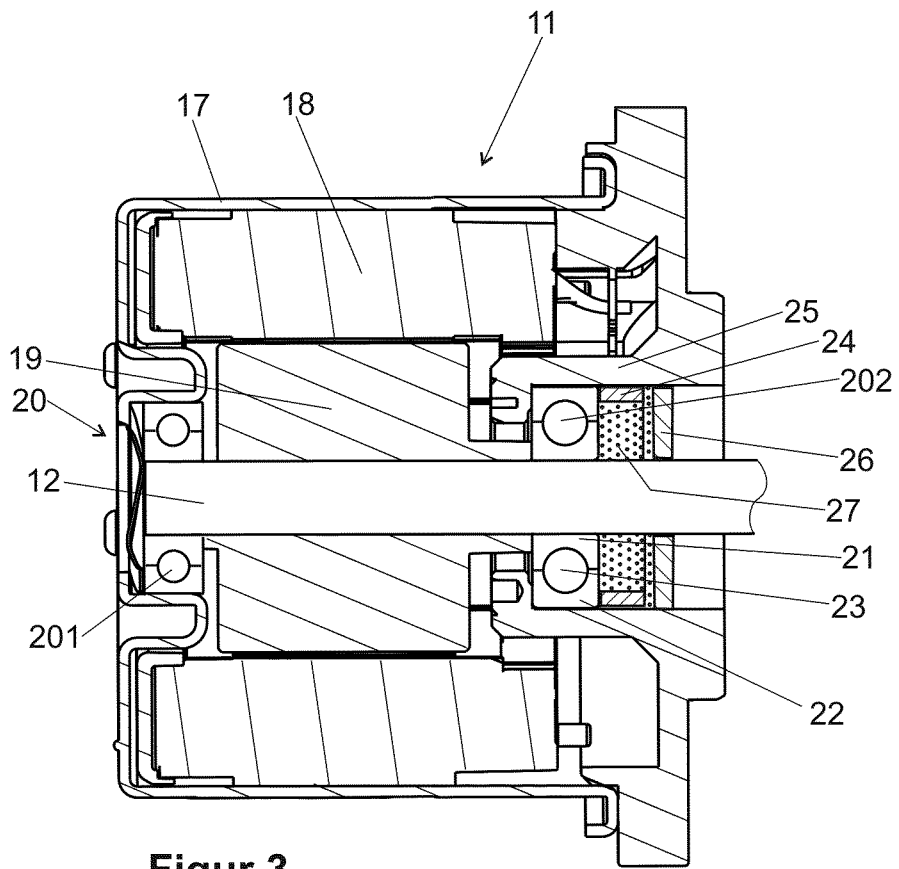

Figur 3

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2017/071644

A. CLASSIFICATION OF SUBJECT MATTER
INV. B62D5/00
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED
Minimum documentation searched (classification system followed by classification symbols)
B62D G04C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2001/052893 A1 (JOLLY MARK R [US] ET AL) 20 December 2001 (2001-12-20) paragraph [0040] - paragraph [0089]; figures 1-11 -----	1-7
A	DE 603 03 081 T2 (DELPHI TECH INC [US]) 20 July 2006 (2006-07-20) paragraph [0022] - paragraph [0045]; figures 1-15 -----	1-7
A	WO 2017/001696 A1 (INVENTUS ENG GMBH [AT]) 5 January 2017 (2017-01-05) page 49, line 9 - page 66, line 22; figures 1-11 -----	1-7

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier application or patent but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- "&" document member of the same patent family

Date of the actual completion of the international search 20 April 2018	Date of mailing of the international search report 07/05/2018
--	--

Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer Kamara, Amadou
--	--

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No PCT/EP2017/071644

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2001052893 A1	20-12-2001	EP 1412843 A1	28-04-2004
		JP 2004538520 A	24-12-2004
		US 2001052893 A1	20-12-2001
		WO 03014907 A1	20-02-2003

DE 60303081 T2	20-07-2006	DE 60303081 T2	20-07-2006
		EP 1332946 A2	06-08-2003
		US 2003146037 A1	07-08-2003

WO 2017001696 A1	05-01-2017	CN 107735748 A	23-02-2018
		DE 102015110633 A1	05-01-2017
		EP 3317749 A1	09-05-2018
		WO 2017001696 A1	05-01-2017
