



- (51) **International Patent Classification:**  
C10G 9/16 (2006.01) C10B 43/02 (2006.01)
- (21) **International Application Number:**  
PCT/US2018/053092
- (22) **International Filing Date:**  
27 September 2018 (27.09.2018)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**  
15/720,202 29 September 2017 (29.09.2017) US
- (71) **Applicant: PRAXAIR TECHNOLOGY, INC.** [US/US];  
10 Riverview Drive, Danbury, CT 06473 (US).
- (72) **Inventor: SCHARMACH, William, J.;** 184 Sandpiper Lane, Grand Island, NY 14072 (US).
- (74) **Agent: SCHWARTZ, Lurie, A.** et al.; Praxair, Inc., 10 Riverview Drive, Danbury, CT 06810 (US).
- (81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME,

MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

**Declarations under Rule 4.17:**


- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))

**Published:**

- with international search report (Art. 21(3))

(54) **Title:** METHOD FOR WEAKENING AND REMOVING COKE AND CARBONACEOUS DEPOSITS

Figure 1:

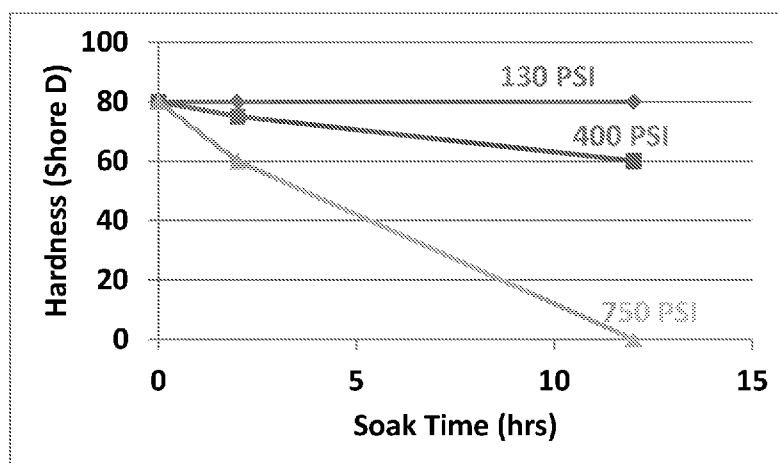

The impact on the hardness of anthracite coal from CO<sub>2</sub> exposure at 70°F at various pressures over time.

(57) **Abstract:** The present invention concerns a method of weakening and removal of coke or carbonaceous material which deposits as a result of thermal cracking of hydrocarbons on the inner walls of coils, piping, tubing, and in general, hydrocarbon processing equipment.



## METHOD FOR WEAKENING AND REMOVING COKE AND CARBONACEOUS DEPOSITS

### Field of the Invention

[0001] The present invention relates to a method of weakening and removal of coke or carbonaceous material which deposits as a result of thermal cracking of hydrocarbons on the inner walls of coils, piping, tubing, and in general, hydrocarbon processing equipment. The method includes filling the equipment with a pressurized gaseous stream, holding the equipment at pressure for a designated period, and then removing the pressurized gas from the equipment.

### Description of the Related Art

[0002] Equipment utilized in petroleum refining often requires routine maintenance as a result of the formation of coke and carbonaceous material within the equipment components and on wall surfaces. As utilized herein, “coke” will be understood to include solid products such as carbon deposits derived from the destructive distillation of materials such low-ash, and low-sulfur bituminous coal, whereas “carbonaceous materials” includes coal, hydrocarbon products, and fossil fuels that contain carbon and hydrogen molecules. The coke deposits reduce effective heat transfer to the process stream and impede flow (or increase in pressure drop through diameter reduction), which can result in an increase in the cost of operation both in pumping and heating. The reduced heat transfer and the insulating properties can result in hot spots generated on the metal tubes leading to potential bulging, warping, and failure. The carburization and the diffusion of carbon into metal may also lead to premature tube failure from reduced ductility and weakening by microstructural fractures.

[0003] Furnace heaters are one example of equipment susceptible to coking. The furnace coils can be cleaned through a multitude of different methods, discussed in detail below. These methods include:

- a. pigging: abrasion of coke with a studded pig, routed through a pipeline using

water pressure;

b. steam-air decoke (SAD): oxidation of the coke by burning with air and a steam quench;

c. spalling: removal of coke by thermal shock through alternately throttling of steam or other heat fluid through a pipe from high to low flow rates ;

d. SandJet<sup>™</sup>: a Praxair / Union Carbide process (U.S. Patent No 4,203,778 A), where Coke is abraded by flowing an abrasive-laden high-velocity gas stream through the tubing system.

**[0004]** Steam-air decoking is a well-established technology, which dates back to the beginning of the refining industry itself. It can be effective at removing combustible coke material independent of tube structure such as changes in tube size and deformation. It is usually performed by the refinery operators. SAD can take a long time to complete with a typical turnaround of 36 to 48 hours. The length of time is generally required in order to reduce metallurgical damage. It requires capital investment in piping for steam and air. SAD can also struggle with removing of non-combustibles including inorganic materials such as such as clay, calcium, silica, salt, copper, iron, and sulfur compounds. In addition, SAD is a difficult process that requires precision control for optimal burning. There is potential for “runaway” coke combustion and damage or rupture of tubing and equipment if the process is not properly controlled. SAD also produces emissions from the coke combustion including CO, CO<sub>2</sub>, and H<sub>2</sub> that require treatment.

**[0005]** Spalling (or online spalling) on the other hand, requires the oil to be replaced with steam which is flowed at a controlled velocity. The tubes are then cooled causing the coke to “spall off” the inside of the tube due to the changes in thermal expansion between the coke and metal tube walls. Online spalling has several advantages as it can be carried out while the furnace is still in service, and is seen as more environmentally friendly than SAD with fewer emissions. However, spalling is seen as not as effective as other methods, and it may require a subsequent alternative treatment to remove remaining coke deposits. In fact, spalling is sometimes seen as a way to extend the on-stream time before offline cleaning is required. Spalling can potentially damage tubing from repeated expansion and contraction of tubes. Steam velocities also need to be carefully controlled as spalled coke deposits can abrade / erode tubing / piping systems.

[0006] Pigging, or hydraulic pigging, utilizes hardened studs that remove coke through mechanical scrapping of the furnace wall. Pigging is capable of removing all types of coke (including noncombustible material) from tubing walls and is generally faster to complete than SAD and spalling, with no harmful gases to generated. Water is generally screened and recycled to reduce overall water usage. The drawbacks for pigging is that the pigs have a set size and tolerance between the pig and the tube walls, which can cause complications in tubing systems with changing diameters and header systems. Pigging can also abrade the tubes and can groove walls resulting in metal loss and weakening of the tube; particularly at U-bends. The water produced is contaminated with the system contents and requires special disposal. Pigging also requires the furnace (or a portion of the furnace) to be placed out of service. Once pigging is complete, the system will need to be dewatered and inerted before it is brought back online.

[0007] SandJet™ is a fast cleaning method as compared to pigging and SAD with completion in approximately 12 hours with no emissions or polluted water produced. The process is dry, meaning the furnace can be immediately brought back into service. The process uses a stream of gas, typically nitrogen, to propel cleaning media through the furnace tubing or pipeline at high velocity. The process is generally repeated while monitoring the pressure drop through the system until the desired pressure drop is achieved by removal of the coke deposits from the inner walls. SandJet™ requires the pipe or tube to be “flowable,” meaning free of obstructions and demonstrably open for the flow of gas. The process may require a pretreatment such as steam or nitrogen drying the furnace and/or a swab pig or wire brushes to dry the pipes. SandJet™ though has difficulty tackling “hard” and vicious cokes and in a similar manner to pigging requires the furnace (or a portion thereof) to be taken offline. The process results in a minimal metal loss and can affect surface polishing which reduces subsequent coke formation.

[0008] The present invention utilizes sorption of gas into the coke in order to weaken and spall the coke from the wall face. As utilized herein, the term “sorption” shall mean the physical and chemical process by which one substance becomes attached to another and is seen as the concomitant phenomenon of absorption and adsorption. The term “adsorption” is used to describe the physical adhesion of molecules to the surface of another, while the term “absorption” is used to describe the physical uptake

of molecules into the volume of another or the dissolution of molecules within another phase. "Dissolution" is the process by which a substance forms a solution in a solvent (in this case a solid solvent). Carbon-based materials such as coal have shown an affinity for uptake of gases such as methane and CO<sub>2</sub>. This is particularly relevant for coal materials in the application of CO<sub>2</sub> sequestration, as adsorption and dissolution of CO<sub>2</sub> into the coalbed causes significant mechanical changes within the coal structure including swelling and plasticizing. It has been found that these and similar mechanical effects can be leveraged in a decoking operation and used to remove or aid in the removal of coke from the walls of furnace tubes and other refinery equipment.

**[0009]** The process as described herein is similar to the technique of spalling and can also be completed while the system is online. The process may be seen more attractive in certain scenarios as compared to traditional online spalling as the process fluid is replaced with a "dry gas" rather than steam; eliminating a post-dewatering step. In the same manner, it can also be used to maintain the operability of a system before a more thorough decoking is required. The process may also be better suited for preserving inhibiting oxide layers such as Cr<sub>2</sub>O<sub>3</sub> which reduce coke formation, tube carburization, and thermal shock. Mechanical erosion may result in its removal and increased likelihood and severity and of coke formation and tube failure. The key difference is that the expansion and breakdown of coke from traditional spalling is the result of heating, whereas the present invention employs the sorption of gas to achieve the same result. The valves and lines provided must also be able to sustain the pressures required for adequate coke uptake of gas.

**[0010]** Generally, for adsorption mechanisms (especially as compared to CO<sub>2</sub> sorption in coal), lower temperatures and higher pressures improve CO<sub>2</sub> adsorption volumes, meaning a cold, high-pressure gas is best suited for shifting the equilibria for greater uptake of CO<sub>2</sub> by the coal. The swelling mechanism, however, is driven by dissolution and in a similar fashion, the amount of CO<sub>2</sub> that is dissolved also increases with pressure. If confined, the swelling creates strain through compression. This strain has resulted in a plasticizer behavior in coals and with the resulting changes in volume can lead to mechanical failure. By quick decompression of the treatment gas, further failures are allowed to occur including initiation and growth of fractures and fragmentation of bulk material.

[0011] Other objects and aspects of the present invention will become apparent to one skilled in the art upon review of the specification, drawings and claims appended hereto.

## SUMMARY OF INVENTION

[0012] The present invention is a method for the removal of coke or other carbon-based deposit in a pressurizable enclosure by exposure to a gas under pressure for an extended period of time, followed by depressurization of the enclosure. Specifically, one aspect of the invention provides a method for weakening and removal coke or other carbonaceous deposits on the inner walls of coils, piping, tubing, and other general hydrocarbon processing equipment by exposing said equipment to a pressurized stream of gas, allowing sorption of gas into the coke, and then depressurizing the coke of said gas. The pressure of said treatment gas is generally in the range of about 50 and 5,000 psig.

[0013] The treatment gas utilized in the method includes carbon dioxide, and alternatively, carbon dioxide mixtures. These mixtures include:

- a. Carbon dioxide in some portion of the treatment gas (above 1 % by mass)
- and,
- b. A secondary component gas consisting of one or more of the following:
    - i. Methane or higher hydrocarbon
    - ii. Hydrogen
    - iii. Nitrogen
    - iv. Oxygen

[0014] The method optionally includes a means of removing weakened or dislodged material from the equipment, such as:

Flowing a gas stream, such as nitrogen, through the apparatus; Pressurizing and depressurizing with nitrogen gas;

Performing a SandJet or other mechanical cleaning operation on the equipment.

## **BRIEF DESCRIPTION OF THE DRAWINGS**

[0015] The objects and advantages of the invention will be better understood from the following detailed description of the preferred embodiments thereof in connection with the accompanying figures wherein like numbers denote same features throughout and wherein:

Figure 1 is a graph illustrating the impact on the hardness of anthracite coal from CO<sub>2</sub> exposure at various pressures.

Figure 2 shows the removal of coke from a coked furnace tube from an atmospheric distillation unit before and after 12 hours of CO<sub>2</sub> exposure at 750 psi.

Figure 3 is an exemplary embodiment of the process schematic of the present invention.

## **DETAILED DESCRIPTION OF THE INVENTION**

[0016] The present invention concerns a method for weakening and removal of carbonaceous material and coke inclusive of a two-step process of pressurization followed by depressurization. The process can be repeated as necessary in order to maximize the result.

[0017] The system/equipment must be able to hold gas at a pressure substantially higher than ambient pressure. This may necessitate the installation of pressure isolation valving or various ports capped and plugged in order to retain the integrity of the treatment gas within the target system. The system is then filled with the treatment gas at pressures ranging from about 50 to 5,000 psi, and may be either isolated or continually attached to the treatment gas source in order to maintain system pressure as the gas is sorbed into the coke deposits. After a set period of time, the treatment gas is released, and a subsequent flow of gas or liquid may be used to remove any deposits that have become dislodged from the wall.

**[0018]** An example and resulting impact of such treatment is shown in Figure 1 using anthracite coal. The treatment gas, in this example, approximately 100% CO<sub>2</sub>, was injected into the system in a vapor state. A liquid state can also be used, but economics favor a vapor treatment. The treatment was carried out at ambient temperature (70°F) generally which eliminates the need for heating and cooling during treatment. The system was filled with CO<sub>2</sub> at pressures of 130, 400, and 750 psi. At 750 psi, this is the pressure which is close to, but below the condensation pressure of CO<sub>2</sub> at ambient temperature. The hardness of the anthracite coal was measured using a durometer before and after exposure with the starting hardness of the coal estimated to be around 80 on the Shore D scale. A reduction in hardness correlates to the highest sorption volumes which is achieved by long soak times at high pressures. Therefore samples exposed to the highest pressures for the longest periods of time resulted in the greatest reduction in hardness and were most easily friable. Although this example has been done in relation to CO<sub>2</sub> and other gases such as methane, higher hydrocarbons, oxygen, nitrogen, and mixtures thereof can be utilized. Preferably, the gas predominantly carbon dioxide in a concentration of anywhere from 1 to 100%. Where the carbon dioxide is less than 100% it is a mixture with a secondary gas component in a concentration of 0 to 99%, wherein the secondary gas is selected from methane, higher hydrocarbon, hydrogen, nitrogen, and oxygen.

**[0019]** Figure 2 shows a similar treatment of an 8-inch pipe segment from an atmospheric distillation pre-heater or furnace. The sample was treated at ambient temperature for 12 hours at a pressure of 750 psig. The image on the left depicts the pipe segment before treatment, while the image on the right is the pipe segment after treatment and a significant portion of the coke deposit removed from the pipe segment. No subsequent treatment was used in the removal of the coke layer from the pipe walls. The example treatment was able to remove 84.3% by mass of coke from the tube walls. The remainder of the coke material, which has been weakened at this stage, can be removed by a subsequent step of either pigging, SAD, spalling or SandJet™, as mentioned above.

**[0020]** Figure 3 shows an exemplary embodiment of the method described. The system includes CO<sub>2</sub> and potentially another gas 100 that is used to feed an optional pump 101. The pump 101 is used to bring the gas to treatment pressure if the gas source 100 is not already. Otherwise, the pump may be excluded from treatment. It is



assumed that the equipment targeted for treatment 103 is at an already low- pressure state, likely atmospheric pressure. The gas flows from the source 100 to the target equipment 103 via an optional isolation valve 102. Isolation valve 104 is closed to prevent any of the treatment gas from leaving the target equipment 103. Once the target equipment is at treating pressure, the equipment may be isolated from the source using isolation valve 103 or left in fluidic contact with the equipment in order to maintain pressure as gas is sorbed into the coke material. After a set time (generally around 6 to 12 hours) the gas is relieved quickly (generally less than 1 hr) from the target equipment 103 via isolation valve 104. The gas source prior to venting is either isolated using isolation valve 103 or removed from the process. These steps can be repeated as necessary until the desired results are achieved.

**[0021]** Although various embodiments have been shown and described, the present disclosure is not so limited and will be understood to include all such modifications and variations as would be apparent to one skilled in the art.

We Claim:

1. A method for the weakening of coke or other carbonaceous deposits on the inside walls of coils, piping, tubing, and other general hydrocarbon processing equipment comprising: exposing said equipment to a pressurized gas, allowing sorption of gas into the coke or other carbonaceous deposit, and then depressurizing the equipment and contents of said gas, wherein said gas includes carbon dioxide.
2. The method of claim 1, further comprising sealing and pressurizing said equipment.
3. The method of claim 1, wherein the pressure of the gas stream is in a range between about 50 and 5,000 psi.
4. The method of claim 1, wherein the gas is a mixture containing carbon dioxide and one or more secondary component gases.
5. The method of claim 4, wherein the secondary component gas is selected from methane or a higher hydrocarbon.
6. The method of claim 4, wherein the secondary component is gas is hydrogen.
7. The method of claim 4, wherein the secondary component gas includes oxygen.
8. The method of claim 4, wherein the secondary component gas includes nitrogen.
9. The method of claim 1, wherein the gas and/or the coke or other carbonaceous deposit is heated above ambient temperature during the treatment.
10. The method of claim 1, wherein depressurization is at sufficient rate to remove loosened deposits from the furnace.


11. The method of claim 1, comprising the additional subsequent step of passing a flow of gas through the equipment to sweep the loosened deposits from the equipment.

12. The method of claim 1, comprising the additional subsequent step of performing mechanical cleaning treatment to remove weakened deposits from equipment.

13. The method of claim 12 wherein the mechanical cleaning treatment is completed by SandJet™.


14. The method of claim 12 wherein the mechanical cleaning treatment is completed by pigging.

Figure 1:

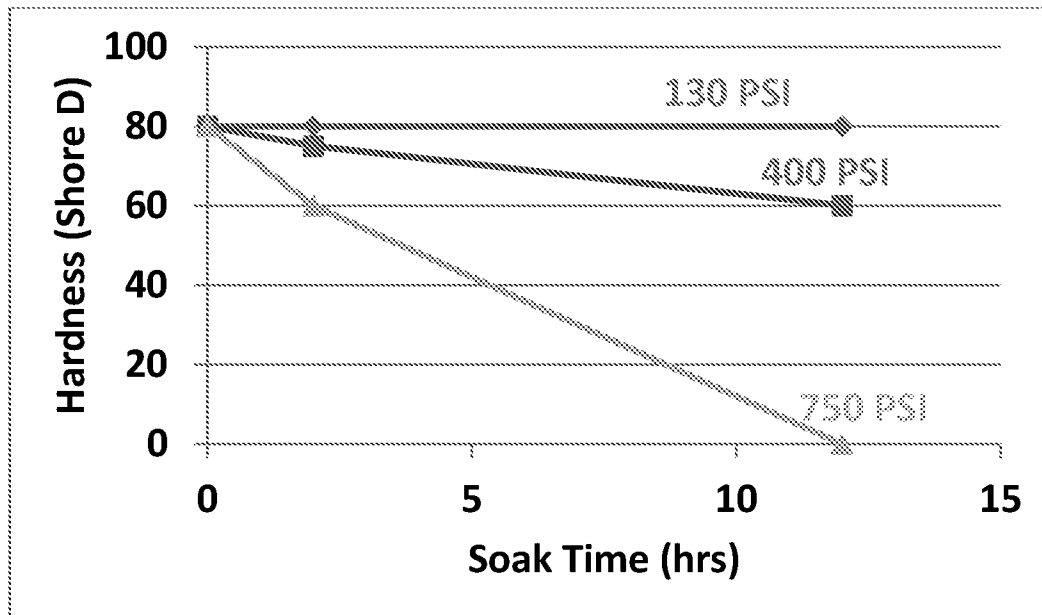


The impact on the hardness of anthracite coal from CO<sub>2</sub> exposure at 70°F at various pressures over time.

Figure 2:

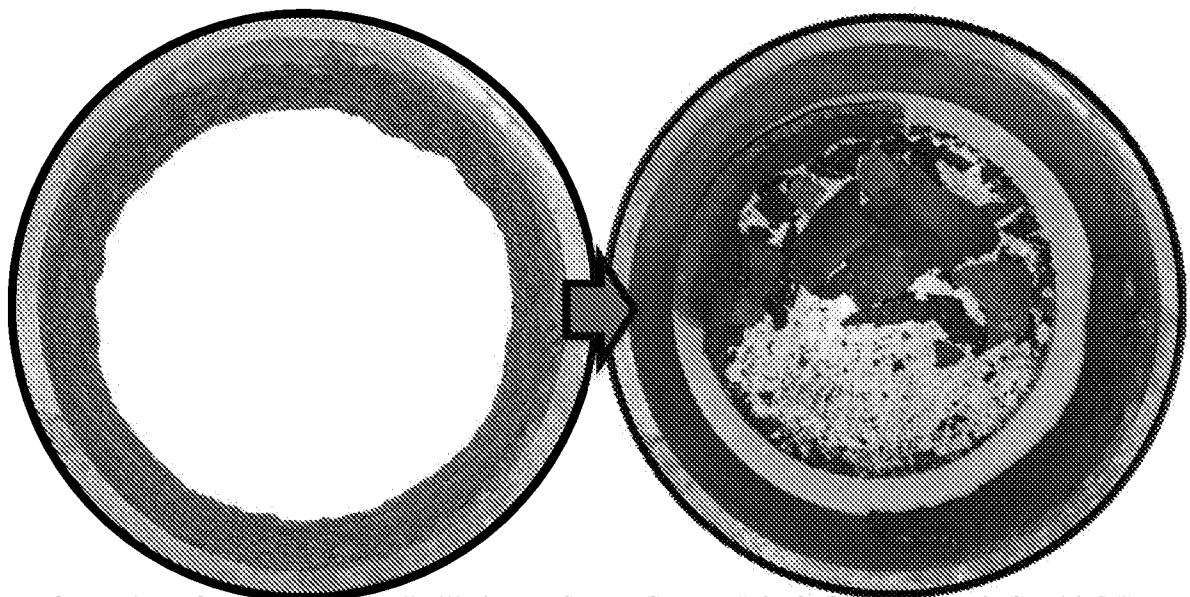

Images of a section of an atmospheric distillation preheater furnace tube before (left) and after (right) exposure to 750 psig CO<sub>2</sub> at 70°F for 12 hours.

Figure 3:

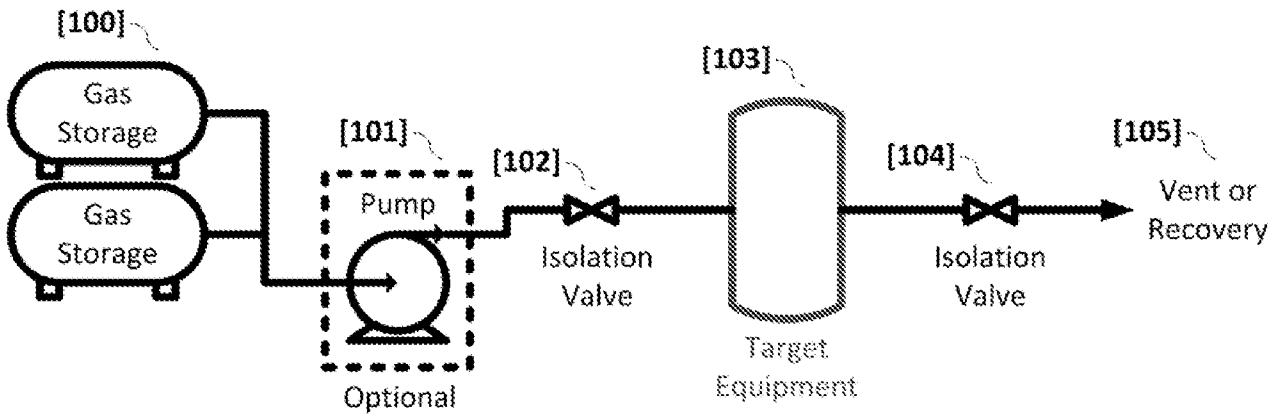

An example equipment layout for completing coke weakening / removal

**INTERNATIONAL SEARCH REPORT**

International application No  
PCT/US2018/053092

**A. CLASSIFICATION OF SUBJECT MATTER**  
 INV. C10G9/16 C10B43/02  
 ADD.  
 According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**  
 Minimum documentation searched (classification system followed by classification symbols)  
 C10G C10B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)  
 EPO-Internal, WPI Data

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	JP H05 156261 A (NIPPON KOKAN KK) 22 June 1993 (1993-06-22) paragraph [0012]; claim 1 -----	1-14
X	JP 2000 219883 A (NIPPON STEEL CORP) 8 August 2000 (2000-08-08) claims 3,4 -----	1-14
X	US 2014/060586 A1 (HILL REX A [US]) 6 March 2014 (2014-03-06) paragraph [0008]; claims 1,2 -----	1-14

Further documents are listed in the continuation of Box C.

See patent family annex.

\* Special categories of cited documents :

<p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier application or patent but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p>	<p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>"&amp;" document member of the same patent family</p>
---	---

Date of the actual completion of the international search  14 December 2018	Date of mailing of the international search report  02/01/2019
---	--

Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer  Gzil, Piotr
--	---------------------------------------

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2018/053092

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
JP H05156261	A	22-06-1993	NONE
JP 2000219883	A	08-08-2000	NONE
US 2014060586	A1	06-03-2014	US 2014060586 A1 06-03-2014
			WO 2014039694 A1 13-03-2014