



- (51) International Patent Classification:
F16B 5/02 (2006.01)
- (21) International Application Number:
PCT/US2015/062042
- (22) International Filing Date:
22 November 2015 (22.11.2015)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
P201401038 23 December 2014 (23.12.2014) ES
- (71) Applicant: ILLINOIS TOOL WORKS INC. [US/US];
155 Harlem Avenue, Glenview, Illinois 60025 (US).
- (72) Inventor: ARISA BUSQUEST, Juame; Prat de la Riba 3,
4o2a, E-08206 Sabadell (Barcelona) (ES).
- (74) Agent: HAUPTMAN, Benjamin J.; Hauptman Ham,
LLP, 2318 Mill Road, Suite 1400, Alexandria, Virginia
22314 (US).
- (81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG,
MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM,
PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC,
SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ,
TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU,
TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,
DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))

[Continued on next page]

- (54) Title: COMPENSATION NUT

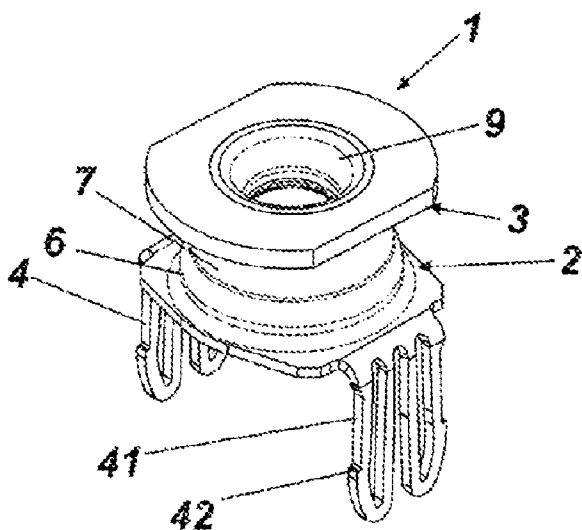


Fig. 1

(57) Abstract: A compensating nut formed by the assembly of a nut (2) and a bolt (3) and used to attach an application to a surface or panel while maintaining a variable distance between said surface and the supporting element or chassis in which the nut is attached, preventing this distance from collapsing when said application attachment bolt is tightened, that includes a slightly flexible plastic annular body, such as an overmolded sleeve (9) of vulcanized plastic, held tightly in the cylindrical axial internal hollow of said bolt (3).

Published:

— *with international search report (Art. 21(3))*

COMPENSATION NUT

SCOPE OF THE INVENTION

The present invention relates to a compensation nut, compensation nuts being nut-and-bolt assemblies used to
6 attach an application to a surface or panel while maintaining a variable distance between said surface and the supporting element or chassis in which the nut is attached, preventing this distance from collapsing when the application attachment bolt is tightened, with an improved connection between the application attachment
12 bolt and the bolt of the compensation nut.

BACKGROUND

Compensation nuts used to attach an application to a panel or bearing surface for said application that make it possible to maintain the variable space between said
18 panel and the frame or support surface in which said nut is anchored are known.

These nuts incorporate a bolt with a hollow interior. This bolt is screwed onto the thread of the nut, which is inverted, i.e. the dextrorotary movement of the bolt
24 causes same to move backwards and the levorotary rotation of same causes the bolt to move into the nut.

The inside of this hollow bolt has engagement members so that, when the bolt used to attach the application is inserted, rotating said application attachment bolt also
30 drags (rotates) the bolt of the compensation nut.

In the known operation of this type of nut, when the application bolt is screwed into the hollow of the bolt of the compensation nut, this dextrorotary rotation firstly causes the backward movement of the bolt of the compensation nut until the entire separation space
6 between the panel supporting the application and the frame or chassis of the vehicle in which the compensation nut is attached has been covered, as mentioned above.

Continuing to tighten the application attachment bolt
12 secondly causes the forward movement of said bolt into the bolt of the compensation nut and attachment of the application to be installed.

Patent EP2796729 describes a compensation nut of the type described in which the bolt of the compensation nut
18 has internal connection members formed by legs oriented from the surface towards the axial shaft of said bolt. The design of this nut is complex because, since the thickness of said bolt of the compensation nut is limited, external zones of the thread of said bolt have to be sacrificed to provide material for said internal
24 connection elements.

One of the problems with the solution described relates to the deterioration of the thread of the application attachment bolt caused by friction of the internal metal legs of the compensation bolt. This prevents re-use of
30 the assembly installed.

The primary objective of the present invention is to provide a simpler, cheaper and more efficient means for facilitating threaded engagement or locking of the application attachment bolt in the bolt of the compensation nut, without damaging said bolt.

6

Another of the objectives of the present invention is to provide a compensation nut that is lighter overall and cheaper to manufacture.

This and other advantages of the present invention are set out in the description provided below.

12

SHORT DESCRIPTION OF THE INVENTION

The present invention relates to a compensation nut, compensation nuts being nut-and-bolt assemblies used to attach an application to a surface or panel while maintaining a variable distance between said surface and the supporting element or chassis in which the nut is attached, preferably used in the automobile industry, in which a plastic overmolding is applied to the internal wall of the hollow bolt, said overmolding having a conical end, at the insertion aperture for the application attachment bolt, before narrowing into a cylindrical body of lesser hollow section than the previous body.

18

24

In the preferred embodiment, the compensation nut is made of metal and specifically a treated material such as carbon steel. The part may be treated against corrosion.

30

The nut part of the compensation nut includes, in the preferred embodiment of same, attachment springs to the orifice or slot formed in the attachment surface, and has two groups of two legs on each side that are joined
6 at the end of same and aligned such that two of said legs on one side are internal and face one another and the other two legs are external and act elastically to lock against the edge of the slot. The material used to form said spring (carbon steel) results in a tight and firm attachment leaving no clearance in the orifice of
12 the slot of the attachment surface, and which adequately withstands the working vibrations of the part. This is substantially different from other attachments for similar uses in which the attachment elements are substantially rigid and do not tightly fit the orifice or adequately withstand the vibrations of the vehicle.

18

It should also be noted that the arrangement of the springs in the present invention, which act as attachment elements and are aligned in pairs on either side of the nut, enable the part to be positioned correctly.

24

The nut also includes an internally threaded cylinder the base of which is joined to the base surface of the nut by a dome-shaped structure that provides elasticity to the part and adequate residual stress in consideration of the stress forces when working the
30 compensation nut.

The compensation nut includes a hollow bolt with an upper flange from which the shaft of the bolt originates. The thread of said bolt and the thread of the nut match so that they can be screwed together, in the inverse direction to the standard direction. When the bolt is
6 rotated rightwards (dextrorotary), the bolt moves backwards. When the bolt is rotated leftwards (levorotary), the bolt moves forwards. All of the foregoing is provided for the purpose of the compensation function described above.

12 The internal cylindrical wall of said hollow bolt has hooks oriented downwards and indentations. Both elements provide, when the plastic is overmolded as a sleeve in the hollow of the bolt, gripping zones between the overmolding and the bolt that prevent any relative movement once the overmolded plastic has cooled,
18 shrinking axially.

The inventive objectives sought are achieved in this manner, resulting in a compensation nut that is cheap and made of lightweight material, since the metal parts are made from a laminar surface, by deformation and
24 punching, and on account of the structural arrangement of same.

SHORT EXPLANATION OF THE DRAWINGS

To better explain the invention, this description is
30 accompanied by two sheets of drawings provided solely as nonlimiting illustrations of the invention.

Figure 1 is a perspective view of a compensation nut according to the present invention.

Figure 2 is a perspective view from one side of the compensation nut in the previous figure, showing a possible elevation of the bolt in relation to the nut.

Figure 3 is a perspective view of another example embodiment of a compensation nut according to the present invention, in which the legs of the nut are different from the example shown in the previous figures.

Figure 4 is a view similar to the view in figure 2, with the bolt elevated, but this time with reference to the embodiment in figure 3.

Figure 5 is a cross-section of the bolt portion of the compensation nut.

Figure 6 is a cross-section of the whole of the compensation nut.

Figure 7 is a magnified detail of the central portion of the cross-section in the previous figure.

DETAILED EXPLANATION OF THE INVENTION

The present invention relates to a compensation nut formed by the assembly of a nut (2) and a bolt (3) and used to attach an application to a surface or panel while maintaining a variable distance between said surface and the supporting element or chassis in which

the nut is attached, preventing this distance from collapsing when the application attachment bolt is tightened.

In one of the preferred embodiments of the invention, 6 the nut (2) is formed by a base from which descend elements for attachment to the support surface, for example the chassis of the vehicle. These attachment elements may be of different types and forms. Figure 1 shows descending springs formed by pairs of legs joined at the ends of same. These pairs of legs are aligned, on 12 either side of the nut, in a single line, two of said legs (one from each group) therefore being an external leg. When said springs (4) are inserted into the attachment slots provided in the attachment surface, these external legs act elastically as a spring, being compressed against the edge of the orifice.

18

These external legs (41) also have a recess or step (42) that acts as a disengagement stop in relation to the attachment surface. This type of structure is very favorable for the compensation nut according to the invention since it enables the nut to grip the 24 attachment surface without any clearance and from any penetration length in the slot provided in the attachment surface.

In other possible embodiments of the invention, for example the embodiment shown in figures 3 and 4, other 30 types of gripping elements may be used, such as legs (5) with a descending section (51) and an ascending continuation (52) that acts flexibly against the face of

the attachment surface that has been passed, by means of a surface (53).

In the present invention, the compensation nut 1 is metal and preferably made of carbon steel. It may have
6 been treated against corrosion and/or have a coating such as a nickel coating. The nature of the material used to make the compensation nut (1) ensures that the attachment of the attachment elements (4 and 5) to the slot in the attachment surface is simultaneously a firm and tight attachment with no clearance, maintaining good
12 elastic behavior in response to the vibrations of the vehicle, for example, and unlike the prior art in which the substantial lack of plasticity and rigidity of the joining of same facilitate the disconnection from the attachment support of the compensation nut (1).

18 The nut (2) has, projecting outwards in the opposite direction to the legs (5) and springs (4), a cylinder (7) with an internal thread, the join with the starting base being formed by a dome (6) or tapered body with a circular base and walls with a curved section. This arrangement affords elasticity and resistive stress to
24 the whole of the nut (2) against the forces and stresses it is subjected to when in use.

The direction of the internal thread of the cylinder (7) is opposite to the normal thread direction. Consequently, when a bolt is rotated to the right in said thread it
30 moves away from the base of the nut, and when it is rotated in a levorotary direction, to the left, it is tightened.

This nut (2) is complemented by a bolt (3) the inside of which forms an axially hollow cylinder, said bolt having an external thread counteracting the thread of the nut (2) into which it is screwed. As shown in the 6 embodiments in the figures, this bolt has an upper base or surface from which the shaft of the bolt (3) originates.

Figures 1 and 3 show the compensation nut (1) in a closed and in-service position, in which the height of 12 the part is minimal, i.e. not entirely screwed in and tightened to the nut in order to enable it to be easily unscrewed, the bolt (3) having a very limited gap. Conversely, in figures 2 and 4, the same compensation nut (1) is in an open position, with a greater height equivalent to the space to be covered between panel and 18 chassis.

The present invention includes an overmolded portion (9) made of a suitable plastic in the cylindrical axial hollow inside the bolt (3) that is conical in the direction of the position of the nut (2), as shown in 24 figure 6 and in the detail in figure 7. In other words, it has a first section (12) that is wider in terms of free diameter inside same than a second section (13) having a narrower internal aperture.

To prevent the clearance of the application attachment 30 bolt in the initial conical section (12) requiring same to be held to prevent it falling, this section has a

circular annular projection (14) that elastically holds this application bolt to prevent same from falling.

This cone of overmolded plastic material (9) inside the bolt (3) with a free section that is considerably
6 smaller than the free section of the application attachment bolt (not shown) shows how this bolt strongly grips said overmolding (9), interferes with the overmolding (9), engaging with same and enabling the rotation of the hollow bolt (3) in the nut (2). The first larger section (12) of the hollow in said
12 overmolding (9) enables the application attachment bolt to be positioned within the bolt (3).

The plastic material used is hard enough to perform the function of same and is also flexible, like hard rubber, because it has been vulcanized in the preferred
18 embodiment. When the application bolt enters the section of the overmolding that is narrower than said bolt, the thread of same presses against the plastic, interfering with said material. This enables the compensation bolt (3) to be dragged by the application bolt. Furthermore, when the application bolt is withdrawn from the
24 compensation bolt (3), said compensation bolt (3) can be reused because the elasticity of the plastic has been compressed and the surface of same has only been partially eroded. Indeed, no less than ten installation and removal operations are possible with the compensation nut according to this embodiment.

30

In another possible embodiment, the invention provides for a part similar to the overmolding (9) to be pressed

into the inside of the bolt (3). Naturally, the internal surface of the bolt (3) can be varied to better suit this embodiment, along with the type of plastic material used, to improve adherence to the bolt (3). Similarly to the previous case, the application bolt works against
6 said plastic material by interference and not by friction, enabling the device to be reused.

When an application is attached by screwing, locking the attachment bolt in the overmolding (9), this rotation firstly causes the rotation by dragging of the bolt (3),
12 which expands the height of the compensation nut (1), as shown in figure 2 for example, until the entire hollow between the panel and the surface of the chassis is covered.

Once rotation of the application attachment bolt no longer permits expansion of the compensation nut (1),
18 the application is then attached by screwing, this bolt penetrating the hollow bolt (3).

The application is removed by inverting the process. The levorotary rotation of the application bolt contracts
24 the compensation nut (1), which once closed cannot move any further in that direction, such that subsequent rotations release the attachment of the application and extract the application attachment bolt from the hollow of the bolt (3).

30 This characteristic arrangement of the present invention is very beneficial, since not only is it simple to manufacture (being free of the structural complexities

of the prior art), but it also provides a good grip of the application bolt, which enables the hollow bolt (3) to be dragged without thereby damaging said application bolt, thereby enabling the parts to be reused.

- 6 However, realization of this convenient solution required apparently insuperable obstacles to be overcome. Understandably, since the rotation of the overmolding (9) has to be able to drag the hollow bolt (3) by rotating same, there must be a good join between the overmolding (9) and the body of the hollow bolt (3).
- 12 However, the technique of overmolding the plastic in the form of an internal sleeve in the hollow of the bolt (3) presents the difficulty that the plastic contracts when it cools, and it does so not by expanding towards the walls of the hollow bolt (2), but by contracting towards the axial shaft of said bolt, losing the join with same.

18

- The solution to this drawback is to provide gripping elements in the hollow inside of said bolt (3) in which the overmolding (9) is attached, enveloping and filling same. This involves creating hooks (10) in the walls of the inside of said hollow bolt (3). These hooks (10) are
- 24 oriented towards the position of the nut (2), preventing the overmolding (9) from coming out.

- It should also be taken into account that both the nut (2) and the hollow bolt (3) are made from a laminar material by deformation and punching. The part is made
- 30 as light as possible so that, in consideration of the qualities of the structural material and the treatments it may receive, it provides suitable mechanical behavior

in accordance with the function it is intended to perform.

Consequently, the hooks (10) are made from the material forming the walls of the hollow bolt (3). As shown in
6 figure 3, this can be done by hollowing material from the internal wall of the bolt (3), creating an indentation (11) above said hooks (10). Both the indentations (11) and the respective hooks (10) provide excellent anchoring points for the overmolding (9) such that, despite the slight shrinkage of said overmolding
12 (9) caused by cooling, the join and grip between same and the bolt (3) is not lost.

The structure of the compensation nut (1) according to the present invention simplifies the conventional installation of same using automatic tightening tools.
18 The operative places the compensation nut in the hollow to be covered and presents the application bolt through the supporting element of said application, before screwing in the assembly. In practice, this is done in a single screwing operation in which the operative can tighten the compensation nut (1) described at high speed,
24 even 900 rpm, which is possible on account of the performance of the part and the interference between said application bolt and the plastic overmolding (9) which provides excellent tractive grip.

It is understood that any details of finish and form
30 that do not alter the essence of the invention may vary in this case.

CLAIMS

1. A COMPENSATION NUT formed by an assembly of a nut (2) and a bolt (3) and used to attach, using a bolt, an application to a surface or panel while maintaining a
6 variable distance between said surface and the supporting element or chassis in which the nut is attached, preventing this distance from collapsing when said application attachment bolt is tightened, CHARACTERIZED IN THAT it includes a slightly flexible plastic annular body (9) held tightly in the cylindrical
12 axial internal hollow of said bolt (3).

2. The COMPENSATION NUT as claimed in the above claim, CHARACTERIZED IN THAT said plastic annular body (9), in the wall of the internal hollow of said bolt (3), has a first conical portion (12) of greater free diameter
18 followed by another portion (13) of narrower and considerably lesser free diameter than the section of the application attachment bolt.

3. The COMPENSATION NUT as claimed in any one of the above claims, CHARACTERIZED IN THAT said plastic annular
24 body (9) has an annular projection (14) for retaining the application attachment bolt.

4. The COMPENSATION NUT as claimed in any one of the above claims, CHARACTERIZED IN THAT the internal wall of said bolt (3) of the compensation nut (1) has hooks (10)
30 oriented towards the position of the nut (2), said hooks (10) being covered by said plastic annular body (9).

5. The COMPENSATION NUT as claimed in any one of the above claims, CHARACTERIZED IN THAT the internal wall of said bolt (3) of the compensation nut (1) has indentations (11) covered by said plastic annular body (9).

6

6. The COMPENSATION NUT as claimed in any one of the above claims, CHARACTERIZED IN THAT said plastic annular body (9) is an overmolded sleeve of vulcanized plastic.

12

7. The COMPENSATION NUT as claimed in any one of the above claims, CHARACTERIZED IN THAT said nut (2) is formed by a base from which descend flexible elastic springs or legs (4, 5) for gripping the attachment chassis or surface of the compensation nut (1).

18

8. The COMPENSATION NUT as claimed in the above claim, CHARACTERIZED IN THAT said nut (2) has, projecting outwards in the opposite direction to said flexible elastic springs and/or legs (4, 5), a cylinder (7) with an internal thread, the joint with the starting base being formed by a dome (6) or tapered body with a circular base and walls with a curved section.

24

9. The COMPENSATION NUT as claimed in either one of claims 7 and 8, CHARACTERIZED IN THAT said springs (4) are formed by groups of two pairs of legs joined at the ends thereof, said springs (4) being aligned in pairs in a single line on either side of said nut (2).

30

10. The COMPENSATION NUT as claimed in the above claim, CHARACTERIZED IN THAT the external legs (41) of said springs (4) have a recess or step (42).
11. The COMPENSATION NUT as claimed in either one of
6 claims 7 and 8, CHARACTERIZED IN THAT said flexible elastic legs (5) have a descending section (51) and an ascending continuation (52) that acts flexibly against the face of the attachment surface that has been passed, by means of a surface (53).
- 12 12. The COMPENSATION NUT as claimed in any one of the above claims, CHARACTERIZED IN THAT said bolt (3) has an upper base or surface from which the shaft of same originates.
13. The COMPENSATION NUT as claimed in any one of the
18 above claims, CHARACTERIZED IN THAT the thread of said bolt (3) and the internal thread of the cylinder (7) of said nut (2) match to enable same to be screwed together in a direction opposite the tightening direction of the application bolt, i.e. dextrorotary to remove the bolt (3) and levorotary to insert the bolt (2).
- 24
14. The COMPENSATION NUT as claimed in any one of the above claims, CHARACTERIZED IN THAT it is metal.
15. The COMPENSATION NUT as claimed in the above claim, CHARACTERIZED IN THAT it is made of heat-treated carbon
30 steel.

16. The COMPENSATION NUT as claimed in the above claim, CHARACTERIZED IN THAT it has received an anti-corrosion treatment and/or a coating.

6 17. The COMPENSATION NUT as claimed in any one of the above claims, CHARACTERIZED IN THAT the hardness and composition of said plastic annular body (9) enable the use of an attachment bolt of an application at a speed of rotation of at least 900 rpm.

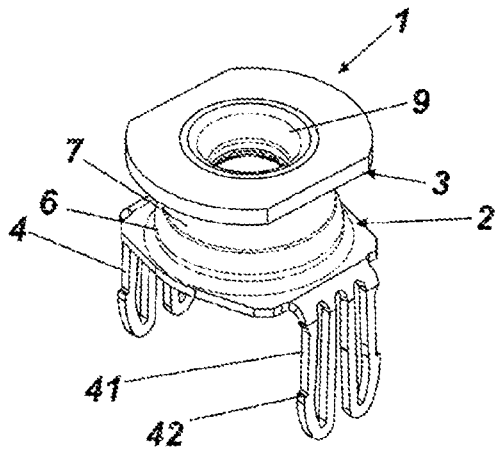


Fig. 1

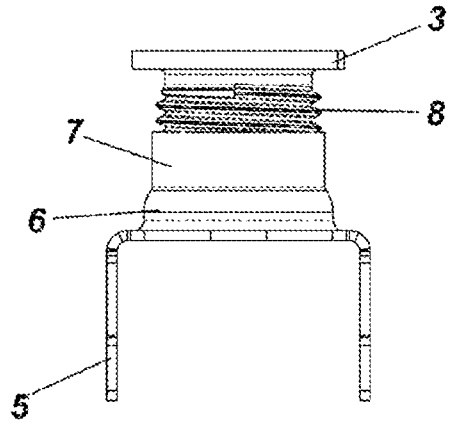


Fig. 2

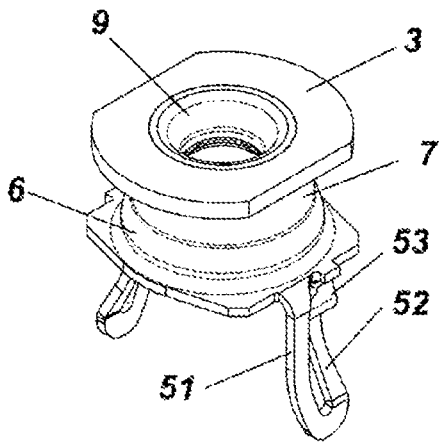


Fig. 3

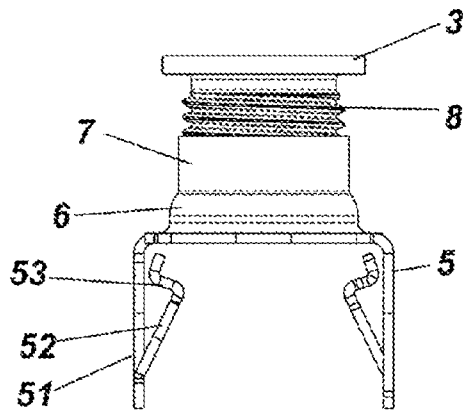


Fig. 4

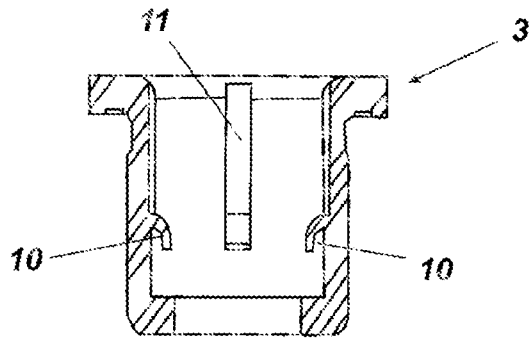


Fig. 5

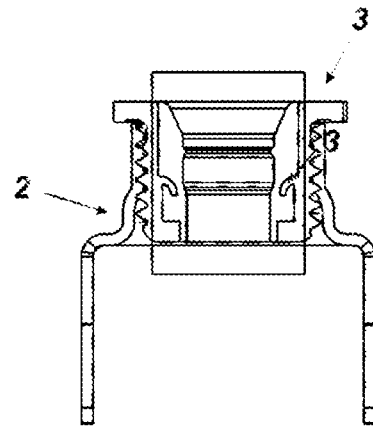


Fig. 6

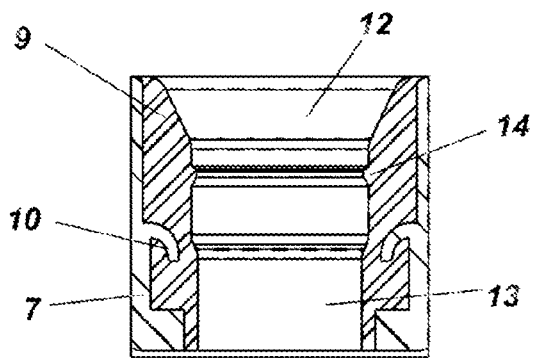


Fig. 7

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2015/062042

A. CLASSIFICATION OF SUBJECT MATTER
INV. F16B5/02
ADD.
According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED
Minimum documentation searched (classification system followed by classification symbols)
F16B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 1 217 222 A1 (TEXTRON VERBINDUNGSTECHNIK [DE]) 26 June 2002 (2002-06-26) abstract; figures 1,2 -----	1-3,6, 12-17
X	EP 1 970 574 A2 (AOYAMA SEISAKUSHO [JP]) 17 September 2008 (2008-09-17) paragraph [0019]; figures 1,4,5 -----	1,2,7, 12-14
X	DE 203 14 003 U1 (BOELLHOFF GMBH [DE]) 13 November 2003 (2003-11-13) page 12, line 21 - line 29; figures 1-4 -----	1,4-6, 14-17
X	WO 2014/120707 A1 (ILLINOIS TOOL WORKS [US]) 7 August 2014 (2014-08-07) page 9, line 14; figures 1-6 -----	1,7-14

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier application or patent but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- "&" document member of the same patent family

Date of the actual completion of the international search 21 January 2016	Date of mailing of the international search report 02/02/2016
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer Fritzen, Claas

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No PCT/US2015/062042

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 1217222	A1	26-06-2002	AT 364795 T 15-07-2007
			EP 1217222 A1 26-06-2002
			ES 2284445 T3 16-11-2007
			PT 1217222 E 16-08-2007

EP 1970574	A2	17-09-2008	CN 101265930 A 17-09-2008
			EP 1970574 A2 17-09-2008
			JP 2008223937 A 25-09-2008
			US 2009067921 A1 12-03-2009

DE 20314003	U1	13-11-2003	DE 20314003 U1 13-11-2003
			EP 1515054 A1 16-03-2005
			EP 1696138 A1 30-08-2006
			ES 2273135 T3 01-05-2007
			US 2005053449 A1 10-03-2005

WO 2014120707	A1	07-08-2014	CN 104981617 A 14-10-2015
			EP 2951447 A1 09-12-2015
			ES 2482992 A1 05-08-2014
			US 2015377266 A1 31-12-2015
			WO 2014120707 A1 07-08-2014
